

Catalog # **95**
Item number: **10908**
Description:
 PVC 150 Blk FS x Brushed FR
International Designation:
 N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 3.00 in

Belt Strength:

Tension Rating (PIW) 150 PIW

Construction:

Compound Top Cover Woven Poly
 Color Black

Top Cover Description Friction Surface

Compound Bottom Cover Woven Poly

Bottom Cover Description Brushed

Number of Plies 1

Overall Gauge (in) (3.18 mm) 1/8 in

Unit Weight- lb/PIW 0.0560 lbs/PIW

Carcass Type Interwoven Polyester

Compound Black PVC

Temperature Range (°F)- High 180 °F

Temperature Range (°F)- Low 0 °F

Splice Instructions:

Splice Step No
 Splice Finger Yes

Other:

Static Conducting No
 Cross Rigid No
 High Heat No
 Impression Top No
 Oil Resistant Yes
 Fire Resistant Yes
 FDA Approved No

Suggested Fasteners:

Flexco Plate/Rivet N/A
 Flexco Hinged N/A
 Alligator Staple #125
 Clipper Lace #1
 Alligator Lace #15

Special Characteristics:

Has proven to be the longest wearing, best performing, most problem free package handling belt available today. Economical, general purpose specifications ideal for a variety of slider bed, applications. Offer low stretch, high fastener holding ability and superior rip, tear, and gouge resistance

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

PVC GENERAL


PVC 150 BLK FS X BRUSHED FR

95

Catalog Number

10908

Part Number

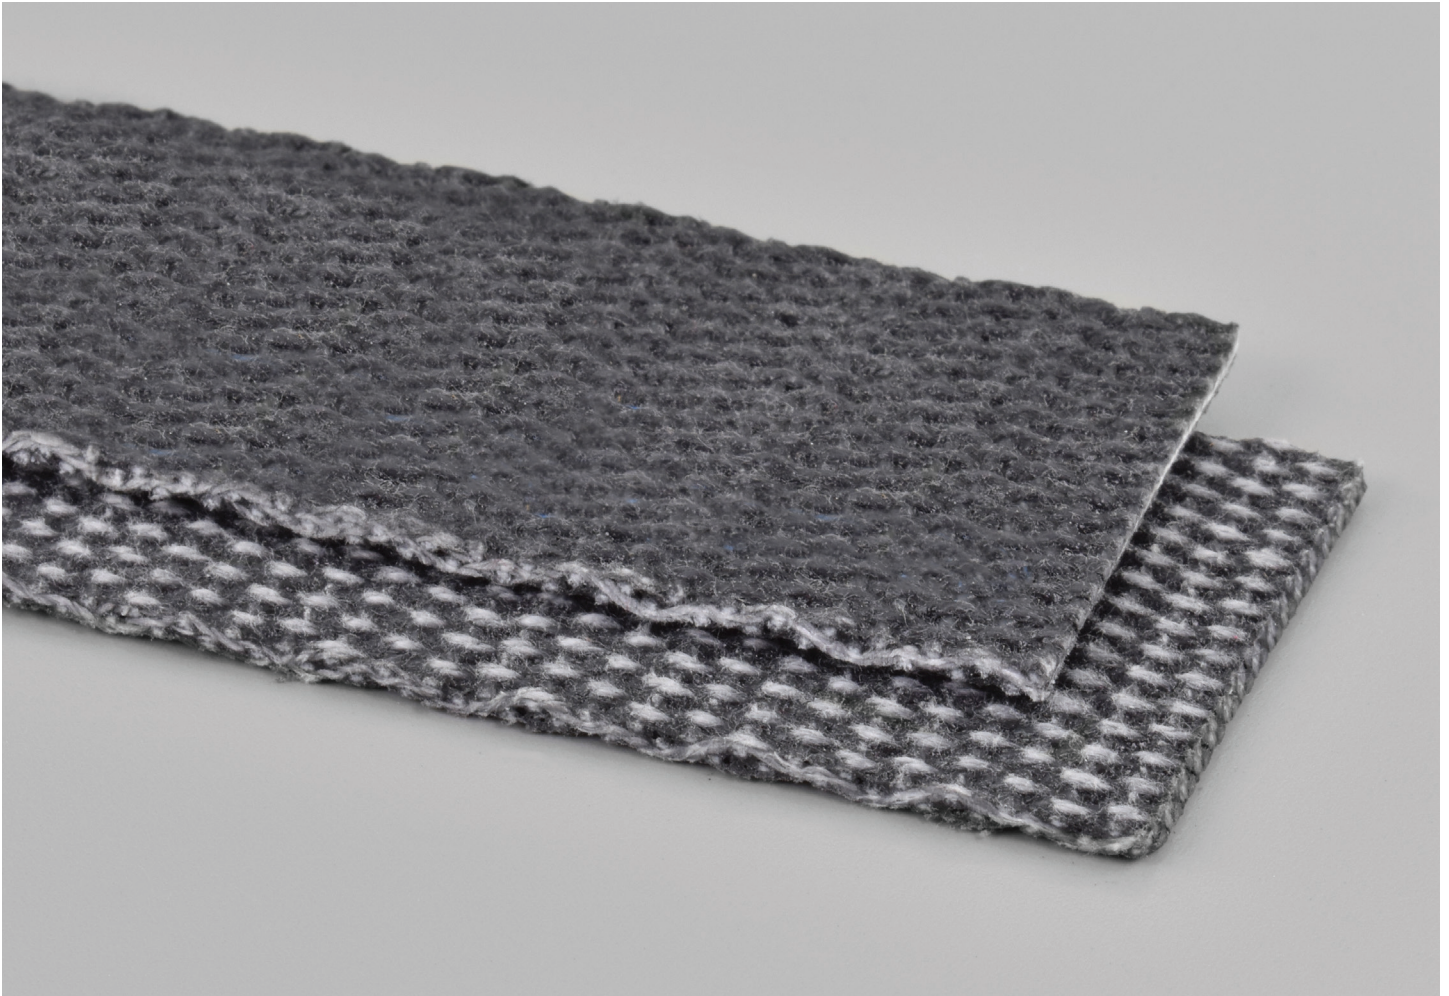

Top Cover View



Bottom Cover View



Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23