

Catalog # **16f**
Item number: **10211**
Description:

Polyveyor/Kevlar 1.5 CFM Rated #5925-C

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 0.00 in

Belt Strength:

Tension Rating (PIW) 60 PIW

Construction:

Compound Top Cover None

Color Yellow/White

Top Cover Thickness (in) (0.00 mm) 0.00 in

Top Cover Description Calendared

Compound Bottom Cover None

Bottom Cover Thickness (in) (0.00 mm) 0.00 in

Bottom Cover Description Calendared

Number of Plies 1

Overall Gauge (in) (7.94 mm) 5/16 in

Unit Weight- lb/PIW 0.0600 lbs/PIW

Carcass Type Polyester-Kevlar

Compound None

Temperature Range (°F)- High 500 °F

Temperature Range (°F)- Low -60 °F

Splice Instructions:

Splice Step No

Splice Finger No

Other:

Static Conducting No

Cross Rigid No

High Heat Yes

Impression Top No

Oil Resistant No

Fire Resistant No

FDA Approved No

Suggested Fasteners:

Flexco Plate/Rivet N/A

Flexco Hinged N/A

Alligator Staple N/A

Clipper Lace N/A

Alligator Lace N/A

Special Characteristics:

For use in air gravity conveyors where temperatures exceed the maximum allowable with polyester fabrics. An economical alternative to ceramic or stainless steel media up to 500 degrees F (600 degrees F intermittent)

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266


AIR PERMEABLE FABRIC
POLYVEYOR/KEVLAR #5925

16f

Catalog Number

10211

Part Number

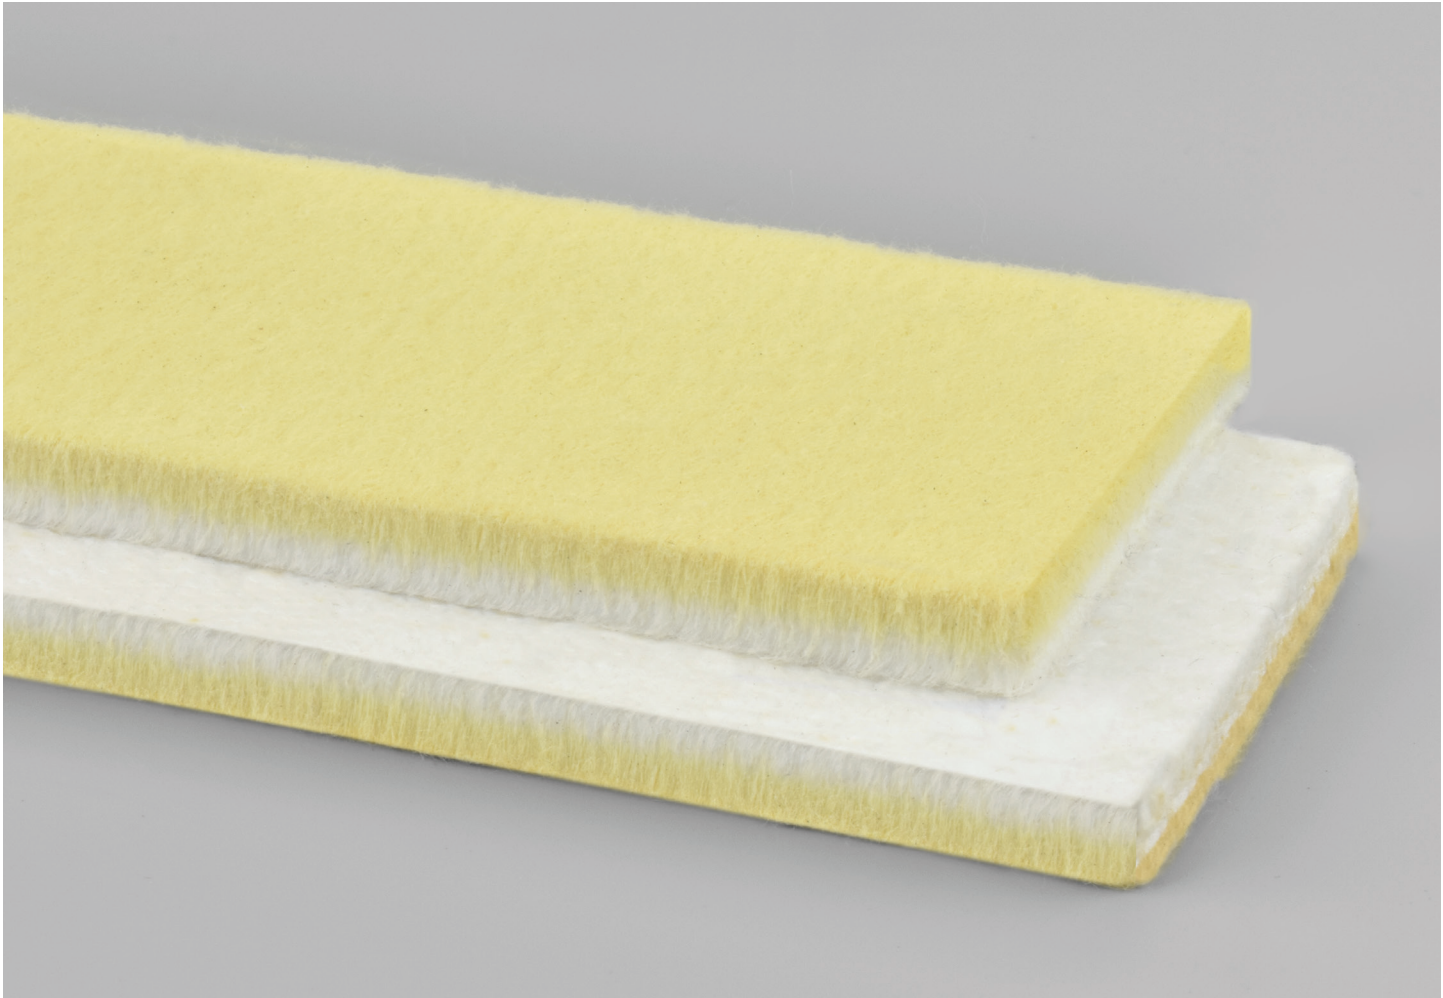

Top Cover View



Bottom Cover View



Ply View