

Catalog # **202LG**
Item number: **32841**
Description:


ZL Red Natural Rubber Longitudinal Groove x FS

International Designation:

Red Natural Rubber LR x FS

Construction:

Compound Top Cover	Red NR
Top Cover Thickness (in)	(3.00 mm) 0.1180 in
Top Cover Description	Longitudinally Grooved
Top Cover Shore	40
Compound Bottom Cover	Black NR
Bottom Cover Thickness (in)	(0.00 mm) 0.0000 in
Bottom Cover Description	Friction Surface
Bottom Cover Shore	N/A
Number of Plies	1
Anti Static	No
Overall Gauge (in)	(4.19 mm) 0.1650 in
Unit Weight- lb/PIW	0.0758 lbs/PIW
Material Between Plies	Spiral Polyester
Maximum Width (in)	72 in
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	0 °F

Pulley Diameter, Minimum


A) Normal Flex (76.20 mm) 3.0000 in

B) Back Flex (152.40 mm) 6.0000 in

Belt Strength:

Pull for 1% Elongation (26 N/mm) 150 lbs/sq in

Splice Instructions:

Foil	No
Splice Process	n/a
Press Temperature (°F)	0 °F
Press Pressure (psi)	0 lbs/sq in

Note: Listed above is a guideline only. Every vulcanizer is different and will show different results. We recommend that you do a test splice with your press before attempting the actual belt splice.

Other:

Cross Rigid	Yes
Impression Top	Yes
Oil Resistant	No
Fire Resistant	No
FDA Approved	No

Special Characteristics:

ZipLink is a breakthrough in belting design that combines time tested rubber cover materials with a structured spiral mesh that can be easily spliced at any length into a continuous belt without the need for special tools. ZipLink's construction eliminates points of weakness because there is no loss of strength at the splice area. The recommended working tension of all ZipLink belts is 150lbs/in with very little stretch to the polyester mesh. This belt is stocked at 72" wide and can easily ship within 3 working days.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO 800-727-2358 314-344-8500	Boise, ID 800-423-4469 208-342-4681	Charlotte, NC 800-849-2358 704-949-2100	Grand Prairie, TX 800-727-2358 314-344-8555	Philadelphia, PA 800-777-1314 215-295-1900	Sacramento, CA 800-289-2358 916-419-7191	Vancouver, WA 800-234-2358 360-567-4280	Beltservice Canada 877-210-7423 905-565-9217	Beltservice de Mexico +52 55 53620434 +44 2980 3266
--	--	--	--	---	---	--	---	--

INDUSTRIAL & FOOD GRADE BELTING


ZL RED NATURAL RUBBER LONGITUDINAL GROOVE X FS

202LG

Catalog Number

32841


Part Number

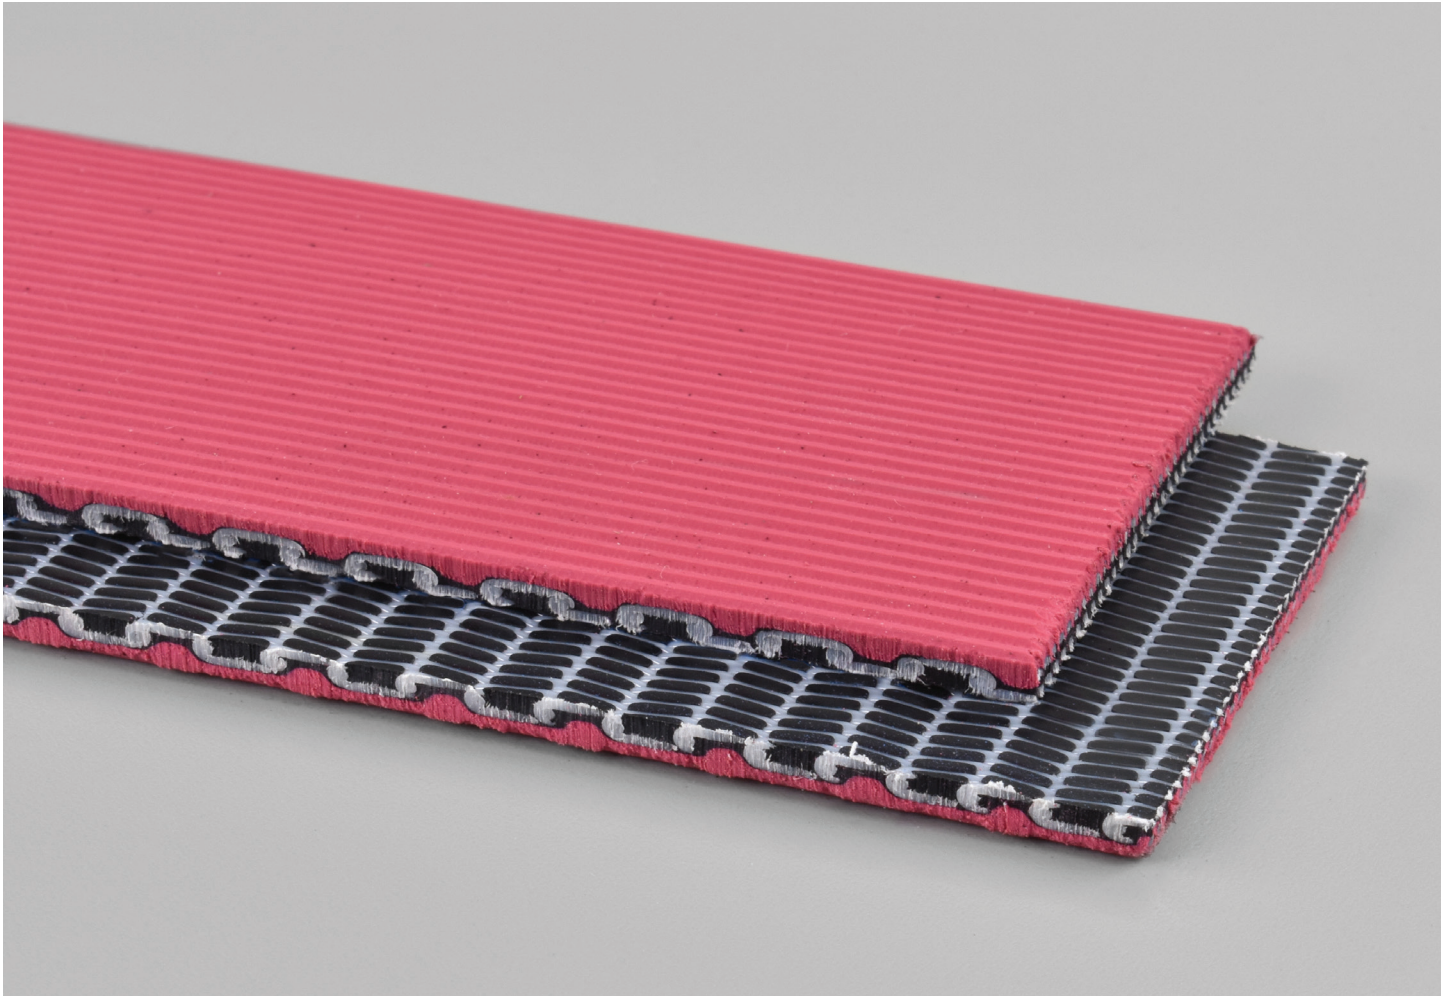

Top Cover View



Bottom Cover View

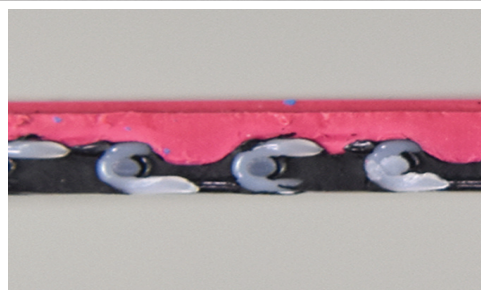

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23