

Catalog # **134SG**
Item number: **10796**
Description:


2 Ply Poly 65 Black PVC Sand Grit AS FR

International Designation:

EM12/2 0/V7 Black Sand Grit AS FR

Construction:

Compound Top Cover	Black PVC
Top Cover Thickness (in)	(0.70 mm) 0.0276 in
Top Cover Description	Grit
Top Cover Shore	70
Compound Bottom Cover	Polyester
Bottom Cover Thickness (in)	(0.00 mm) 0.0000 in
Bottom Cover Description	Bare
Bottom Cover Shore	N/A
Number of Plies	2
Anti Static	Yes
Overall Gauge (in)	(2.90 mm) 0.1142 in
Unit Weight- lb/PIW	0.0614 lbs/PIW
Material Between Plies	PVC
Maximum Width (in)	84 in
Temperature Range (°F)- High	180 °F
Temperature Range (°F)- Low	20 °F

Pulley Diameter, Minimum


A) Normal Flex	(44.45 mm) 1.7500 in
B) Back Flex	(88.90 mm) 3.5000 in

Belt Strength:

Pull for 1% Elongation	(11 N/mm) 65 lbs/sq in
------------------------	------------------------

Splice Instructions:

Foil	Yes
Splice Process	Finger
Press Temperature (°F)	330 °F
Press Pressure (psi)	25 lbs/sq in

Note: Listed above is a guideline only. Every vulcanizer is different and will show different results. We recommend that you do a test splice with your press before attempting the actual belt splice.

Other:

Cross Rigid	No
Impression Top	Yes
Oil Resistant	No
Fire Resistant	Yes
FDA Approved	No

Special Characteristics:

This 2 ply multifilament belt is most commonly used for power turn applications. The 134SG demonstrates good rip, tear, elongation, and fastener holding capability. The combination of the sand grit impression and the ultra modified cover compound results in a long lasting gripping top cover that is designed for a various packaging handling applications. Having a low friction, static conductive bottom fabric is ideal for slider-bed applications.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO 800-727-2358 314-344-8500	Boise, ID 800-423-4469 208-342-4681	Charlotte, NC 800-849-2358 704-949-2100	Grand Prairie, TX 800-727-2358 314-344-8555	Philadelphia, PA 800-777-1314 215-295-1900	Sacramento, CA 800-289-2358 916-419-7191	Vancouver, WA 800-234-2358 360-567-4280	Beltservice Canada 877-210-7423 905-565-9217	Beltservice de Mexico +52 55 53620434 +44 2980 3266
--	--	--	--	---	---	--	---	--

POWER TURN REPLACEMENT BELTS

2 PLY POLY 65 BLACK PVC SAND GRIT AS FR



INTERNATIONAL DESIGNATION: EM12/2 0/V7 BLACK SAND GRIT AS FR

134SG


Catalog Number

10796


Part Number

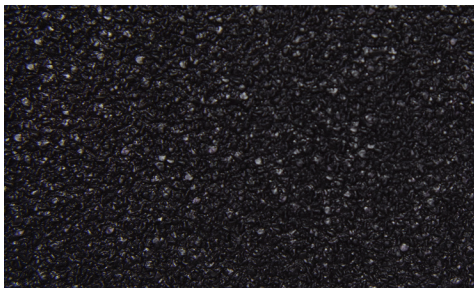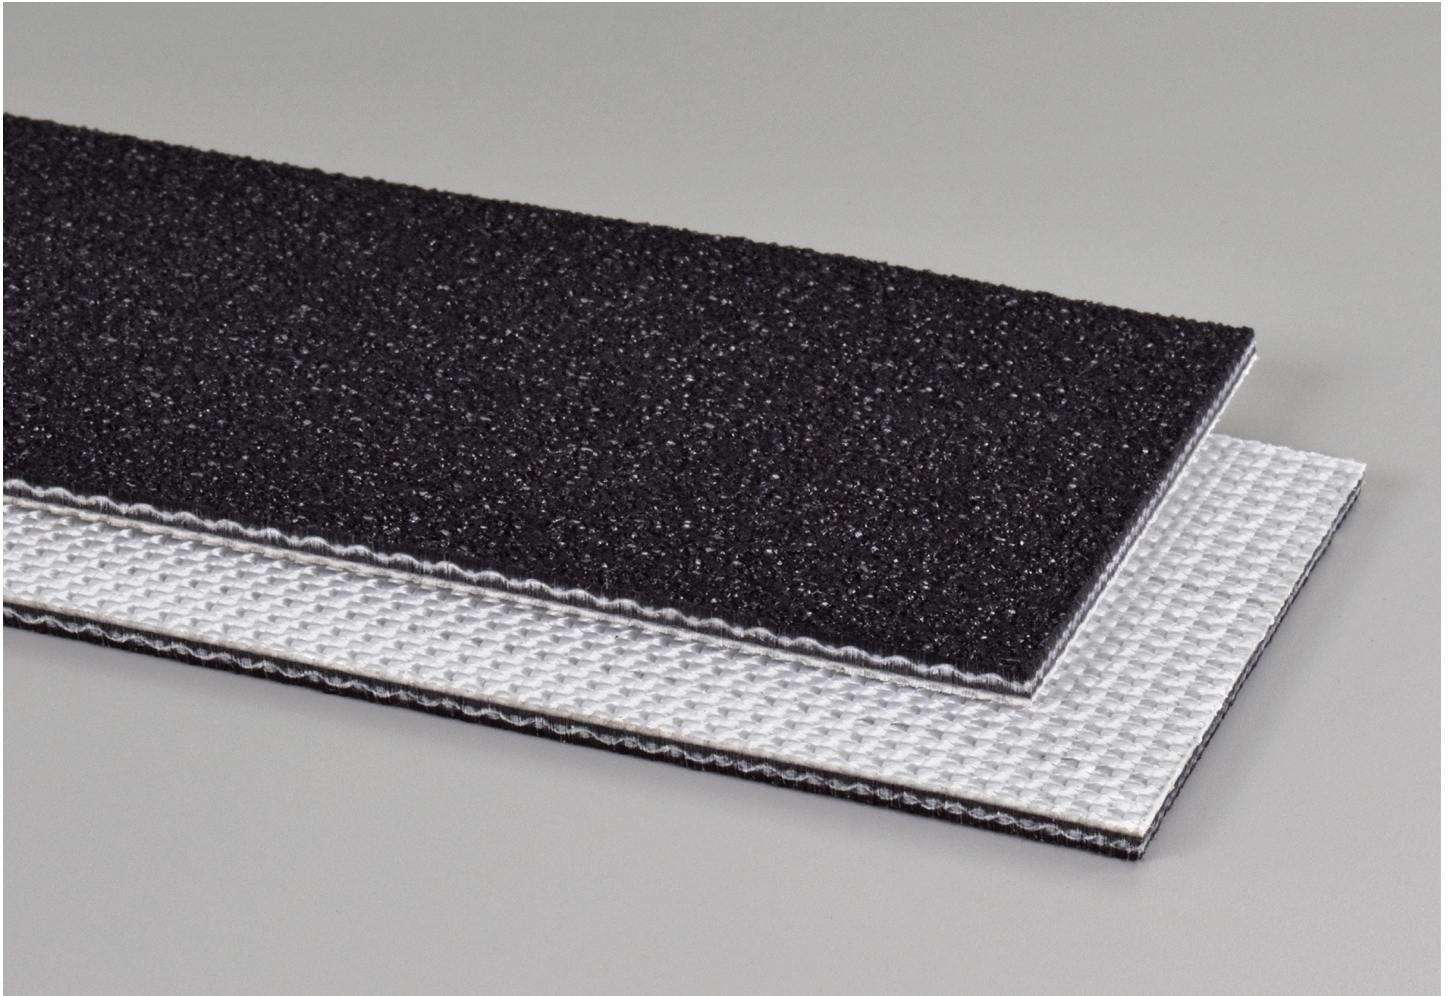

Top Cover View

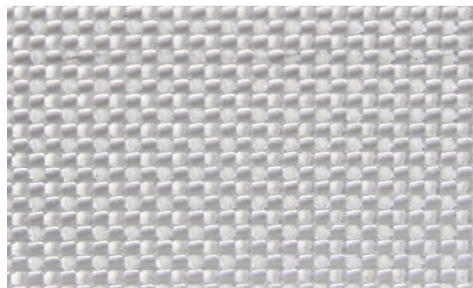

Bottom Cover View

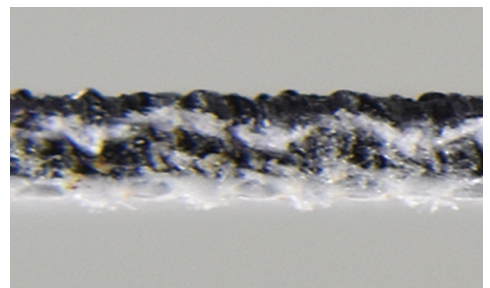

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23