

Catalog # **25**
Item number: **10706**
Description:
 5 Ply Brown Nitrile FBS
International Designation:
 N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 1.50 in

Belt Strength:

Tension Rating (PIW) 60 PIW

Construction:

Compound Top Cover	Cotton-Polyester
Color	Brown
Top Cover Thickness (in)	(0.00 mm) 0.00 in
Top Cover Description	Friction Surface
Compound Bottom Cover	Cotton-Polyester
Bottom Cover Thickness (in)	(0.00 mm) 0.00 in
Bottom Cover Description	Friction Surface
Number of Plies	5
Overall Gauge (in)	(2.78 mm) 7/64 in
Unit Weight- lb/PIW	0.0620 in
Carcass Type	Cotton-Polyester
Compound	Brown Nitrile
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	0 °F

Splice Instructions:

Splice Step	Yes
Splice Finger	No

Other:

Static Conducting	No
Cross Rigid	No
High Heat	No
Impression Top	No
Oil Resistant	Yes
Fire Resistant	No
FDA Approved	No

Suggested Fasteners:

Flexco Plate/Rivet	N/A
Flexco Hinged	N/A
Alligator Staple	N/A
Clipper Lace	#1A
Alligator Lace	#7

Special Characteristics:

Features a tightly woven blend of cotton and polyester plies impregnated with nitrile, producing a belt suitable for light and medium-weight conveying for a multitude of applications. Particularly popular for oily conditions, especially the conveying of metal parts, also as carrying tapes for folding machines. Economical. Very flexible.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

LIGHT DUTY



5 PLY BROWN NITRILE FBS

25


Catalog Number

10706


Part Number

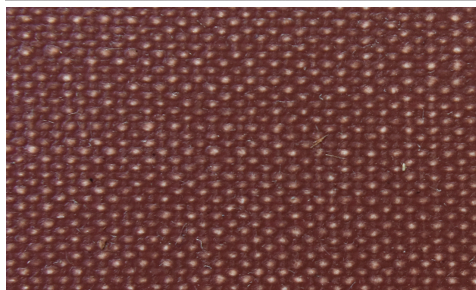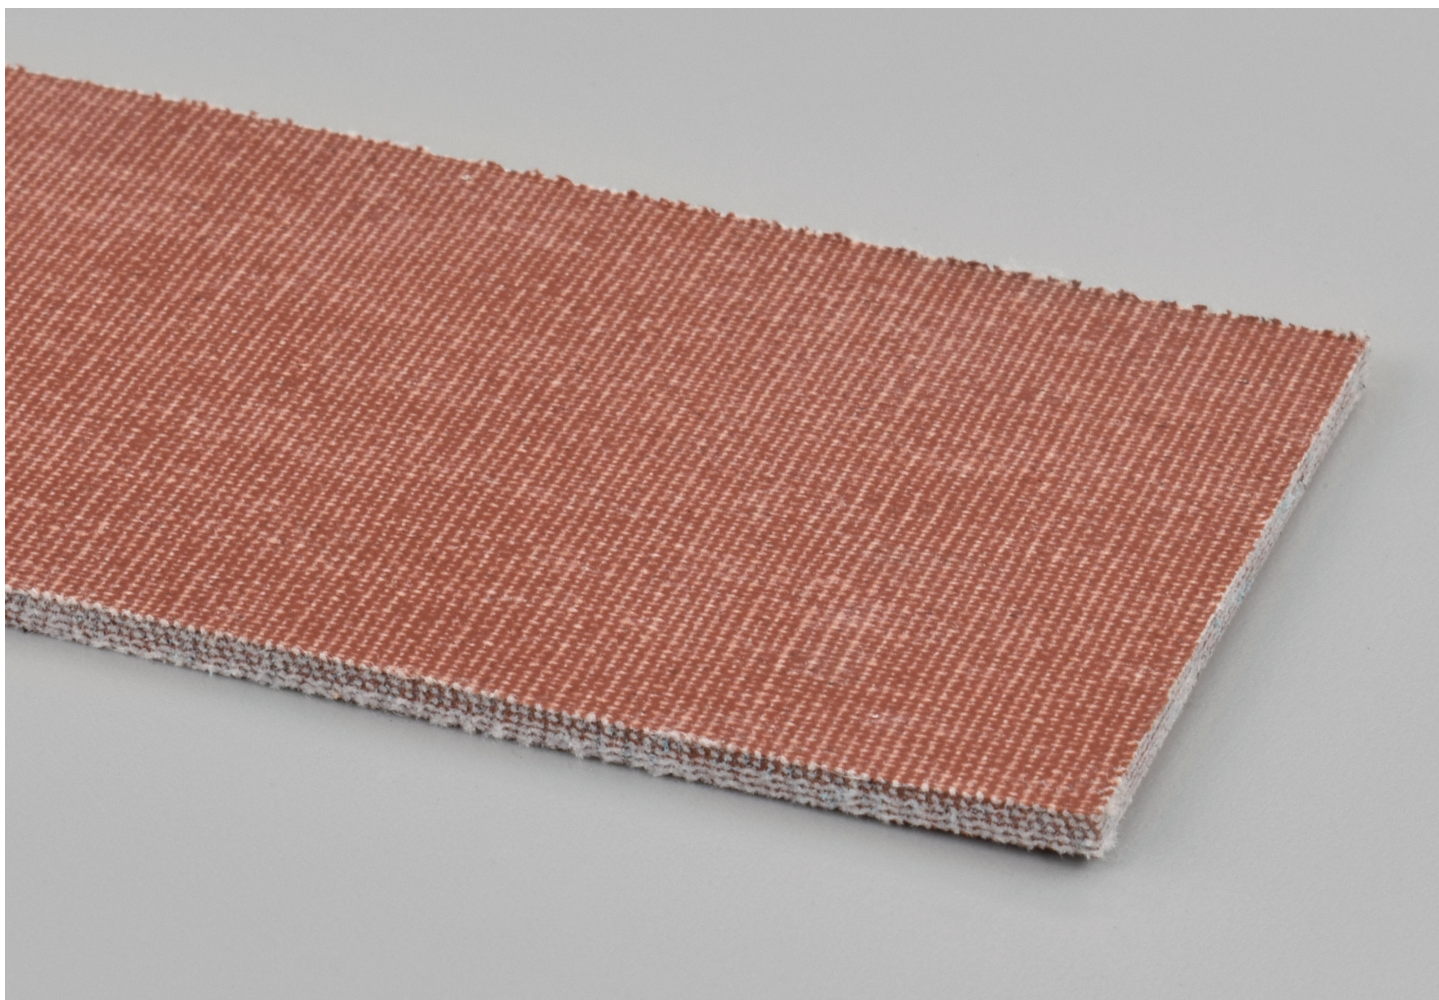

Top Cover View

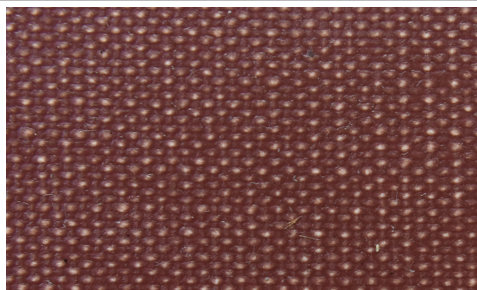

Bottom Cover View

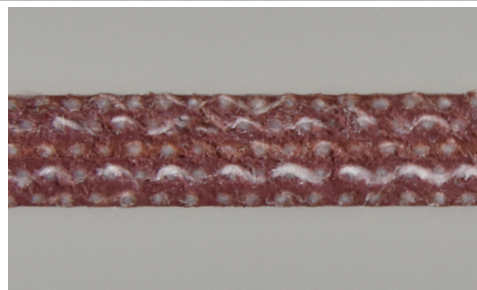

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23