

Catalog # **27a**
Item number: **10702**
Description:

4 Ply Poly 180 Blk Neoprene FBS-SC

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 2.00 in

Belt Strength:

Tension Rating (PIW) 180 PIW

Construction:

Compound Top Cover Polyester

Color Black

Top Cover Thickness (in) (0.00 mm) 0.00 in

Top Cover Description Friction Surface

Compound Bottom Cover Polyester

Bottom Cover Thickness (in) (0.00 mm) 0.00 in

Bottom Cover Description Friction Surface

Number of Plies 4

Overall Gauge (in) (2.78 mm) 7/64 in

Unit Weight- lb/PIW 0.0560 lbs/PIW

Carcass Type Polyester

Compound Black Neoprene

Temperature Range (°F)- High 250 °F

Temperature Range (°F)- Low -20 °F

Splice Instructions:

Splice Step Yes

Splice Finger No

Other:

Static Conducting Yes

Cross Rigid No

High Heat No

Impression Top No

Oil Resistant Yes

Fire Resistant No

FDA Approved No

Suggested Fasteners:

Flexco Plate/Rivet N/A

Flexco Hinged N/A

Alligator Staple N/A

Clipper Lace #1

Alligator Lace #7

Special Characteristics:

Static conductive properties allow this belt to be used in electronic parts conveying and for other products sensitive to static discharge.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

LIGHT DUTY


4 PLY POLY 180 PIW BLACK NEOPRENE FBS-SC

27a

Catalog Number

10702


Part Number

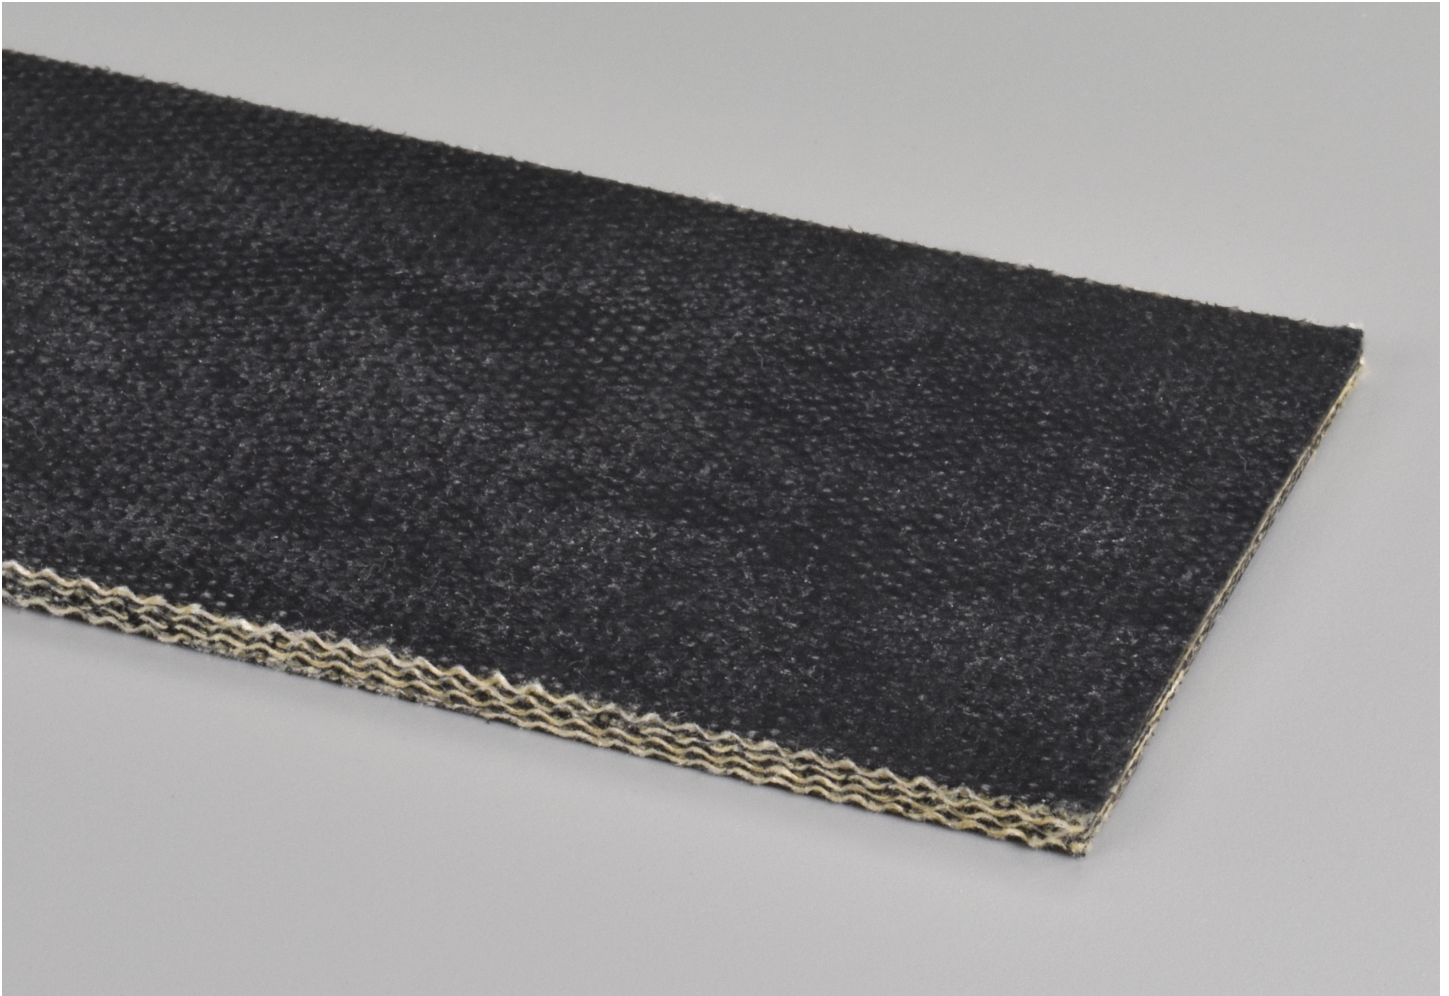

Top Cover View



Bottom Cover View

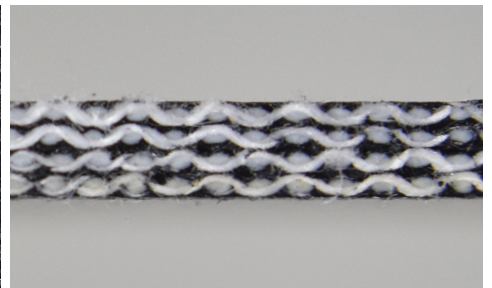

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23