

Catalog # **45**
Item number: **10894**
Description:
 8 Ply 35oz Tan FS x FS Silver Hard Duck
International Designation:
 N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 16.00 in

Belt Strength:

Tension Rating (PIW) 280 PIW

Construction:

Compound Top Cover	Tan SBR
Color	Tan
Top Cover Thickness (in)	(0.00 mm) 0.00 in
Top Cover Description	Friction Surface
Compound Bottom Cover	Tan SBR
Bottom Cover Thickness (in)	(0.00 mm) 0.00 in
Bottom Cover Description	Friction Surface
Number of Plies	8
Overall Gauge (in)	(12.70 mm) 1/2 in
Unit Weight- lb/PIW	0.2130 lbs/PIW
Carcass Type	35oz Silver Hard Duck
Compound	Tan SBR
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	-40 °F

Splice Instructions:

Splice Step	Yes
Splice Finger	No

Other:

Static Conducting	No
Cross Rigid	No
High Heat	No
Impression Top	No
Oil Resistant	No
Fire Resistant	No
FDA Approved	No

Suggested Fasteners:

Flexco Plate/Rivet	R5
Flexco Hinged	#550
Alligator Staple	N/A
Clipper Lace	N/A
Alligator Lace	N/A

Special Characteristics:

Constructed of rugged silver hard duck fabric plies with heavy skim coats between and friction surface both sides. This belt is formulated for severe conditions and rugged service. Excellent fastener-holding ability. Can be spliced endless or with a mechanical fastener.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

TRANSMISSION



8 PLY 35 OZ. TAN FS X FS SILVER HARD DUCK

45


Catalog Number

10894


Part Number

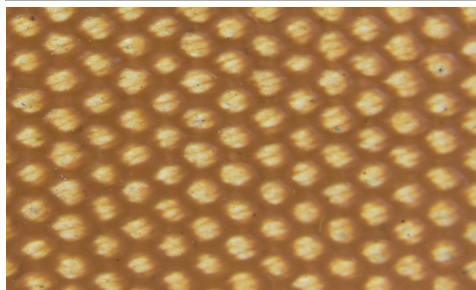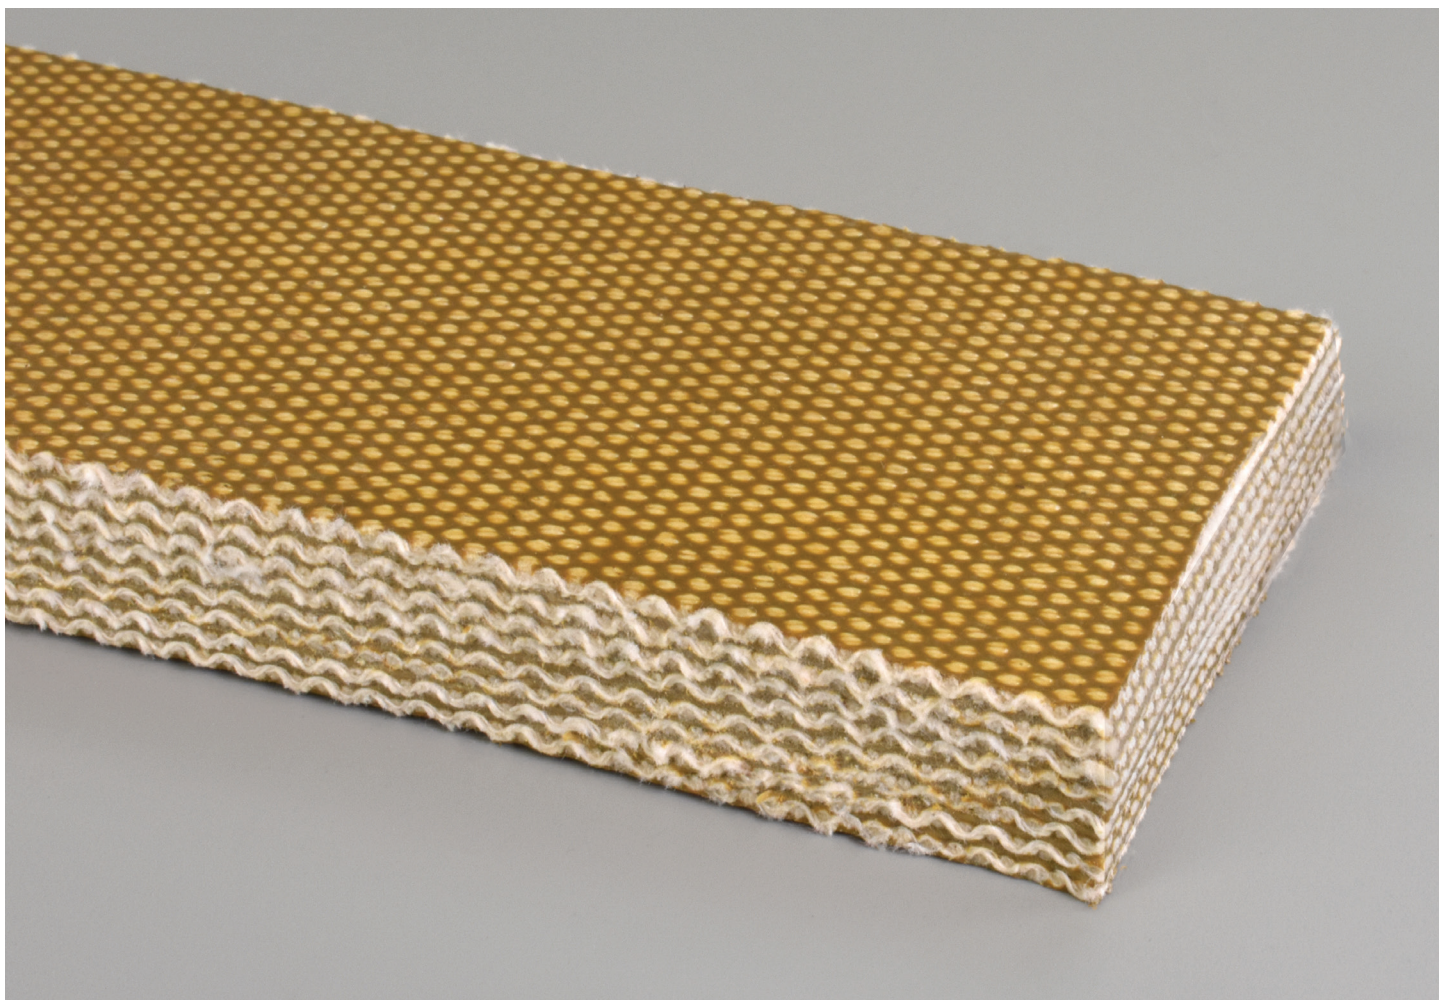

Top Cover View

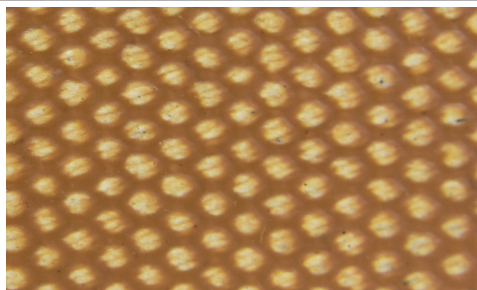

Bottom Cover View

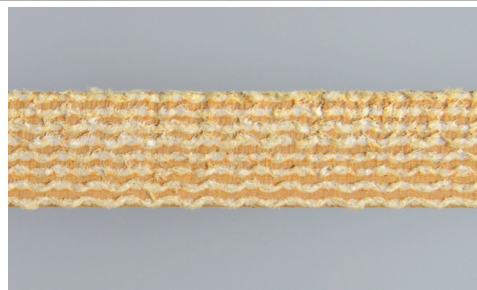

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23