

Catalog # **47**
Item number: **10590**
Description:
 4 Ply Hot Stock and Water
International Designation:
 N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 3.00 in

Belt Strength:

Tension Rating (PIW) 120 PIW

Construction:

Compound Top Cover	White Bare Duck
Color	White
Top Cover Thickness (in)	(0.00 mm) 0.00 in
Top Cover Description	White Bare Duck
Compound Bottom Cover	Black SBR
Bottom Cover Thickness (in)	(0.00 mm) 0.00 in
Bottom Cover Description	Friction Surface
Number of Plies	4
Overall Gauge (in)	(4.76 mm) 3/16 in
Unit Weight- lb/PIW	0.0880 lbs/PIW
Carcass Type	Cotton-Polyester
Compound	Black SBR
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	-40 °F

Splice Instructions:

Splice Step	Yes
Splice Finger	No

Other:

Static Conducting	No
Cross Rigid	No
High Heat	No
Impression Top	No
Oil Resistant	No
Fire Resistant	No
FDA Approved	No

Suggested Fasteners:

Flexco Plate/Rivet	N/A
Flexco Hinged	N/A
Alligator Staple	#125
Clipper Lace	#3
Alligator Lace	#25

Special Characteristics:

Bare duck surface down for lowest possible friction for slider bed use, and up for deflector bar applications; ideal as slip-top belt for "stall" operations. Its true use is for conveying uncured rubber in tire plants.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

HOT STOCK & WATER

4 PLY HOT STOCK & WATER

47


Catalog Number

10590

Part Number



Top Cover View

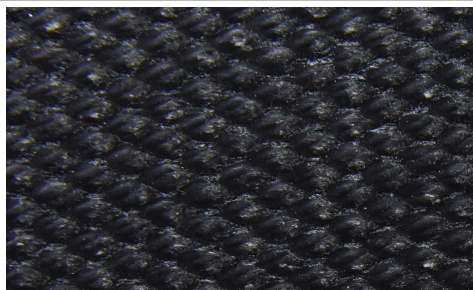

Bottom Cover View



Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23