

Catalog # **53a**
Item number: **10882**
Description:

4 Ply 180 Black 3/32in Smooth Nitrile Top x Bare

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 4.00 in

Belt Strength:

Tension Rating (PIW) 180 PIW

Construction:

Compound Top Cover Black Nitrile

Color Black

Top Cover Thickness (in) (2.29 mm) 5/64 in

Top Cover Description Smooth

Compound Bottom Cover Poly/Nylon

Bottom Cover Thickness (in) (0.00 mm) 0.00 in

Bottom Cover Description Bare

Number of Plies 4

Overall Gauge (in) (6.35 mm) 1/4 in

Unit Weight- lb/PIW 0.1300 lbs/PIW

Carcass Type Polyester

Compound Black Nitrile

Temperature Range (°F)- High 225 °F

Temperature Range (°F)- Low 0 °F

Splice Instructions:

Splice Step Yes

Splice Finger No

Other:

Static Conducting No

Cross Rigid No

High Heat No

Impression Top No

Oil Resistant Yes

Fire Resistant No

FDA Approved No

Suggested Fasteners:

Flexco Plate/Rivet N/A

Flexco Hinged N/A

Alligator Staple #187

Clipper Lace #5

Alligator Lace #25

Special Characteristics:

This is a smooth top belt used for the wood sander and metal finishing industries. Abuse-resistant nitrile top cover makes this belt ideal for oily cut and gouge applications.

*****All Values are nominal and subject to change without notice. *****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

PACKAGE HANDLING


4 PLY 180 PIW BLACK 3/32 SMOOTH NITRILE TOP X BARE

53a

Catalog Number

10882

Part Number

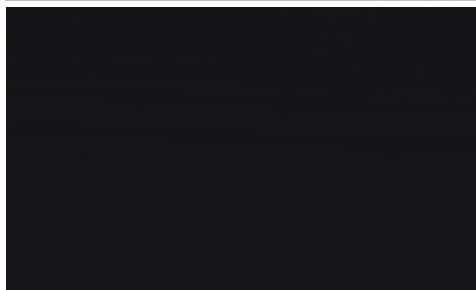

Top Cover View



Bottom Cover View



Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23