

Catalog # **56a**
Item number: **10634**
Description:

3 Ply 225 Black Roughtop x Bare

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 2.50 in

Belt Strength:

Tension Rating (PIW) 225 PIW

Construction:

Compound Top Cover	Black SBR
Color	Black
Top Cover Thickness (in)	(0.00 mm) 0.00 in
Top Cover Description	Roughtop
Compound Bottom Cover	Bare RFL
Bottom Cover Thickness (in)	(0.00 mm) 0.00 in
Bottom Cover Description	Bare
Number of Plies	3
Overall Gauge (in)	(8.33 mm) 21/64 in
Unit Weight- lb/PIW	0.1170 lbs/PIW
Carcass Type	Polyester
Compound	Black SBR
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	-40 °F

Splice Instructions:

Splice Step	Yes
Splice Finger	No

Other:

Static Conducting	No
Cross Rigid	No
High Heat	No
Impression Top	Yes
Oil Resistant	No
Fire Resistant	No
FDA Approved	No

Suggested Fasteners:

Flexco Plate/Rivet	N/A
Flexco Hinged	N/A
Alligator Staple	#187
Clipper Lace	#2
Alligator Lace	#15

Special Characteristics:

The polyester carcass is an excellent choice for high tension systems that require a belt with low-stretch characteristics.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

INCLINE ROUGHTOP

3 PLY 225 PIW BLACK ROUGHTOP X BARE

56a


Catalog Number

10634


Part Number



Top Cover View

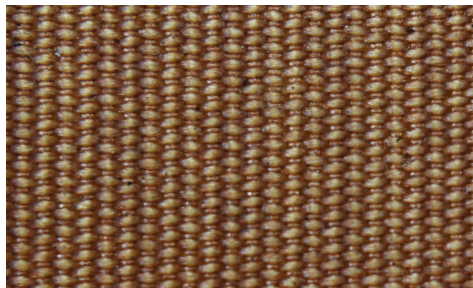

Bottom Cover View

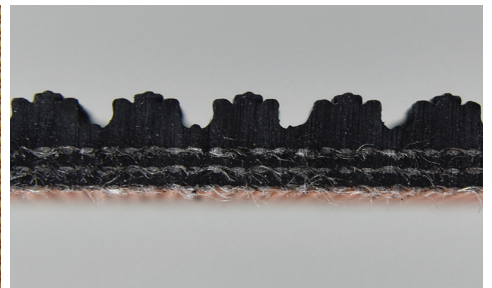

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23