

Catalog # **59c**
Item number: **10678**
Description:

4 Ply 240 Tan Puregum Roughtop x Bare

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 8.00 in

Belt Strength:

Tension Rating (PIW) 240 PIW

Construction:

Compound Top Cover	Tan NR
Color	Tan
Top Cover Thickness (in)	(0.00 mm) 0.00 in
Top Cover Description	Roughtop
Compound Bottom Cover	Tan NR
Bottom Cover Thickness (in)	(0.00 mm) 0.00 in
Bottom Cover Description	Bare
Number of Plies	4
Overall Gauge (in)	(9.13 mm) 23/64 in
Unit Weight- lb/PIW	0.1300 lbs/PIW
Carcass Type	Polyester
Compound	Tan NR
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	-40 °F

Splice Instructions:

Splice Step	Yes
Splice Finger	No

Other:

Static Conducting	No
Cross Rigid	No
High Heat	No
Impression Top	Yes
Oil Resistant	No
Fire Resistant	No
FDA Approved	No

Suggested Fasteners:

Flexco Plate/Rivet	N/A
Flexco Hinged	N/A
Alligator Staple	#187
Clipper Lace	#2
Alligator Lace	#15

Special Characteristics:

The tan color is non-marking. The genuine gum is a soft durometer for the highest grab, steepest inclines and long wear where required. The bare bottom construction is popular for surface finishing machinery applications.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

INCLINE ROUGHTOP


4 PLY 240 PIW TAN PURE GUM ROUGHTOP X BARE

59c

Catalog Number

10678


Part Number

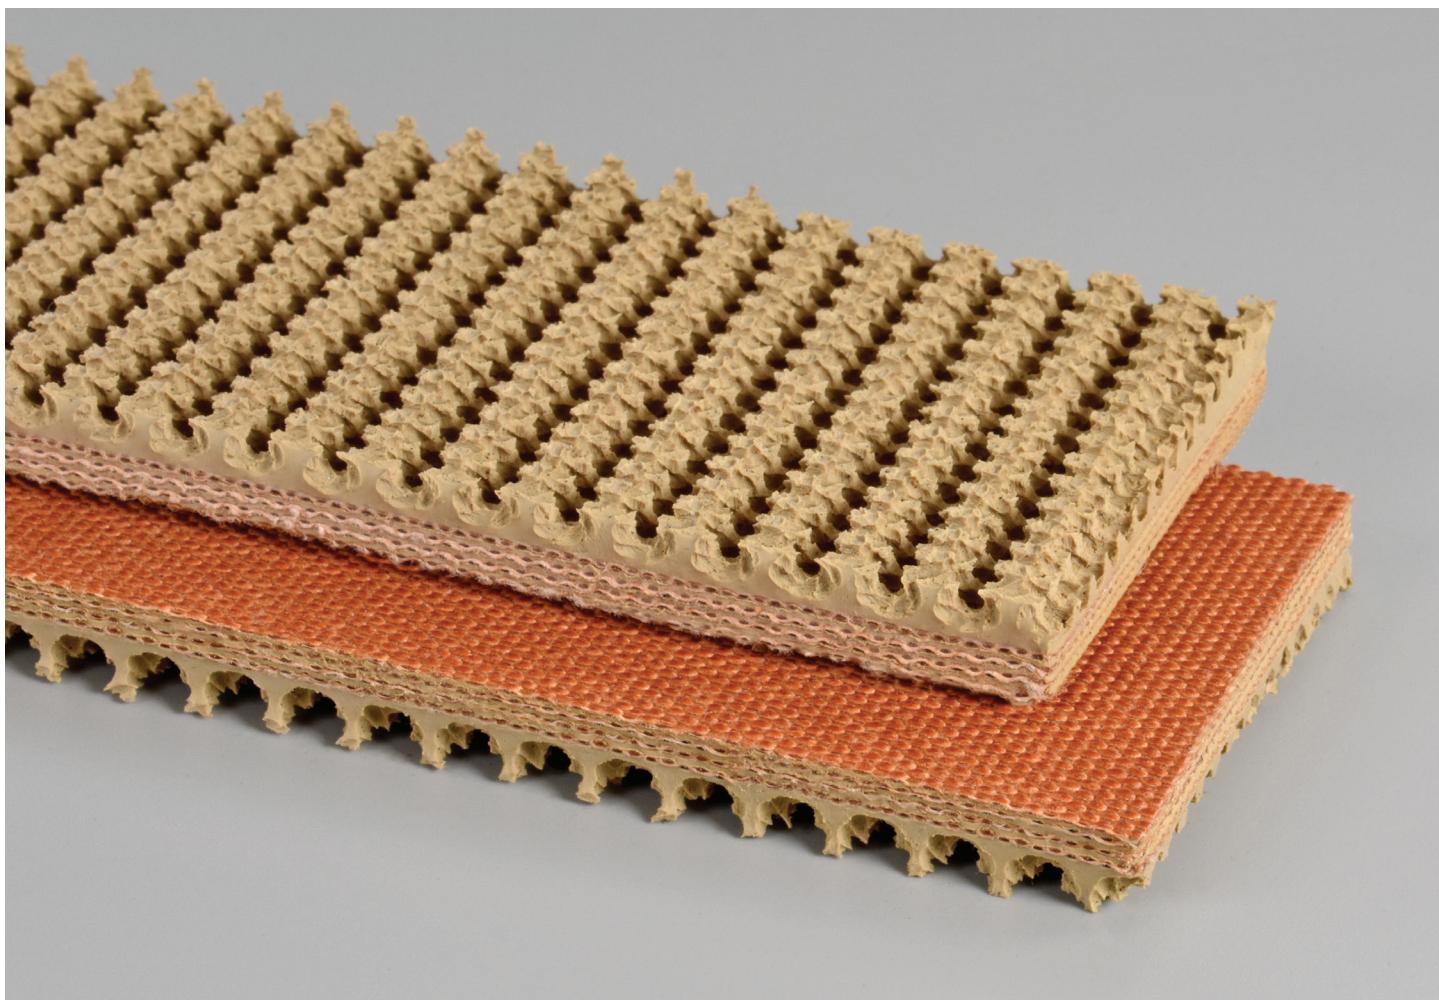

Top Cover View



Bottom Cover View

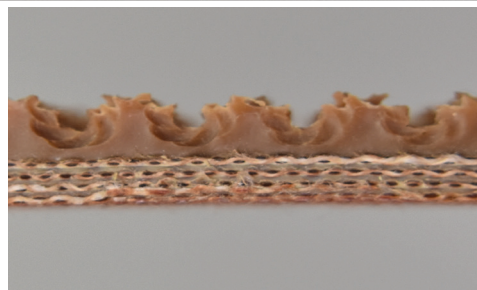

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23