

Catalog # **60c**
Item number: **10630**
Description:

3 Ply 150 Brown Butyl Roughtop x Bare

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 2.50 in

Belt Strength:

Tension Rating (PIW) 150 PIW

Construction:

Compound Top Cover Butyl/EPDM

Color Brown

Top Cover Thickness (in) (3.30 mm) 1/8 in

Top Cover Description Roughtop

Compound Bottom Cover Bare RFL

Bottom Cover Thickness (in) (0.00 mm) 0.00 in

Bottom Cover Description Bare

Number of Plies 3

Overall Gauge (in) (7.62 mm) 19/64 in

Unit Weight- lb/PIW 0.1000 lbs/PIW

Carcass Type Polyester

Compound Butyl/EPDM

Temperature Range (°F)- High 300 °F

Temperature Range (°F)- Low -65 °F

Splice Instructions:

Splice Step Yes

Splice Finger No

Other:

Static Conducting No

Cross Rigid No

High Heat Yes

Impression Top Yes

Oil Resistant No

Fire Resistant No

FDA Approved No

Suggested Fasteners:

Flexco Plate/Rivet N/A

Flexco Hinged N/A

Alligator Staple #125

Clipper Lace #1

Alligator Lace #1

Special Characteristics:

The Butyl properties of this belt provide good resistance to heat, chemicals, abrasion and is an excellent option for shock absorption.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

INCLINE ROUGHTOP


3 PLY 150 PIW BROWN BUTYL ROUGHTOP X BARE

60c


Catalog Number

10630


Part Number

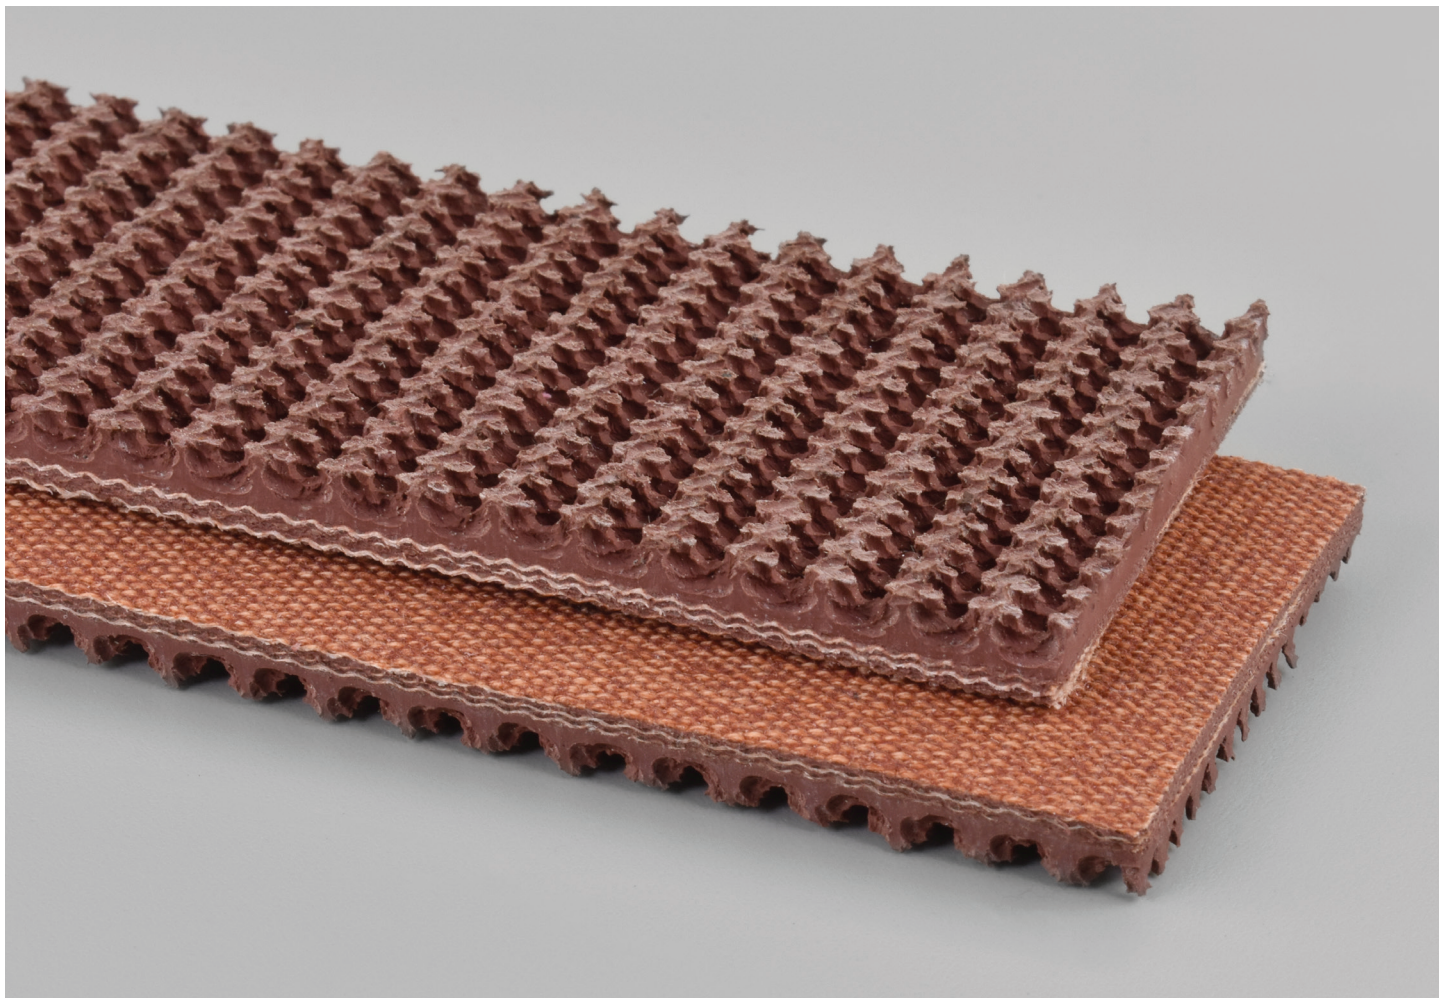

Top Cover View

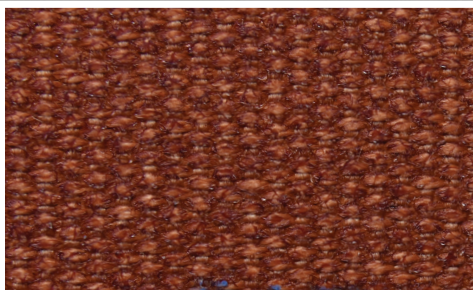

Bottom Cover View

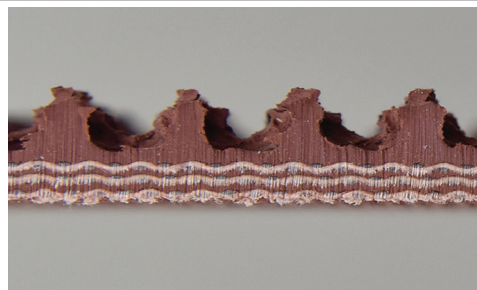

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23