

Catalog # 61
Item number: 10674
Description:

3 Ply 135 Tan Carbox Nit Roughtop x Bare

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 2.00 in

Belt Strength:

Tension Rating (PIW) 135 PIW

Construction:

Compound Top Cover	Tan Carbox Nitrile
Color	Tan
Top Cover Thickness (in)	(0.00 mm) 0.00 in
Top Cover Description	Roughtop
Compound Bottom Cover	Bare RFL
Bottom Cover Thickness (in)	(0.00 mm) 0.00 in
Bottom Cover Description	Bare
Number of Plies	3
Overall Gauge (in)	(7.11 mm) 17/64 in
Unit Weight- lb/PIW	0.1000 lbs/PIW
Carcass Type	Polyester
Compound	Tan Carbox Nitrile
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	0 °F

Splice Instructions:

Splice Step	Yes
Splice Finger	No

Other:

Static Conducting	No
Cross Rigid	No
High Heat	No
Impression Top	Yes
Oil Resistant	Yes
Fire Resistant	No
FDA Approved	No

Suggested Fasteners:

Flexco Plate/Rivet	N/A
Flexco Hinged	N/A
Alligator Staple	#125
Clipper Lace	#1
Alligator Lace	#1

Special Characteristics:

Carbox nitrile roughtop yields vastly longer service life than rubber roughtop. It is ideal where regular roughtop surfaces wear down quickly and must be replaced. This belt is popular for handling cardboard cartons.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

INCLINE ROUGHTOP



3 PLY 135 TAN CARBOX NITRILE R.T. X BARE

61

Catalog Number

10674

Part Number

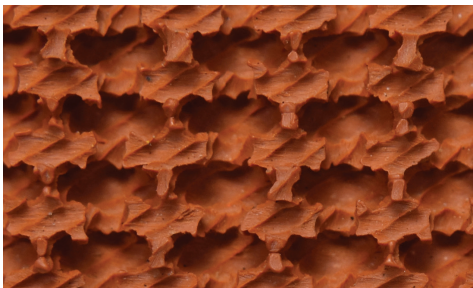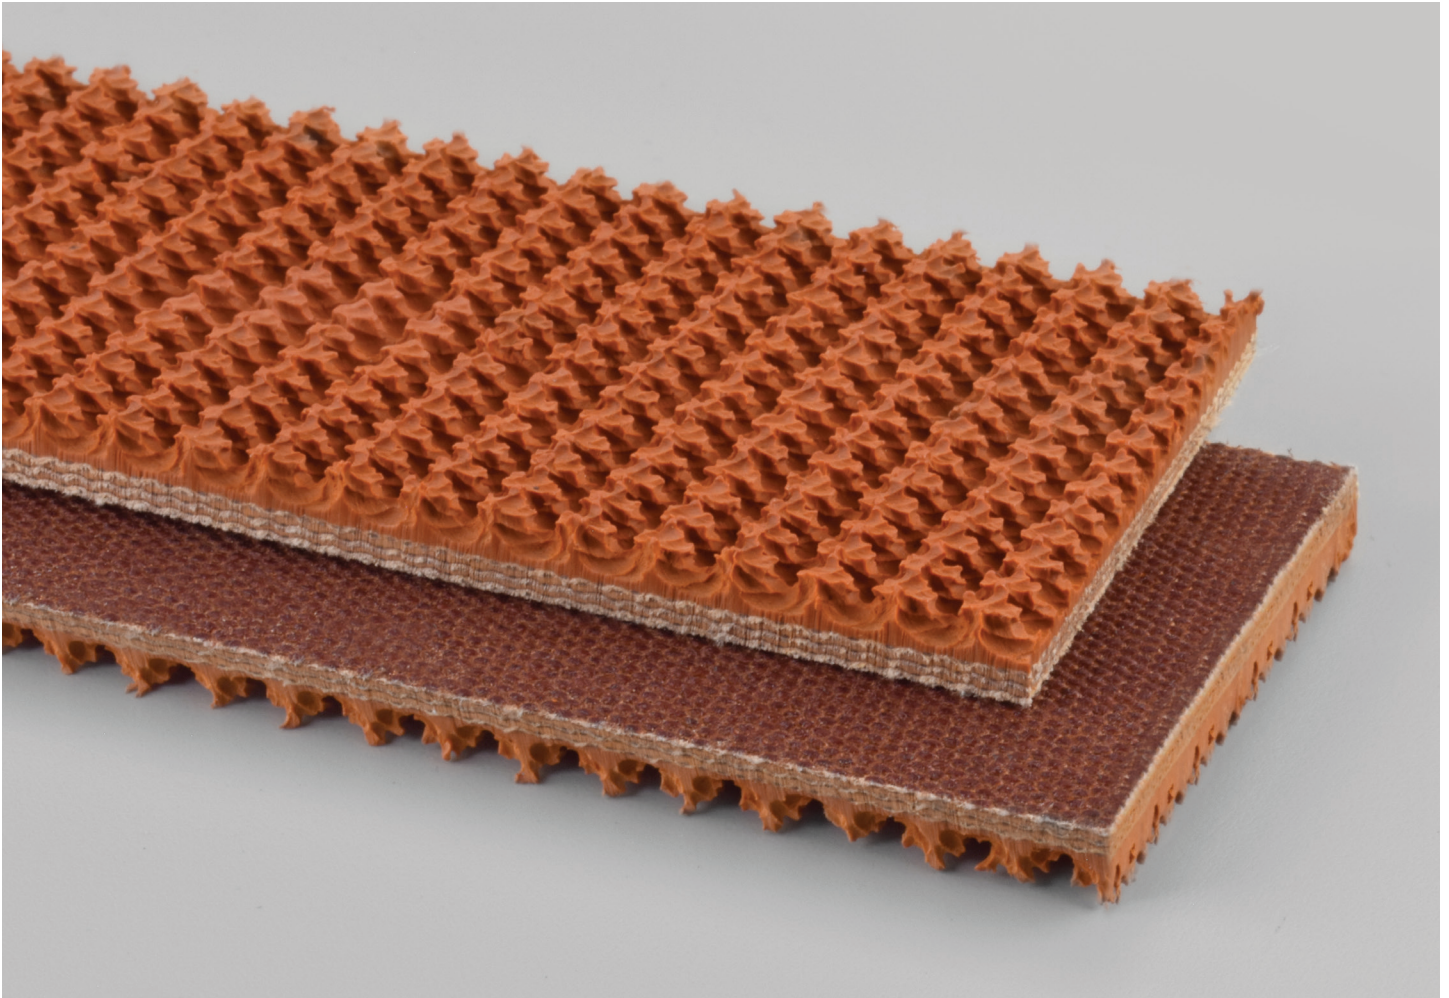

Top Cover View



Bottom Cover View



Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23