

Catalog # **61a**
Item number: **10662**
Description:

3 Ply 150 Blue Carbox Nitrile Roughtop x Bare

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 2.50 in

Belt Strength:

Tension Rating (PIW) 150 PIW

Construction:

Compound Top Cover	Blue Carbox Nitrile
Color	Blue
Top Cover Thickness (in)	(0.00 mm) 0.00 in
Top Cover Description	Roughtop
Compound Bottom Cover	Bare RFL
Bottom Cover Thickness (in)	(0.00 mm) 0.00 in
Bottom Cover Description	Bare
Number of Plies	3
Overall Gauge (in)	(7.14 mm) 9/32 in
Unit Weight- lb/PIW	0.1130 lbs/PIW
Carcass Type	Polyester
Compound	Blue Carbox Nitrile
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	0 °F

Splice Instructions:

Splice Step	Yes
Splice Finger	No

Other:

Static Conducting	No
Cross Rigid	No
High Heat	No
Impression Top	Yes
Oil Resistant	Yes
Fire Resistant	No
FDA Approved	No

Suggested Fasteners:

Flexco Plate/Rivet	N/A
Flexco Hinged	N/A
Alligator Staple	#125
Clipper Lace	#2
Alligator Lace	#15

Special Characteristics:

Carbox nitrile roughtop yields vastly longer service life than rubber roughtop. It is ideal where regular roughtop surfaces wear down quickly and must be replaced. This belt is popular for handling cardboard cartons.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

INCLINE ROUGHTOP



3 PLY 150 PIW BLUE CARBOX NITRILE R.T. X BARE

61a


Catalog Number

10662


Part Number

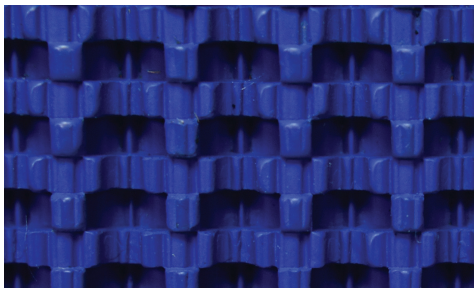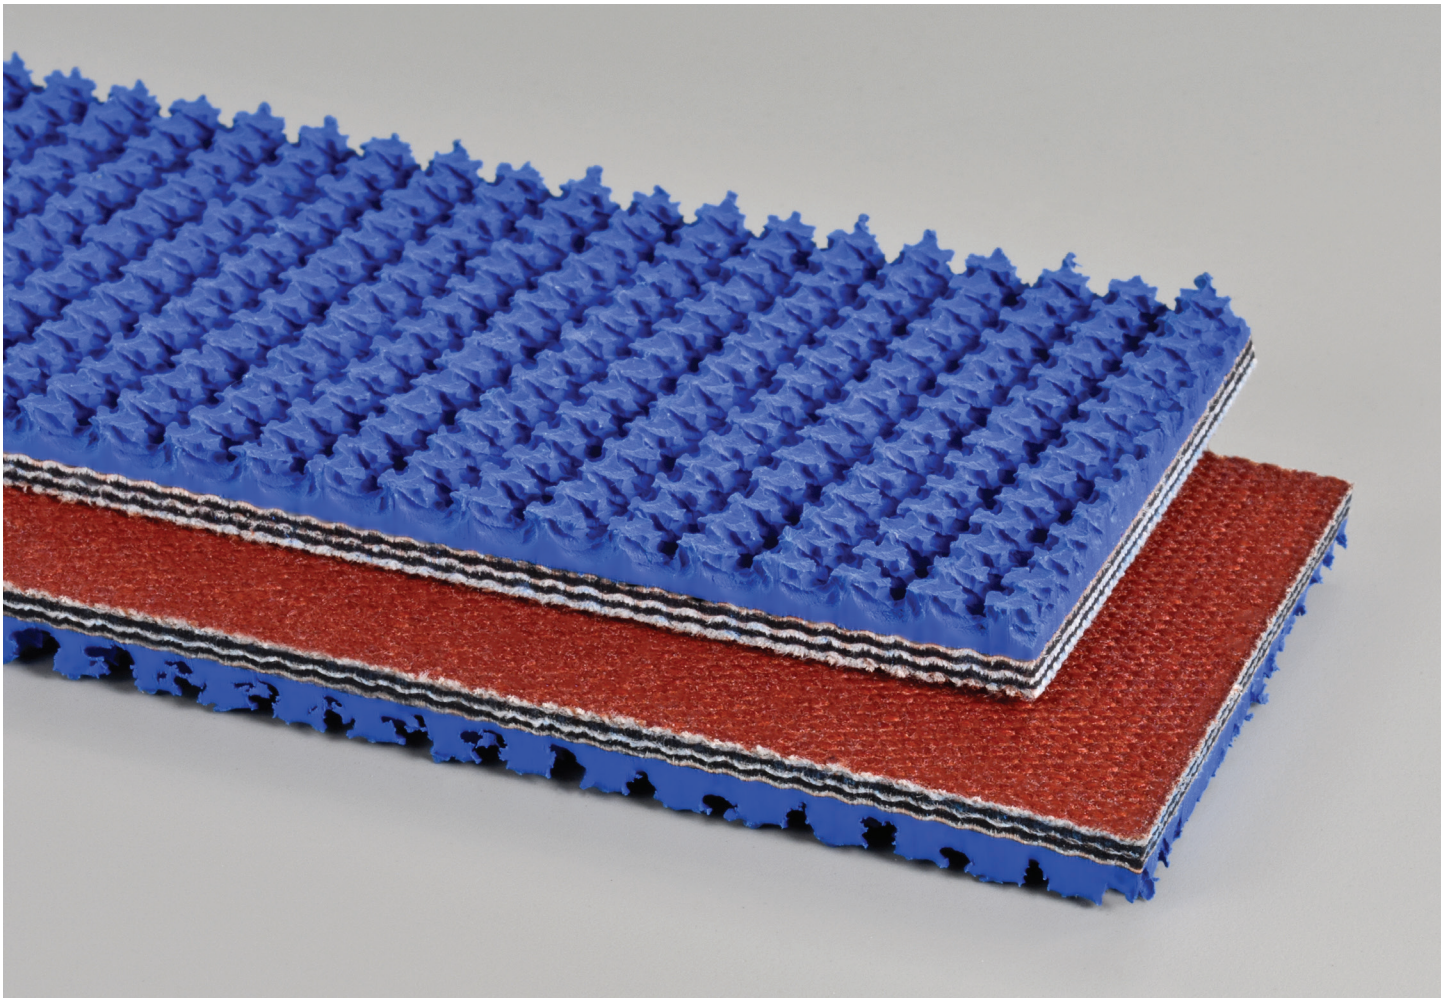

Top Cover View

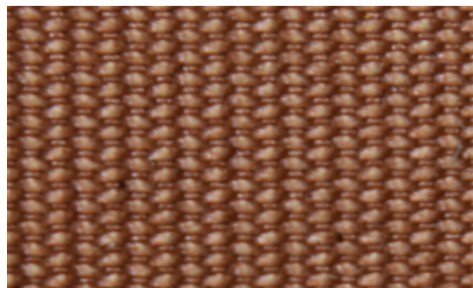

Bottom Cover View

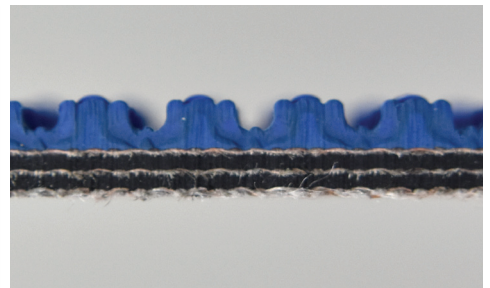

Ply View