

Catalog # **61c**
Item number: **27998**
Description:

3 Ply 225 Blue Carbox Nitrile RT x BB

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 8.00 in

Belt Strength:

Tension Rating (PIW) 225 PIW

Construction:

Compound Top Cover	Blue Nitrile
Color	Blue
Top Cover Thickness (in)	(3.30 mm) 1/8 in
Top Cover Description	Roughtop
Compound Bottom Cover	Bare RFL
Bottom Cover Thickness (in)	(0.00 mm) 0.00 in
Bottom Cover Description	Bare
Number of Plies	3
Overall Gauge (in)	(7.54 mm) 19/64 in
Unit Weight- lb/PIW	0.1150 lbs/PIW
Carcass Type	Polyester
Compound	Blue Nitrile
Temperature Range (°F)- High	250 °F
Temperature Range (°F)- Low	0 °F

Splice Instructions:

Splice Step	Yes
Splice Finger	No

Other:

Static Conducting	No
Cross Rigid	No
High Heat	No
Impression Top	Yes
Oil Resistant	Yes
Fire Resistant	No
FDA Approved	No

Suggested Fasteners:

Flexco Plate/Rivet	N/A
Flexco Hinged	N/A
Alligator Staple	#125
Clipper Lace	#2
Alligator Lace	#15

Special Characteristics:

Carbox nitrile roughtop yields vastly longer service life than rubber roughtop. Is ideal where regular roughtop surfaces wear down quickly and must be replaced. Popular for handling cardboard cartons.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexic
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

INCLINE ROUGHTOP



3 PLY 225 PIW BLUE CARBOX NITRILE R.T. X BARE

61c


Catalog Number

27998


Part Number

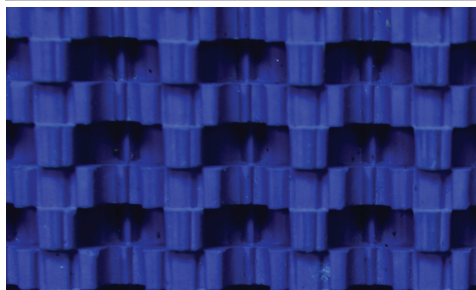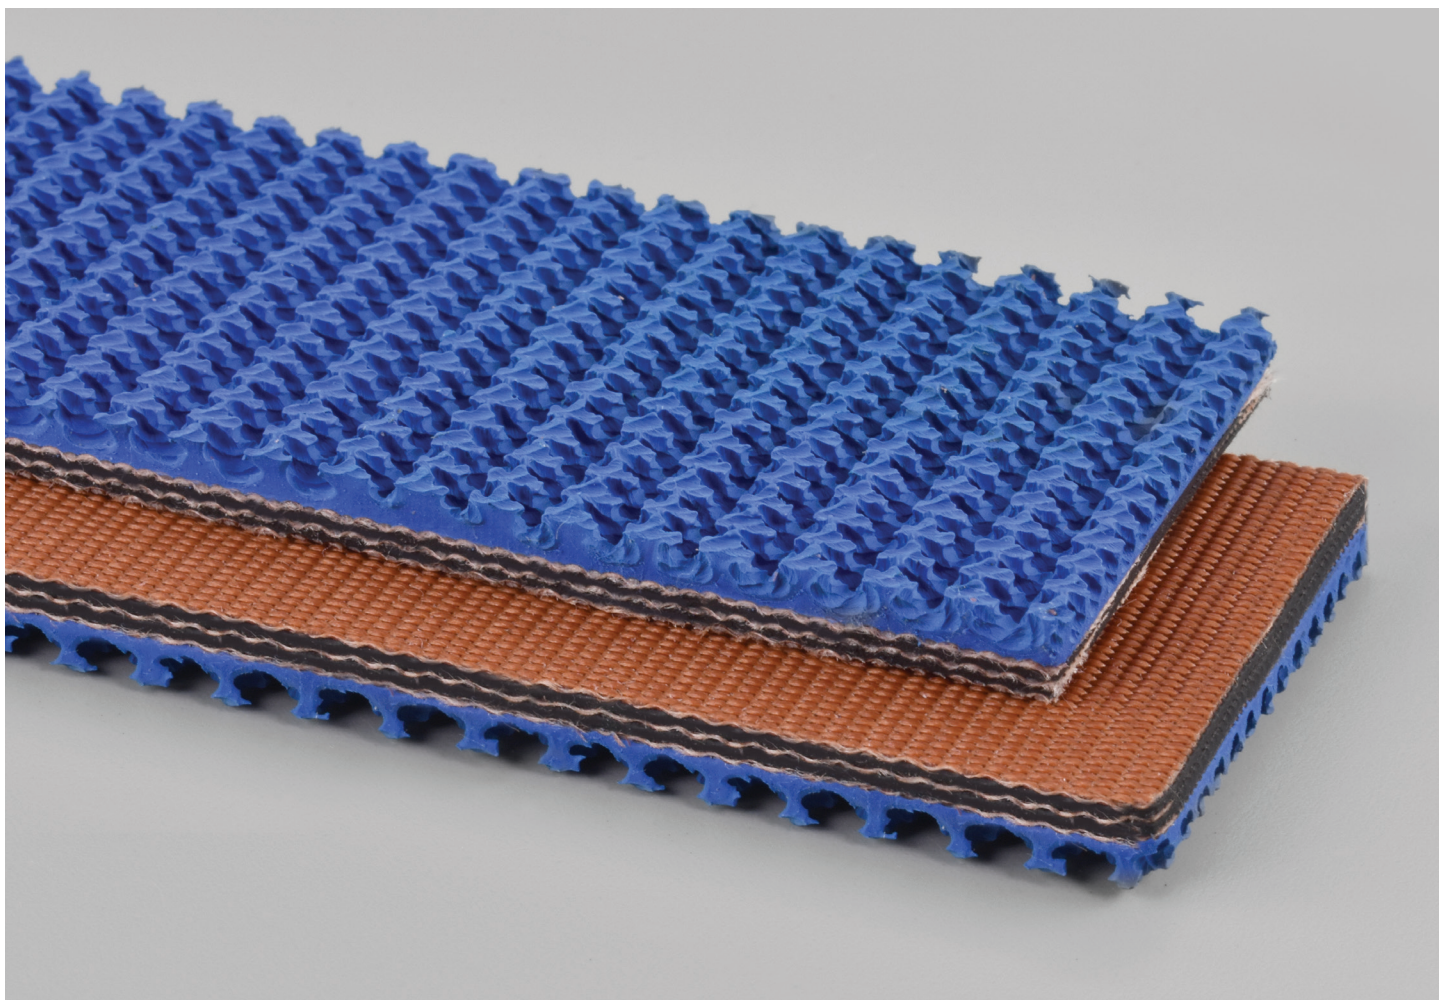

Top Cover View

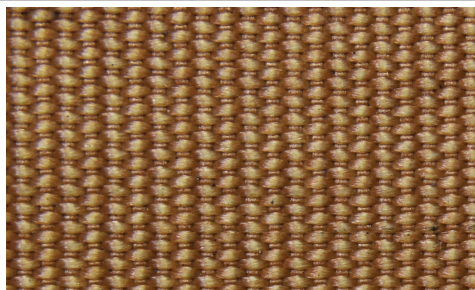

Bottom Cover View

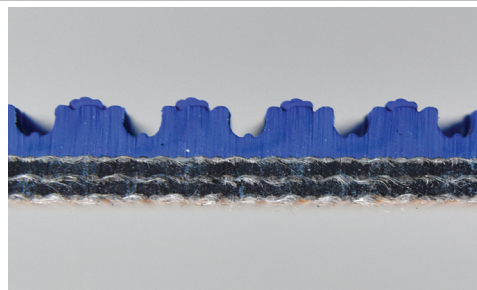

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23