


**Catalog #**                      **260**
**Item number:**                **42775**
**Description:**

PCCDB MT 98A 3.5mm

**International Designation:**

N/A

**Pulley Diameter, Minimum**


A) Normal Flex                                      (80.01 mm) 3.1500 in

B) Back Flex                                        (100.08 mm) 3.9400 in

**Construction:**

Compound Top Cover                                      Thermoplastic Polyurethane

Top Cover Description                                      Matte

Top Cover Shore                                              98 Shore A

Compound Bottom Cover                                      Thermoplastic Polyurethane

Bottom Cover Description                                      N/A

Bottom Cover Shore                                              98 Shore A

Number of Plies                                                      n/a

Anti Static                                                              No

Overall Gauge (in)                                              (3.48 mm) 0.1370 in

Unit Weight- lb/PIW                                              0.0775 lbs/PIW

Maximum Width (in)                                              60 in

Temperature Range (°F)- High                                      160 °F

Temperature Range (°F)- Low                                      15 °F

**Belt Strength:**

Pull for 1% Elongation                                      (7 N/mm) 39 PIW

**Splice Instructions:**

Splice Process                                                              Butt Weld

Note: Listed above is a guideline only. Every vulcanizer is different and will show different results. We recommend that you do a test splice with your press before attempting the actual belt splice.

**Other:**

Oil Resistant                                                              Yes

Fire Resistant                                                              No

FDA Approved                                                              Yes

**Special Characteristics:**

Proclean Center Drive is compliant with NSF standard NSF/ANSI/3-A 14159-3-14 Hygiene Requirement for the design of mechanical belt conveyors for the use in meat and poultry processing. Designed for use in all food and washdown environments. Maximum belt speed is 200 fpm.

\*\*\*\*\*All Values are nominal and subject to change without notice.\*\*\*\*\*

<b>St. Louis, MO</b>	<b>Boise, ID</b>	<b>Charlotte, NC</b>	<b>Grand Prairie, TX</b>	<b>Philadelphia, PA</b>	<b>Sacramento, CA</b>	<b>Vancouver, WA</b>	<b>Beltservice Canada</b>	<b>Beltservice de Mexico</b>
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

# PROCLEAN POSITIVE DRIVE


PCCDB 98A CENTER DRIVE

**260**

Catalog Number

**42775**

Part Number

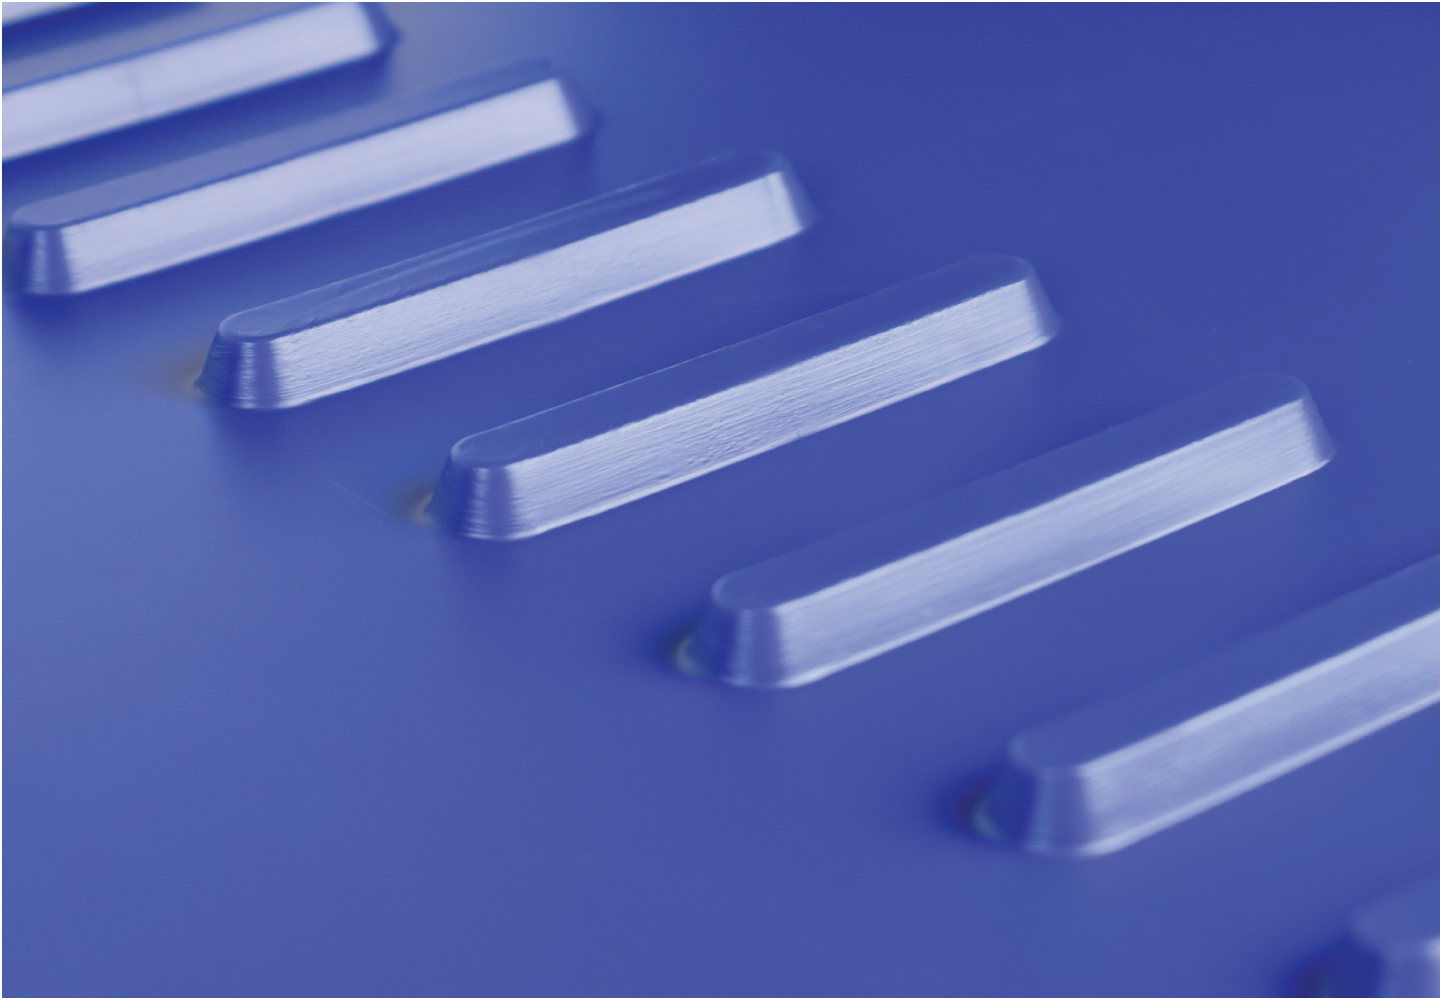

Top Cover View



Bottom Cover View



Ply View



**BELTSERVICE**  
CORPORATION

[beltservice.com](http://beltservice.com)

REV 3/23