


Catalog # **240**
Item number: **42732**
Description:

PCFBB MTxMT 98A 3.5mm

International Designation:

N/A

Pulley Diameter, Minimum


A) Normal Flex (0.00 mm) 0.0000 in

B) Back Flex (0.00 mm) 0.0000 in

Construction:

Compound Top Cover N/A

Top Cover Description N/A

Top Cover Shore N/A

Compound Bottom Cover N/A

Bottom Cover Description N/A

Bottom Cover Shore N/A

Number of Plies N/A

Anti Static No

Overall Gauge (in) (0.00 mm) 0.0000 in

Unit Weight- lb/PIW 0.0000 lbs/PIW

Maximum Width (in) 0 in

Temperature Range (°F)- High 0 °F

Temperature Range (°F)- Low 0 °F

Belt Strength:

Pull for 1% Elongation (0 N/mm) 0 PIW

Splice Instructions:

Splice Process N/A

Note: Listed above is a guideline only. Every vulcanizer is different and will show different results. We recommend that you do a test splice with your press before attempting the actual belt splice.

Other:

Oil Resistant No

Fire Resistant No

FDA Approved No

Special Characteristics:

N/A

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

PROCLEAN FLAT



PCFBB 98A

240

Catalog Number

42732


Part Number

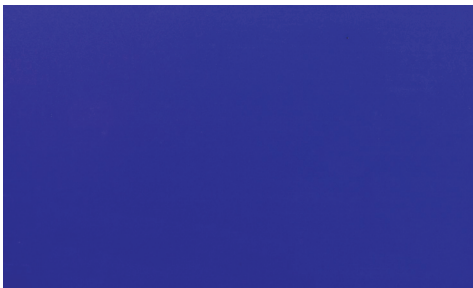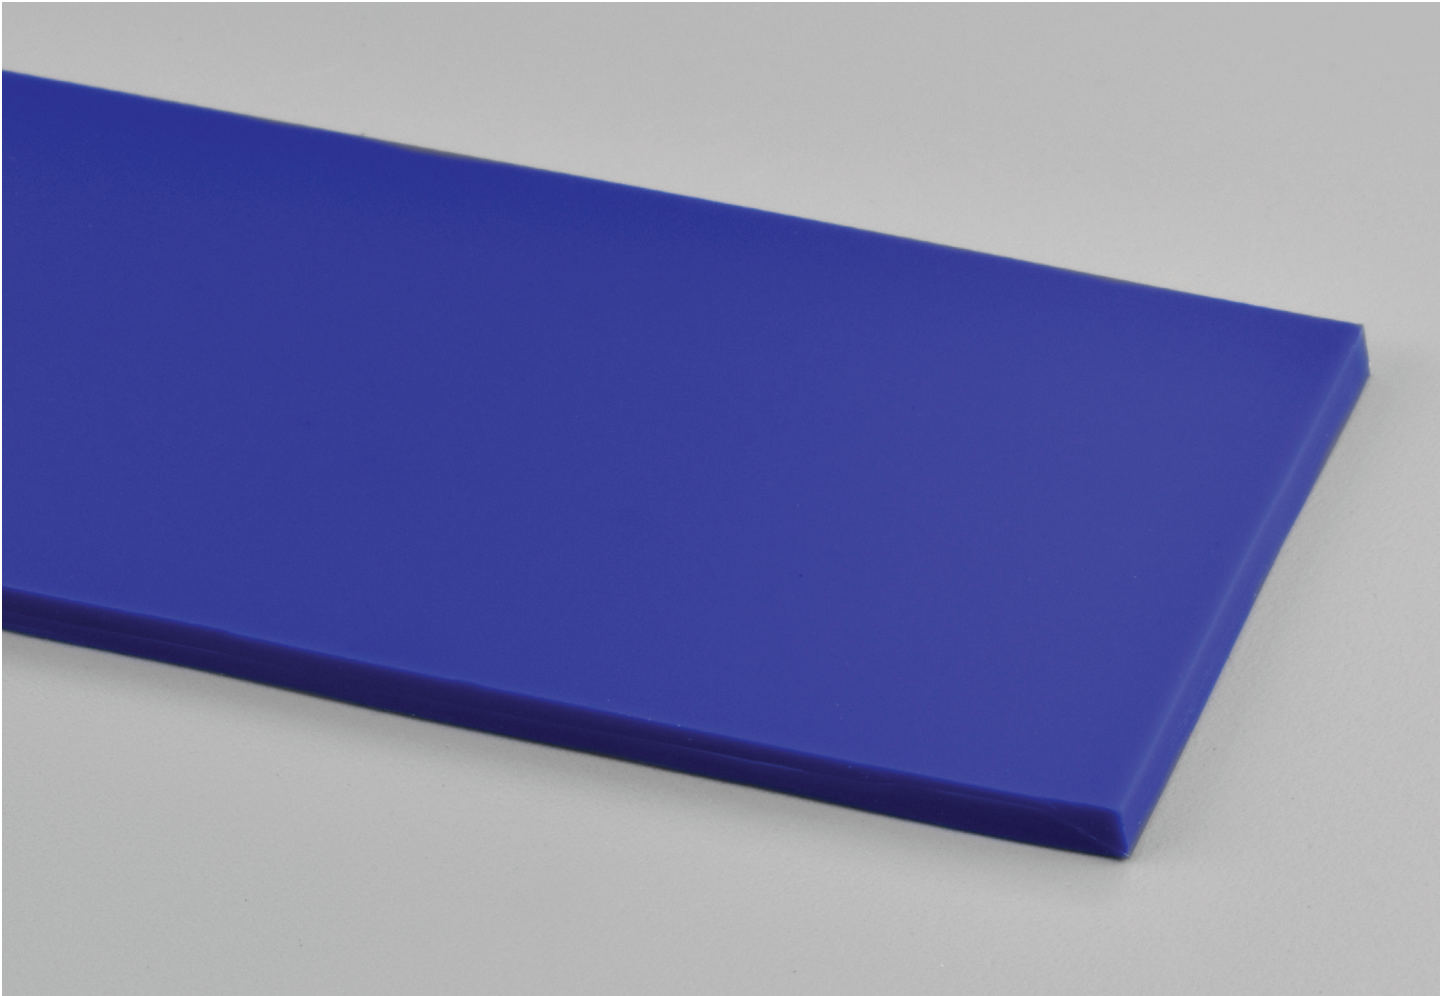

Top Cover View



Bottom Cover View

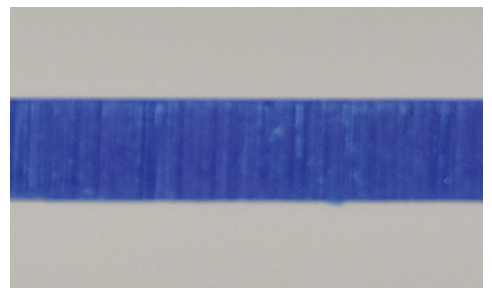

Ply View



BELTSERVICE
CORPORATION

beltservice.com

REV 3/23