

**Catalog #**                      **220**
**Item number:**                      **43297**
**Description:**

Xraythane GLxMT 95A 3mm

**International Designation:**

N/A

**Pulley Diameter, Minimum**

Min. Pulley Dia. - Head @ 80 - 100% Tension                      0.00 in

Min. Pulley Dia. - Head @ 60 - 79% Tension                      0.00 in

Min. Pulley Dia. - Head @ 59% Tension or Below                      0.00 in

Minimum Pulley Diameter- Tail                      0.00 in

**Construction:**

Compound Top Cover                      N/A

Color                      N/A

Top Cover Thickness (in)                      (0.00 mm) 0.00 in

Top Cover Description                      N/A

Compound Bottom Cover                      N/A

Bottom Cover Thickness (in)                      (0.00 mm) 0.00 in

Bottom Cover Description                      N/A

Number of Plies                      N/A

Overall Gauge (in)                      (0.00 mm) 0.00 in

Unit Weight- lb/PIW                      0.0000 lbs/PIW

Carcass Type                      N/A

Compound                      N/A

Temperature Range (°F)- High                      0 °F

Temperature Range (°F)- Low                      0 °F

**Splice Instructions:**

Splice Step Size                      4.00 in

Splice Process                      Finger

**Other:**

Static Conducting                      No

Cross Rigid                      No

High Heat                      No

Impression Top                      No

Oil Resistant                      No

Fire Resistant                      No

FDA Approved                      No

**Suggested Fasteners:**

Flexco Plate/Rivet                      N/A

Flexco Hinged                      N/A

Alligator Staple                      N/A

Clipper Lace                      N/A

Alligator Lace                      N/A

**Belt Strength:**

Tension Rating (PIW)                      0 PIW

**Special Characteristics:**

N/A

\*\*\*\*\*All Values are nominal and subject to change without notice.\*\*\*\*\*

<b>St. Louis, MO</b>	<b>Boise, ID</b>	<b>Charlotte, NC</b>	<b>Grand Prairie, TX</b>	<b>Philadelphia, PA</b>	<b>Sacramento, CA</b>	<b>Vancouver, WA</b>	<b>Beltservice Canada</b>	<b>Beltservice de Mexico</b>
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266

# DETECTABLE FLAT AND POSITIVE DRIVE


X-RAYTHANE HD 95A

**220**


Catalog Number

**43297**


Part Number

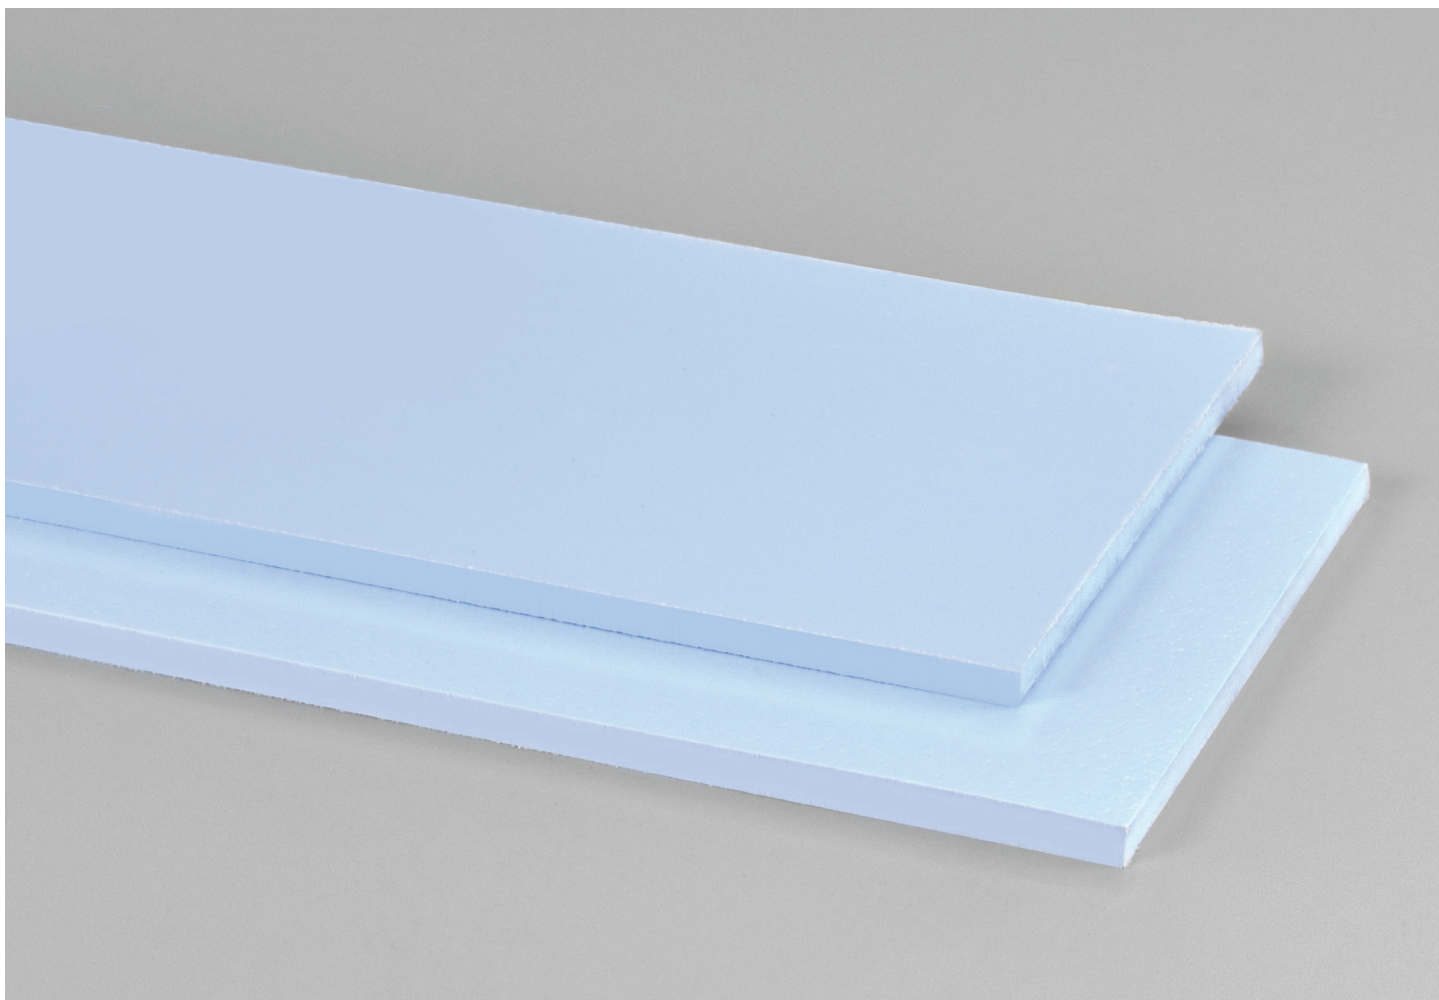

Top Cover View

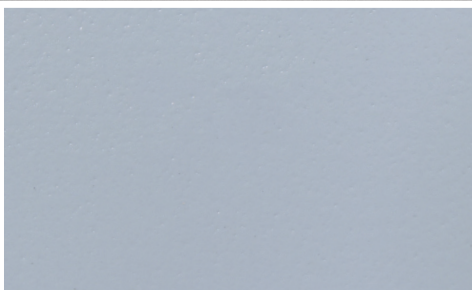

Bottom Cover View

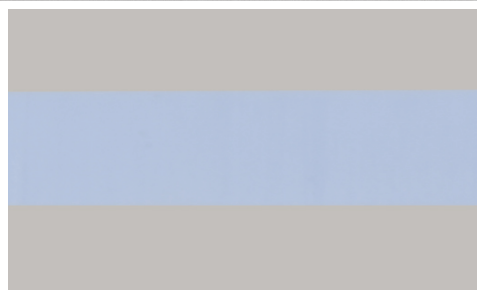

Ply View



**BELTSERVICE**  
CORPORATION

[beltservice.com](http://beltservice.com)

REV 3/23