

Catalog # 304

Item number: 33464

**Description:** 

Magnethane MTxMT 85A 3mm

**International Designation:** 

N/A

**Construction:** 

Compound Top Cover N/A Color N/A (0.00 mm) 0.00 in Top Cover Thickness (in) Top Cover Description N/A Compound Bottom Cover N/A

Bottom Cover Thickness (in) (0.00 mm) 0.00 in **Bottom Cover Description** N/A

Number of Plies N/A Overall Gauge (in) (0.00 mm) 0.00 in

Unit Weight- lb/PIW 0.0000 lbs/PIW

Carcass Type N/A Compound N/A 0°F Temperature Range (°F)- High Temperature Range (°F)- Low 0°F

**Belt Strength:** 

Tension Rating (PIW) 0 PIW Pulley Diameter, Minimum

Min. Pulley Dia. - Head @ 80 - 100% 0.00 in

Tension

Min. Pulley Dia. - Head @ 60 - 79% 0.00 in

Tension

Min. Pulley Dia. - Head @ 59% Tension 0.00 in

or Below

Minimum Pulley Diameter- Tail 0.00 in

**Splice Instructions:** 

Splice Step Size 0.00 in Splice Process N/A

Other: Static Conducting No Cross Rigid No High Heat No Impression Top No

Oil Resistant No Fire Resistant No **FDA Approved** No

Suggested Fasteners:

Flexco Plate/Rivet N/A Flexco Hinged N/A Alligator Staple N/A Clipper Lace N/A **Alligator Lace** N/A

## **Special Characteristics:**

N/A

\*\*\*\*\*All Values are nominal and subject to change without notice.\*\*\*\*

St. Louis, MO Charlotte, NC **Grand Prairie, TX** Philadelphia, PA Sacramento, CA Vancouver, WA **Beltservice Canada** Beltservice de Mexico Boise, ID 800-727-2358 800-423-4469 800-849-2358 800-727-2358 800-777-1314 800-289-2358 800-234-2358 877-210-7423 +52 55 53620434 314-344-8500 208-342-4681 704-949-2100 314-344-8555 215-295-1900 916-419-7191 360-567-4280 905-565-9217 +44 2980 3266




## DETECTABLE FLAT AND POSITIVE DRIVE

**MAGNETHANE 85A 3MM** 



33464
Part Number

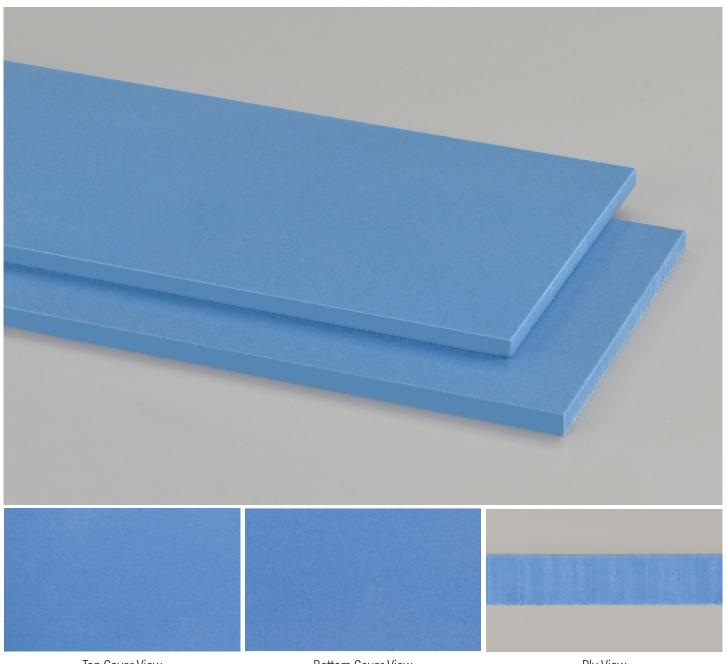

Top Cover View Bottom Cover View Ply View



beltservice.com