Catalog # 260M

Item number: 42781

Description:

SDB40B3 18 S/DRIVE

International Designation:

N/A

Construction:

Compound Top Cover Polyurethane

Top Cover DescriptionSmoothTop Cover Shore95ACompound Bottom CoverPolyurethane

Bottom Cover Description

Bottom Cover Shore


Solvent Shore

Solve

Overall Gauge (in) (3.00 mm) 0.1180 in Unit Weight- lb/PIW 0.0614 lbs/PIW

Maximum Width (in) 18 in
Temperature Range (°F)- High 140 °F
Temperature Range (°F)- Low -4 °F

Pulley Diameter, Minimum



A) Normal Flex

(101.60 mm) 4.0000 in

B) Back Flex

(101.60 mm) 4.0000 in

Belt Strength:

Pull for 1% Elongation

(6 N/mm) 36 PIW

Splice Instructions:

Splice Process Butt Weld

Note: Listed above is a guideline only. Every vulcanizer is different and will show different results. We recommend that you do a test splice with your press before attempting the actual belt splice.

Other:

Oil Resistant Yes
Fire Resistant No
FDA Approved Yes

Special Characteristics:

S/Drive is a monolithic urethane belt (95 Shore A) driven by lugs spaced on 40mm centers. A single row of drive lugs is located in the center of the belt for widths up to 30" and dual rows of lugs on 602mm centers for belt widths from 36" to 60". The positively driven S/Drive is easy to splice and track with no risk of slippage, even in greasy and humid environments.

*****All Values are nominal and subject to change without notice.*****

Beltservice Canada Vancouver, WA Beltservice de Mexic St. Louis, MO Boise, ID Charlotte, NC **Grand Prairie, TX** Philadelphia, PA Sacramento, CA 800-727-2358 800-423-4469 800-849-2358 800-727-2358 800-777-1314 800-289-2358 800-234-2358 877-210-7423 +52 55 53620434 208-342-4681 704-949-2100 905-565-9217 314-344-8500 314-344-8555 215-295-1900 916-419-7191 360-567-4280 +44 2980 3266




PROCLEAN POSITIVE DRIVE

SDB40B3 18 S/DRIVE

260M
Catalog Number

42781
Part Number

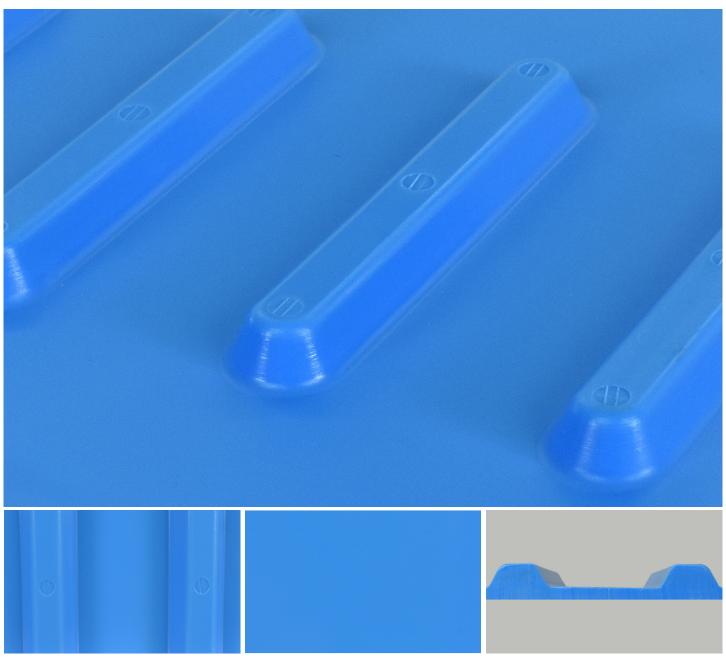

Top Cover View Bottom Cover View Ply View

