Catalog # 133D

Item number: 32079

Description:

2 Ply Poly 69 Black PVC ID AS FR


International Designation:

EM12/2 0/V6 Black ID AS FR

Construction:

Compound Top Cover Black PVC Top Cover Thickness (in) (0.60 mm) 0.0236 in **Top Cover Description Inverted Drop Top Cover Shore** 35 Compound Bottom Cover Polyester Bottom Cover Thickness (in) (0.00 mm) 0.0000 in **Bottom Cover Description** Bare **Bottom Cover Shore** N/A Number of Plies 2 Anti Static Yes Overall Gauge (in) (2.60 mm) 0.1024 in Unit Weight- Ib/PIW 0.0495 lbs/PIW Material Between Plies **PVC** Maximum Width (in) 102 in Temperature Range (°F)- High 176 °F Temperature Range (°F)- Low -4 °F

Pulley Diameter, Minimum



A) Normal Flex

(50.00 mm) 1.9685 in

B) Back Flex

(75.00 mm) 2.9528 in

Belt Strength:

Pull for 1% Elongation

(12 N/mm) 69 lbs/sq in

Splice Instructions:

Foil Yes
Splice Process Finger
Press Temperature (°F) 330 °F
Press Pressure (psi) 25 lbs/sq in

Note: Listed above is a guideline only. Every vulcanizer is different and will show different results. We recommend that you do a test splice with your press before attempting the actual belt splice.

Other:

Cross Rigid

No

Impression Top Yes
Oil Resistant No
Fire Resistant Yes
FDA Approved No

Special Characteristics:

N/A

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO800-727-2358
800-423-4469
314-344-8500
208-342-4681

Charlotte, NC 800-849-2358 704-949-2100 **Grand Prairie, TX** 800-727-2358 314-344-8555

Philadelphia, PA 800-777-1314 215-295-1900

Sacramento, CA 800-289-2358

916-419-7191

Vancouver, WA 800-234-2358 360-567-4280

Beltservice Canada 877-210-7423 905-565-9217 +52 55 53620434 +44 2980 3266



POWER TURN REPLACEMENT BELTS


133D
Catalog Number

32079

Part Number

2 PLY POLY 69 BLACK PVC ID AS FR

INTERNATIONAL DESIGNATION: EM12/2 0/V6 BLACK ID AS FR

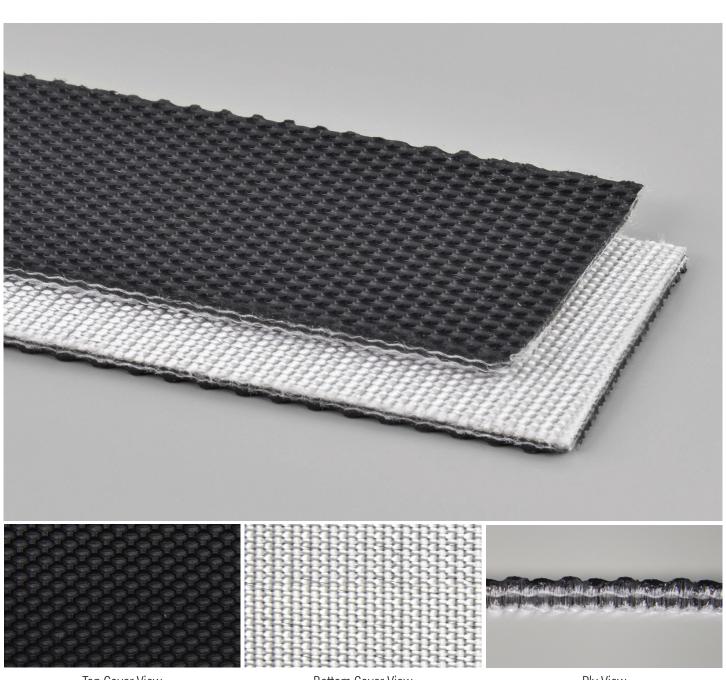

Top Cover View Bottom Cover View Ply View

