

Catalog # **16-2**
Item number: **10282**
Description:

2 Ply Solid Woven Cotton

International Designation:

N/A

Pulley Diameter, Minimum

Minimum Pulley Diameter 1.50 in

Belt Strength:

Tension Rating (PIW) 45 PIW

Construction:

Compound Top Cover White Cotton Fabric

Color White

Top Cover Thickness (in) (0.00 mm) 0.00 in

Top Cover Description Untreated

Compound Bottom Cover White Cotton Fabric

Bottom Cover Thickness (in) (0.00 mm) 0.00 in

Bottom Cover Description Untreated

Number of Plies 2

Overall Gauge (in) (2.38 mm) 3/32 in

Unit Weight- lb/PIW 0.0320 lbs/PIW

Carcass Type Cotton

Compound White Cotton Fabric

Temperature Range (°F)- High 225 °F

Temperature Range (°F)- Low -40 °F

Splice Instructions:

Splice Step No

Splice Finger No

Other:

Static Conducting No

Cross Rigid No

High Heat No

Impression Top No

Oil Resistant No

Fire Resistant No

FDA Approved Yes

Suggested Fasteners:

Flexco Plate/Rivet N/A

Flexco Hinged N/A

Alligator Staple N/A

Clipper Lace #1

Alligator Lace #7

Special Characteristics:

Still a popular conveyor belting, particularly in the food and baking industries. Economical answer to many light and medium conveying needs, especially slider bed applications. The belt is firmly woven; non-rubberized. Number of stripes usually indicates the number of plies. Also can be used as an air-permeable fabric designed for pneumatic conveyors.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO	Boise, ID	Charlotte, NC	Grand Prairie, TX	Philadelphia, PA	Sacramento, CA	Vancouver, WA	Beltservice Canada	Beltservice de Mexico
800-727-2358	800-423-4469	800-849-2358	800-727-2358	800-777-1314	800-289-2358	800-234-2358	877-210-7423	+52 55 53620434
314-344-8500	208-342-4681	704-949-2100	314-344-8555	215-295-1900	916-419-7191	360-567-4280	905-565-9217	+44 2980 3266


SOLID WOVEN COTTON
2 PLY SOLID WOVEN COTTON

16-2

Catalog Number

10282

Part Number

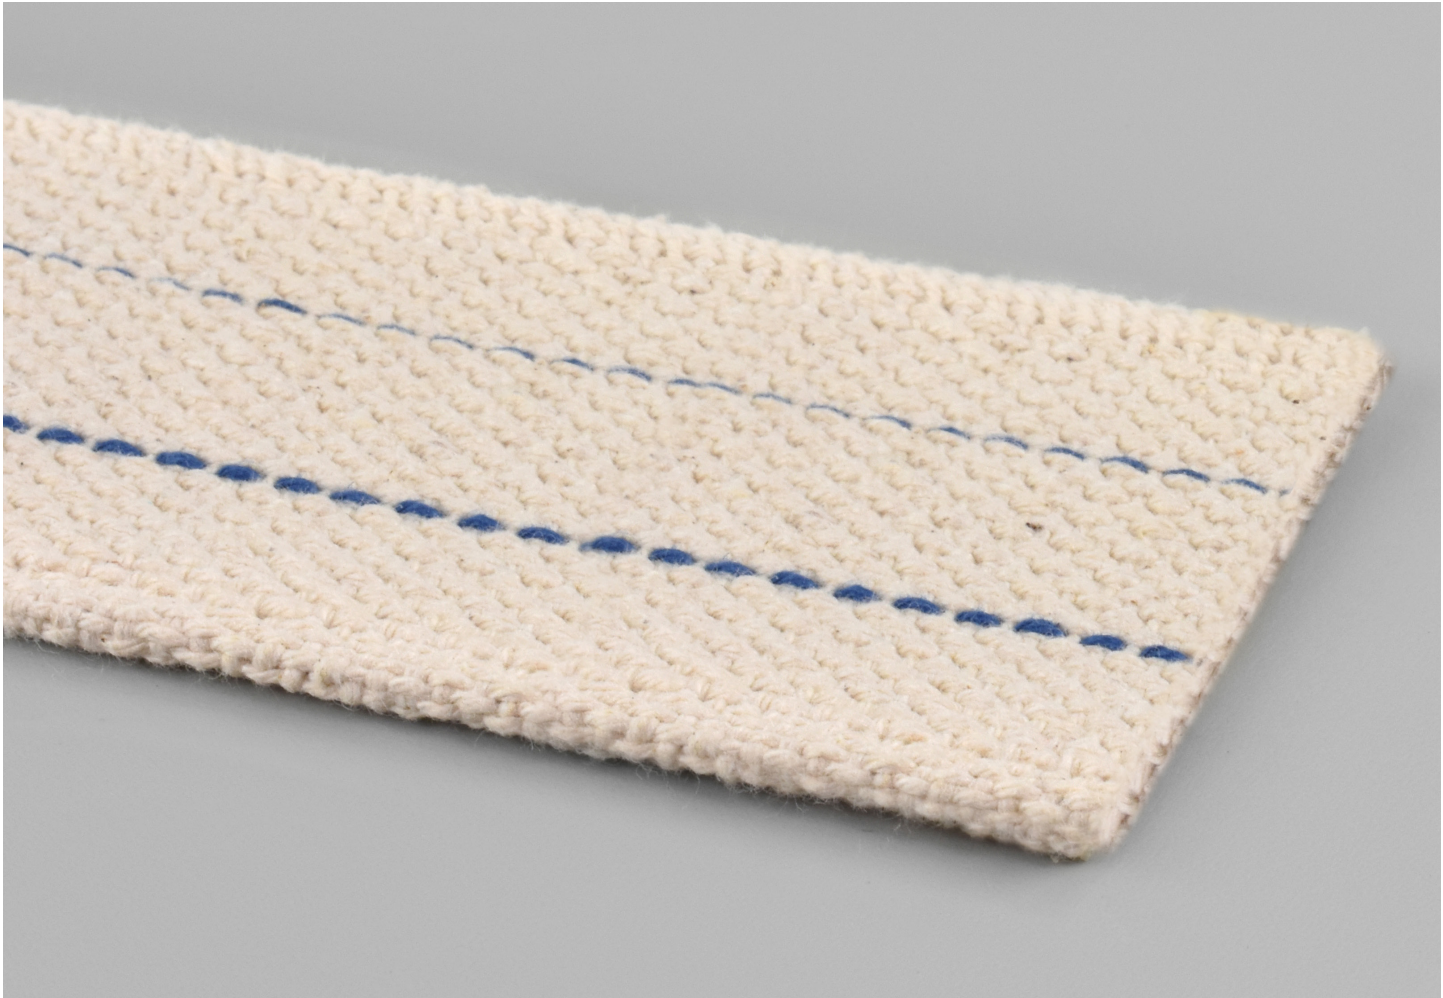

Top Cover View



Bottom Cover View



Ply View