

Catalog # **245**
Item number: **50188**
Description:

PCRFB IO50xMT 98A 3.5mm

International Designation:

N/A

Construction:

Compound Top Cover Blue PU

Top Cover Description Matte

Top Cover Shore 98 Shore A

Compound Bottom Cover Blue PU

Bottom Cover Description Oval

Bottom Cover Shore 98 Shore A

Number of Plies 1

Anti Static No


Overall Gauge (in) (3.50 mm) 0.1378 in

Unit Weight- lb/PIW 0.7800 lbs/PIW

Maximum Width (in) 48 in

Temperature Range (°F)- High 160 °F

Temperature Range (°F)- Low 15 °F

Pulley Diameter, Minimum


A) Normal Flex (35.05 mm) 1.3800 in

B) Back Flex (35.05 mm) 1.3800 in

Belt Strength:

Pull for 1% Elongation (7 N/mm) 40 PIW

Splice Instructions:

Splice Process Butt Weld

Note: Listed above is a guideline only. Every vulcanizer is different and will show different results. We recommend that you do a test splice with your press before attempting the actual belt splice.

Other:

Oil Resistant Yes

Fire Resistant No

FDA Approved Yes

Special Characteristics:

#245 is an FDA and USDA approved extruded flat belt with embedded aramid cords on 15mm centers. This belt will not fray and has minimal stretch, reducing the need for re-tensioning. Commonly used in meat and cheese processing.

*****All Values are nominal and subject to change without notice.*****

St. Louis, MO 800-727-2358 314-344-8500	Boise, ID 800-423-4469 208-342-4681	Charlotte, NC 800-849-2358 704-949-2100	Grand Prairie, TX 800-727-2358 314-344-8555	Philadelphia, PA 800-777-1314 215-295-1900	Sacramento, CA 800-289-2358 916-419-7191	Vancouver, WA 800-234-2358 360-567-4280	Beltservice Canada 877-210-7423 905-565-9217	Beltservice de Mexico +52 55 53620434 +44 2980 3266
--	--	--	--	---	---	--	---	--

PROCLEAN FLAT



PCRFBB-1050XMT 98A

245


Catalog Number

50188


Part Number

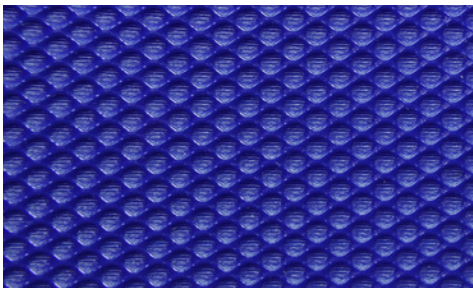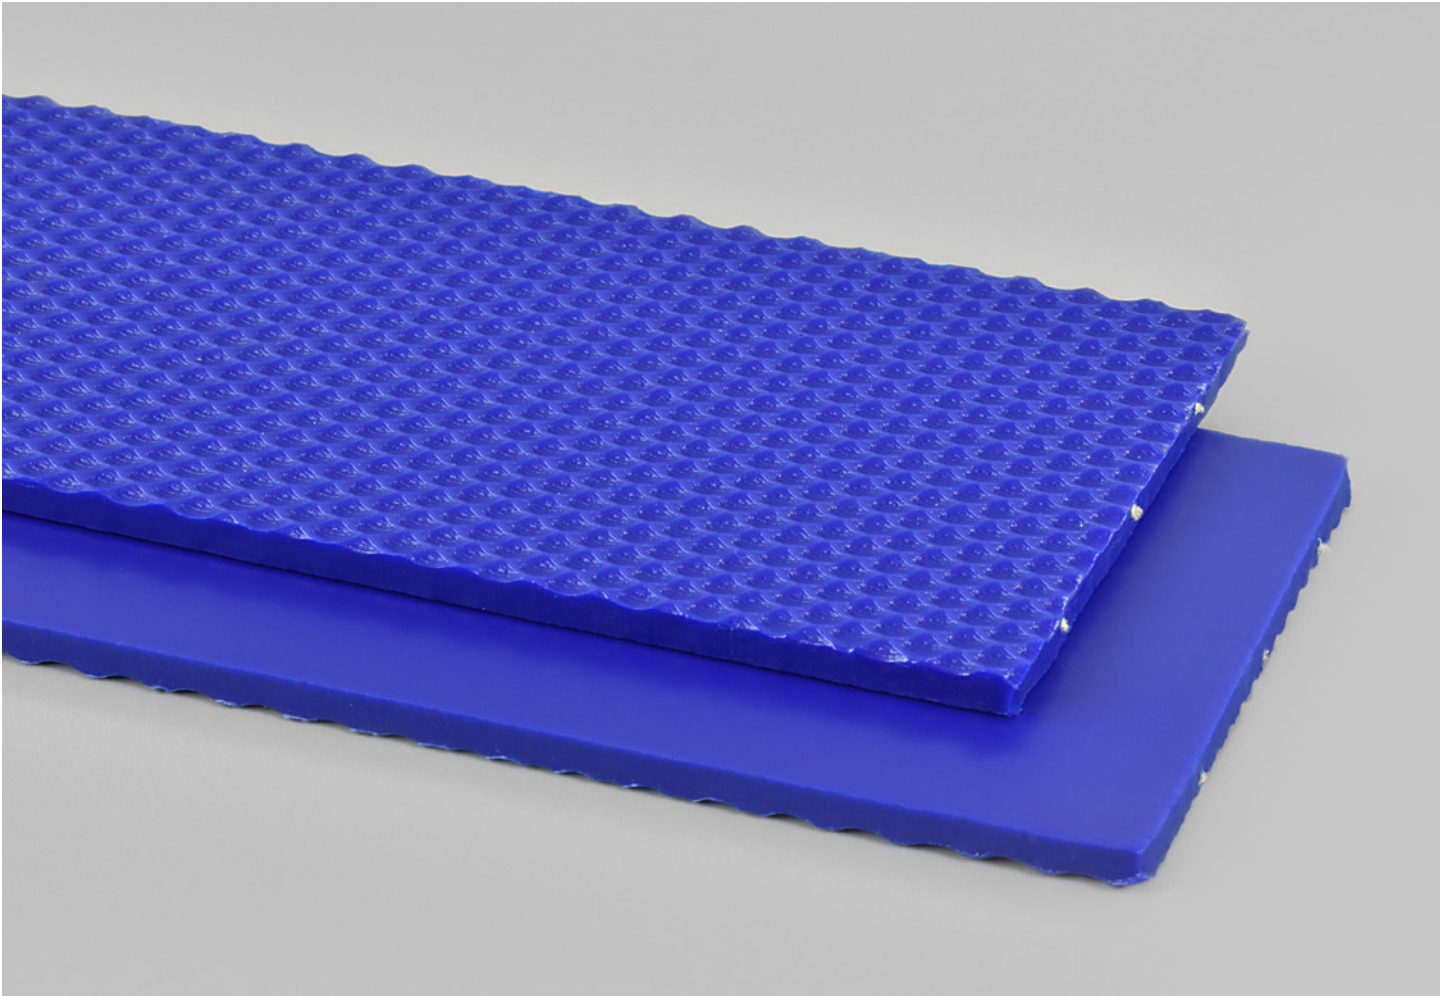

Top Cover View

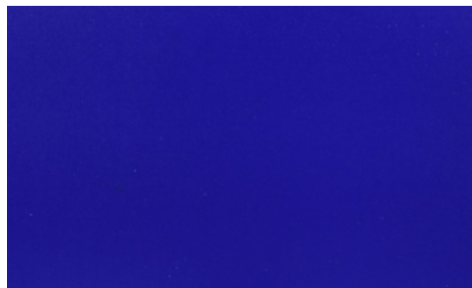

Bottom Cover View

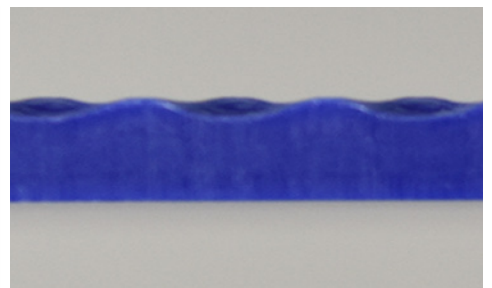

Ply View