
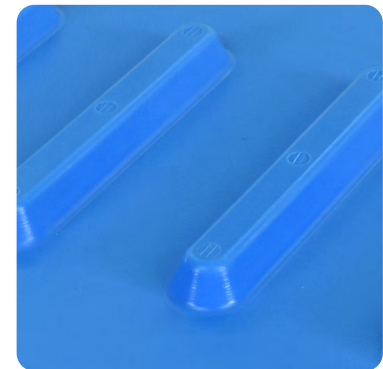
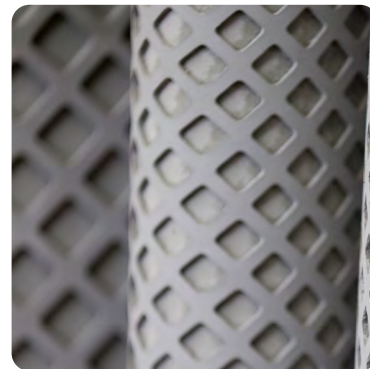


BELT SPECIFICATIONS

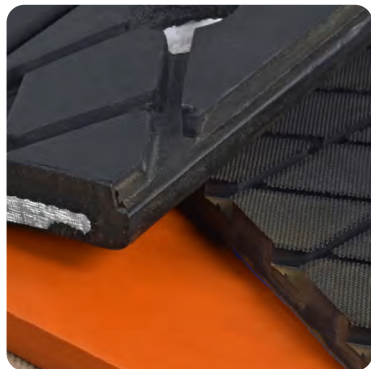

LIGHT DUTY SPECIFICATIONS

Catalog #	Part #	Description	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Flexco Plate/Rivet	Flexco Hinged	Clipper Lace	Alligator Staple	Alligator Lace
1	10372	2 PLY 15 OZ. WHITE NITRILE COS	3/32"	0°/250°F	2"	.0560 lbs			#1A		#7
2	10374	3 PLY 15 OZ. WHITE NITRILE COS	1/8"	0°/250°F	2.5"	.0750 lbs			#1	#62	#7
3	10376	4 PLY 15 OZ. WHITE NITRILE COS	5/32"	0°/250°F	3"	.0920 lbs			#2		#20
4	10378	5 PLY 15 OZ. WHITE NITRILE COS	3/16"	0°/250°F	4"	.1080 lbs			#2	#125	#20
5	10382	2 PLY POLY 60 WHITE NITRILE COS	5/64"	0°/250°F	1.5"	.0440 lbs			#1XSP		#1
6	10398	3 PLY POLY 90 WHITE NITRILE COS	3/32"	0°/250°F	2"	.0620 lbs			#1A		#7
7	10385	2 PLY POLY 100 WHITE NITRILE FDA COS	7/64"	0°/250°F	2"	.0620 lbs			#1A		#7
8	10390	3 PLY POLY 150 WHITE NITRILE FDA COS	5/32"	0°/250°F	2.5"	.0750 lbs			#2	#125	#15
8A	10388	3 PLY POLY 135 WHITE NITRILE FDA 1/32 X 1/32in	3/16"	0°/250°F	4"	.1070 lbs			#2	#125	#20
8B	10948	2 PLY POLY 100 WHITE RMV COS	1/8"	0°/180°F	2"	.0620 lbs			#1	#62	#7
8C	10949	3 PLY POLY 150 WHITE RMV COS	9/64"	0°/180°F	3"	.0750 lbs			#2	#125	#15
9	10401	3 PLY POLY 105 WHITE BUTYL FDA COS	3/32"	-65°/300°F	1.5"	.0560 lbs			#1A	#62	#7
10	10402	3 PLY POLY 105 WHITE TEFLON FDA COS	1/16"	0°/250°F	2.5"	.0500 lbs			#1XSP	#62	#1
11	10384	2 PLY POLY 60 WHITE NITRILE PEBBLETOP	3/32"	0°/250°F	2"	.0500 lbs			#1A	#62	#7
12	10400	3 PLY POLY 90 WHITE NITRILE PEBBLETOP	1/8"	0°/250°F	2.5"	.0620 lbs			#1	#62	#15
13	10392	3 PLY POLY 150 WHITE NITRILE MEATCLEAT	1/4"	0°/250°F	2.5"	.0980 lbs			#1	#125	#7
14	10396	3 PLY 90 GREEN NITRILE COS	3/32"	0°/250°F	2"	.0560 lbs			#1A	#62	#7
15A	10692	3 PLY 150 TAN NITRILE COS	9/64"	0°/250°F	3"	.0700 lbs			#2	#125	#15
16-2	10282	2 PLY SOLID WOVEN COTTON	3/32"	-40°/225°F	1.5"	.0320 lbs			#1		#7
16-3	10312	3 PLY SOLID WOVEN COTTON	1/8"	-40°/225°F	2"	.0440 lbs			#1		#7
16-4	10342	4 PLY SOLID WOVEN COTTON	3/16"	-40°/225°F	3"	.0560 lbs			#3		#20
16A	10208	POLYVEYOR 0.5 CFM RATED #1950	1/4"	-60°/310°F	0"	.0600 lbs					
16B	10210	POLYVEYOR 1.5 CFM RATED #1951	1/4"	-60°/310°F	0"	.0550 lbs					
16C	10204	WPLP SOLID WOVEN POLYESTER	7/32"	-60°/310°F	0"	.0600 lbs					
16E	10202	WPHP SOLID WOVEN POLYESTER	3/16"	-60°/310°F	0"	.0520 lbs					
16F	10211	POLYVEYOR/KEVLAR 1.5 CFM RATED #5925-C	5/16"	-60°/500°F	0"	.0600 lbs					
16G	34229	WEARSLIDE NON-WOVEN 0.5 CFM ABRASION RESISTANT	1/4"	-60°/310°F	0"	.0600 lbs					
16H	34228	WEARSLIDE NON-WOVEN 1.5 CFM ABRASION RESISTANT	1/4"	-60°/310°F	0"	.0550 lbs					
17	10956	PVC 450 WHITE C X C SC/FR/OR/FDA	23/64"	0°/180°F	10"	.1940 lbs	R5				
18	10952	PVC 200 WHITE C X C SC/FR/OR/FDA	7/32"	0°/180°F	6"	.1310 lbs	R2		#4-1/2		
20	10957	PVC 120 WHITE C X FS OR/FDA	9/64"	0°/180°F	2"	.0690 lbs			#2	#125	#15
20B	50241	PVC 120 Royal Blue C x FS OR/FDA	1/8"	0°/180°F	2"	.8500 lbs			#2	#125	#15
21	10950	PVC 150 WHITE C X FS OR/FDA	5/32"	0°/180°F	3"	.0750 lbs			#2	#125	#15
22	10953	PVC 100 WHITE ROUGHTOP X FS OR FDA	17/64"	0°/180°F	2.5"	.0940 lbs			#1	#125	#7

LIGHT DUTY SPECIFICATIONS

Catalog #	Part #	Description	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Flexco Plate/Rivet	Flexco Hinged	Clipper Lace	Alligator Staple	Alligator Lace
23	10951	PVC 100 WHITE CHEVRON TOP II X FS OR FDA	7/32"	0°/180°F	2"	.0730 lbs			#1	#125	#7
23A	10955	PVC 120 WHITE CRESCENT TOP X FS FDA	9/32"	0°/180°F	2"	.0800 lbs			#1	#125	#7
24	10696	3 PLY BROWN NITRILE FBS	1/16"	0°/250°F	.75"	.0380 lbs			#1XSP		
25	10706	5 PLY BROWN NITRILE FBS	7/64"	0°/250°F	1.5"	.0620 lbs			#1A		#7
26	10714	7 PLY BROWN NITRILE FBS	5/32"	0°/250°F	3"	.0880 lbs			#2	#125	#20
26A	10716	9 PLY BROWN NITRILE FBS	13/64"	0°/250°F	4"	.1000 lbs			#3	#187	#27
27	10700	4 PLY POLY 200 BLK HEAVY DUTY NITRILE FBS	5/32"	0°/250°F	2"	.0880 lbs			#2	#125	#20
27A	10702	4 PLY POLY 180 BLK NEOPRENE FBS-SC	7/64"	-20°/250°F	2"	.0560 lbs			#1		#7
28	10708	5 PLY POLY 225 BLK HEAVY DUTY NITRILE FBS	11/64"	0°/250°F	3"	.0940 lbs			#3		#20
29	10686	2 PLY CP30 BLACK NITRILE COS	3/32"	0°/250°F	2"	.0560 lbs			#1A	#62	#7
30	10698	3 PLY POLY 135 BLK NITRILE COS	9/64"	0°/250°F	2.5"	.0750 lbs			#1	#125	#15
31	10688	2 PLY POLY 70 BLACK CHECKOUT BELT	1/16"	0°/250°F	2"	.0380 lbs			#1XSP	#62	#00
32	10704	4 PLY TAN SLIPTOP	1/8"	-20°/250°F	2"	.0700 lbs			#1	#62	#15
38	10881	3 PLY CP30 BLACK FS X FS	1/8"	-40°/250°F	2.5"	.0560 lbs			#1	#62	#15
39	10883	3 PLY CP30 TAN FS X FS	9/64"	-40°/250°F	2.5"	.0620 lbs			#2	#125	#15
40	10884	4 PLY CP30 TAN FS X FS	3/16"	-40°/250°F	3"	.0940 lbs			#3	#187	#25
41	10886	5 PLY CP30 TAN FS X FS	1/4"	-40°/250°F	6"	.1370 lbs	R2		#4-1/2	#187	#27
42	10888	4 PLY 35 OZ. TAN FS X FS SILVER HARD DUCK	15/64"	-40°/250°F	6"	.1130 lbs	R2		#4	#187	#27
43	10890	5 PLY 35 OZ. TAN FS X FS SILVER HARD DUCK	5/16"	-40°/250°F	8"	.1560 lbs	R2	#375	#5		#35
44	10892	6 PLY 35 OZ. TAN FS X FS SILVER HARD DUCK	3/8"	-40°/250°F	10"	.1810 lbs	R5	#550	#6		#45
45	10894	8 PLY 35 OZ. TAN FS X FS SILVER HARD DUCK	1/2"	-40°/250°F	16"	.2130 lbs	R5	#550			
46	10580	3 PLY HOT STOCK & WATER	9/64"	-40°/250°F	2.5"	.0560 lbs			#2	#125	#15
46A	10586	3 PLY RED SILICONE COVER HOT STOCK & WATER	1/8"	-100°/500°F	3"	.0560 lbs			#2	#125	#15
46B	10596	4 PLY RED SILICONE COVER HOT STOCK & WATER	3/16"	-100°/500°F	4"	.0810 lbs			#3	#187	#25
46C	10582	3 PLY HSW W/ 1/32" WHITE SMOOTH SILICONE X FS	5/32"	-100°/500°F	3"	.0750 lbs			#3	#125	#25
47	10590	4 PLY HOT STOCK & WATER	3/16"	-40°/250°F	3"	.0880 lbs			#3	#125	#25
48	10694	3 PLY CP30 BLACK 1/16" X FS	7/32"	-40°/250°F	4"	.1060 lbs			#4	#187	#25
49	10644	3 PLY CP30 BLACK 1/16" PEBBLETOP X FS	7/32"	-40°/250°F	4"	.1000 lbs			#4	#187	#25
50	11041	3 PLY HSW 1/8" URETHANE X FS	5/16"	0°/188°F	8"	.1250 lbs	R2		#5		#35
51	10462	2 PLY 220 TAN BARE X BARE	5/32"	-25°/225°F	8"	.0690 lbs	R2			#125	#15
52	10454	2 PLY 150 BLACK 1/32" X BARE	1/8"	-25°/225°F	6"	.0690 lbs			#2	#125	#15
53	10456	2 PLY 160 BLACK 1/8" X BARE MOR	7/32"	-25°/225°F	6"	.1260 lbs	R5	#375		#187	
53A	10882	4 PLY 180 BLACK 3/32" SMOOTH NITRILE TOP X BARE	1/4"	0°/225°F	4"	.1300 lbs			#5	#187	#25
53B	10458	2 PLY 220 1/8" X BARE MOR	15/64"	-25°/225°F	10"	.1420 lbs	#140/R5			#187	

LIGHT DUTY SPECIFICATIONS

Catalog #	Part #	Description	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Flexco Plate/Rivet	Flexco Hinged	Clipper Lace	Alligator Staple	Alligator Lace
53C	10448	2 PLY 220 3/16" X BARE MOR	9/32"	-25°/225°F	10"	.1700 lbs	#140R5	#375 #550			
54	10602	2 PLY 150 BLACK ROUGHTOP X BARE	9/32"	-40°/250°F	2"	.1000 lbs			#1	#125	#1
54(FR)	24357	2 PLY 150 BLK ROUGHTOP X B FR	.266"	-30°/180°F	3"	.0970 lbs			#1	#125	#1
55	10610	2 PLY 150 TAN ROUGHTOP X BARE	9/32"	-40°/250°F	2"	.1000 lbs			#1	#125	#1
55A	10620	2 PLY 210 GRAY ROUGHTOP X BARE	5/16"	-40°/250°F	6"	.1060 lbs			#2	#125	#15
56	10648	3 PLY CP30 BLACK ROUGHTOP X FS	5/16"	-40°/250°F	2.5"	.0930 lbs			#1	#125	#7
56A	10634	3 PLY 225 BLACK ROUGHTOP X BARE	21/64"	-40°/250°F	2.5"	.1170 lbs			#2	#187	#15
57	10680	4 PLY CP30 BLACK ROUGHTOP X FS	13/32"	-40°/250°F	4"	.1100 lbs			#1	#125	#15
58	10668	3 PLY CP30 TAN RUBBER ROUGHTOP X FS	5/16"	-40°/250°F	2.5"	.1000 lbs			#1	#125	#7
59	10666	3 PLY CP30 TAN GENUINE PUREGUM ROUGHTOP X FS	5/16"	-40°/250°F	2"	.0930 lbs			#1	#125	#7
59A	10616	2 PLY 160 TAN PUREGUM ROUGHTOP X BARE	9/32"	-40°/250°F	3"	.1000 lbs			#1	#125	#1
59B	10632	3 PLY 180 TAN PUREGUM ROUGHTOP X BARE	5/16"	-40°/250°F	4"	.0940 lbs			#2	#125	#7
59C	10678	4 PLY 240 TAN PUREGUM ROUGHTOP X BARE	23/64"	-40°/250°F	8"	.1300 lbs			#2	#187	#15
60	10672	3 PLY 135 BROWN NITRILE ROUGHTOP X FS	1/4"	0°/250°F	3"	.1000 lbs			#1	#125	#1
60A	10638	3 PLY 225 TAN PUREGUM ROUGHTOP X BARE	5/16"	-40°/250°F	8"	.1340 lbs			#1	#125	#7
60C	10630	3 PLY 150 BROWN BUTYL ROUGHTOP X BARE	19/64"	-65°/300°F	2.5"	.1000 lbs			#1	#125	#1
61	10674	3 PLY 135 TAN CARBOX NITRILE ROUGHTOP X BARE	17/64"	0°/250°F	2"	.1000 lbs			#1	#125	#1
61A	10662	3 PLY 150 BLUE CARBOX NITRILE ROUGHTOP X BARE	9/32"	0°/250°F	2.5"	.1130 lbs			#2	#125	#15
61B	10628	3 PLY 150 BLUE CARBOX NITRILE RT X FS	9/32"	0°/250°F	2.5"	.1040 lbs			#2	#125	#15
61C	27998	3 PLY 225 BLUE CARBOX NITRILE RT X BB	19/64"	0°/250°F	8"	.1150 lbs			#2	#125	#15
62	10660	3 PLY CP30 BLACK V-RIDGE X FS	5/16"	-40°/250°F	2.5"	.1000 lbs			#1	#125	#7
63	10654	3 PLY CP30 BLACK DURALIFT X FS	13/32"	-40°/250°F	3"	.1250 lbs			#1	#125	#7
64	10658	3 PLY CP30 BLACK STEEPGRADE X FS	5/16"	-40°/250°F	3"	.1000 lbs			#1	#125	#7
65	10664	3 PLY CP30 TAN GENUINE PG STEEPGRADE X FS	5/16"	-40°/250°F	2.5"	.1190 lbs			#1	#125	#7
67	10608	2 PLY 150 BLK WEDGEGRIP X BARE	9/32"	-40°/250°F	3"	.1060 lbs			#1	#125	#1
67A	10612	2 PLY 150 TAN WEDGEGRIP X BARE	9/32"	-40°/250°F	3"	.1060 lbs			#1	#125	#1
67B	10642	3 PLY 225 TAN WEDGEGRIP X BARE	5/16"	-40°/250°F	4"	.1250 lbs			#1	#125	#7
69A	10939	PVC 120 BLACK CRESCENT TOP X BRUSHED	1/4"	0°/180°F	3"	.0750 lbs			#1	#125	#7
69B	10945	PVC 200 BLACK CRESCENT TOP X BRUSHED	5/16"	0°/180°F	4"	.1130 lbs			#4	#187	#27
86	10940	PVC 120 BLACK ROUGHTOP X BRUSHED	1/4"	0°/180°F	2"	.0900 lbs			#1	#125	#7
87	10941	PVC 120 GREEN SUPERGRIP ROUGHTOP X BRUSHED	9/32"	0°/180°F	3"	.0900 lbs			#1	#125	#7
87A	22843	PVC 200 RED SUPERGRIP ROUGHTOP X BRUSHED	11/32"	0°/180°F	4"	.1290 lbs			#4-1/2	#187	#27
88	10937	PVC 100 BLK CHEVRON TOP II X BRUSHED MOR	15/64"	0°/180°F	2.5"	.0880 lbs			#1	#125	#7

LIGHT DUTY SPECIFICATIONS

Catalog #	Part #	Description	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Flexco Plate/Rivet	Flexco Hinged	Clipper Lace	Alligator Staple	Alligator Lace
88LZ	50261	2 PLY 150 BLACK PVC LARGE Z X FS MOR	3/8"	-20°/180°F	8.0"	.1083 lbs			#1	#125	#7
88SZ	27268	2 PLY 150 BLACK PVC SMALL Z X FS MOR	1/4"	-20°/180°F	4.0"	.0890 lbs			#1	#125	#7
90	10896	PVC 120 BLK C X C	5/32"	0°/180°F	2.5"	.0750 lbs			#2	#125	#15
91	10898	PVC 120 BLK C X BRUSHED	9/64"	0°/180°F	2.5"	.0700 lbs			#2	#125	#15
92	10901	PVC 120 BLK FS X BRUSHED FR	7/64"	0°/180°F	2"	.0600 lbs			#1	#125	#7
93	10902	PVC 150 BLK C X C	3/16"	0°/180°F	3"	.1060 lbs			#3	#125	#20
94	10906	PVC 150 BLK C X BRUSHED	5/32"	0°/180°F	3"	.0750 lbs			#2	#125	#15
95	10908	PVC 150 BLK FS X BRUSHED FR	1/8"	0°/180°F	3"	.0560 lbs			#1	#125	#15
96	10912	PVC 200 BLK C X C SC/FR	15/64"	0°/180°F	4"	.1190 lbs	R5	#375	#4-1/2	#187	#27
97	10914	PVC 200 BLK C X BRUSHED	13/64"	0°/180°F	4"	.1060 lbs			#4-1/2	#187	
98	10916	PVC 200 BLK FS X BRUSHED FR	3/16"	0°/180°F	4"	.0940 lbs			#4-1/2	#187	#25
98A	10920	PVC 250 BLK C X C SC/FR	17/64"	0°/180°F	6"	.1450 lbs	R2				
98B	49560	PVC 250 BLK C X FS	15/64"	0°/180°F	6"	.1178 lbs	R2			#187	#27
99	10922	PVC 350 BLK C X C SC/FR	17/64"	0°/180°F	8"	.1600 lbs	R5	#550			
99A	10926	PVC 350 BLK C X BRUSHED FR/SC	1/4"	0°/180°F	8"	.1420 lbs	R2				
100	10930	PVC 450 BLK C X C SC/FR	5/16"	0°/180°F	10"	.1940 lbs	R5				
100A	41992	PVC 600 BLK C X C SC/FR	3/8"	0°/180°F	12"	.2000 lbs	R5				
101	10932	PVC 750 BLK C X C SC/FR	13/32"	0°/180°F	14"	.2250 lbs	R6				

HEAVY DUTY SPECIFICATIONS

Catalog #	Part #	Description	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Flexco Plate/Rivet	Flexco Hinged	Clipper Lace	Alligator Staple	Alligator Lace
70	10406	2 PLY 150 1/32" X 1/32"	5/32"	-25°/225°F	6"	.0880 lbs				#125	
70A	10418	2 PLY 150 1/16" X 1/32"	3/16"	-25°/225°F	6"	.1190 lbs				#125	
71	10416	2 PLY 150 1/8" X 1/32"	1/4"	-25°/225°F	8"	.1440 lbs	#140/R5	#375 or #550		#187	
72	10412	2 PLY 150 1/8" X 1/16"	9/32"	-25°/225°F	8"	.1560 lbs	R5	#375		#187	#27
72A	49520	2 PLY 160 1/16" X 1/64" GRAPE BELT	11/64"	-25°/225°F	6"	.0900 lbs				#125	
73	10426	2 PLY 220 1/8" X 1/16"	19/64"	-25°/225°F	10"	.1660 lbs	#140/R5	#375 or #550			
74	10428	2 PLY 220 1/8" X 1/16" MOR/SC	19/64"	-25°/225°F	10"	.1660 lbs	#140/R5	#375 or #550			
74A	10427	2 PLY 220 1/8" X 1/16" FR/SC/MOR	19/64"	-25°/225°F	10"	.1660 lbs	#140/R5	#375 or #550			
74B	10422	2 PLY 220 1/16" X 1/16" FR/SC/VOR	1/4"	-25°/225°F	10"	.1200 lbs	#140/R5	#375 or #550			
74C	10452	2 PLY 220 5/32" X 3/32" FR-SBR	3/8"	-25°/225°F	10"	.2130 lbs	#190/R5	#375 or #550			
75	10430	2 PLY 220 3/16" X 1/16"	23/64"	-25°/225°F	10"	.1810 lbs	#140/R5	#375 or #550			
75A	10468	3 PLY 225 1/8" X BARE MOR	1/4"	-25°/225°F	10"	.1560 lbs	#140/R5	#375 or #550			
75B	10444	2 PLY 220 3/16" X 1/16" MOR/SC	11/32"	-25°/225°F	10"	.1810 lbs	#140/R5	#375 or #550			
76	10516	3 PLY 330 1/16" X 1/16" FR/SC/VOR	17/64"	-25°/225°F	10"	.1450 lbs	#190/R5	#550			
77	10488	3 PLY 330 3/16" X 1/16"	13/32"	-25°/225°F	12"	.2130 lbs	#190/R5-1/2	#550			
77A	10498	3 PLY 330 3/16" X 1/16" MOR/SC	13/32"	-25°/225°F	12"	.2130 lbs	#190/R5-1/2	#550			
77B	10504	3 PLY 330 3/32" X BARE MOR	1/4"	-25°/225°F	12"	.1500 lbs	R5	#550			
77C	10476	3 PLY 330 1/16" X BARE	7/32"	-25°/225°F	12"	.1250 lbs	R2/R5				
77D	10500	3 PLY 330 3/16" X BARE	3/8"	-25°/225°F	12"	.1810 lbs	#190/R5-1/2	#550			
77E	10530	4 PLY 440 1/4" X BARE	1/2"	-25°/225°F	16"	.2400 lbs	BR-6/R5-1/2				
77F	10502	3 PLY 330 3/16" X BARE MOR	3/8"	-25°/225°F	12"	.1810 lbs	#190/R5	#550			
77G	49524	3 PLY 330 1/16" X BARE MOR	7/32"	-25°/225°F	12"	.1250 lbs	R2/R5				
78	10478	3 PLY 330 1/4" X 1/16"	7/16"	-25°/225°F	12"	.2190 lbs	#190/R5-1/2	#550			
79	10470	3 PLY 225 3/16" TAN PUREGUM X BARE	11/32"	-20°/225°F	8"	.1630 lbs	#140/R5				
79A	41332	3 PLY 330 TAN PURE GUM 13/64" X BARE	3/8"	-20°/225°F	10"	.1750 lbs	#140/R5				
79XT	50232	3 PLY 170 7/16" GREY DIAMOND X BARE	37/64"	-40°/200°F	6"	.3260 lbs			#1	#125	#15
80	10526	4 PLY 440 1/4" X 1/16"	17/32"	-25°/225°F	16"	.2690 lbs	BR-10/R6				
80A	10536	4 PLY 440 3/8" X 3/32"	11/16"	-25°/225°F	16"	.3440 lbs	BR-10/R6				
80B	10510	3 PLY 600 1/4" X 1/16"	9/16"	-25°/225°F	18"	.3130 lbs	BR-10/R6				

HEAVY DUTY SPECIFICATIONS

Catalog #	Part #	Description	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Flexco Plate/Rivet	Flexco Hinged	Clipper Lace	Alligator Staple	Alligator Lace
80C	10520	3 PLY 600 1/16" X 1/16" FR/SC/VOR	3/8"	-25°/225°F	18"	.2150 lbs	BR-6/R5-1/2				
80D	24157	3 PLY 600 3/8" X 1/8"	45/64"	-25°/225°F	18"	.3400 lbs	BR-10/R6				
80E	10512	3 PLY 600 3/16" X BARE MOR	27/64"	-25°/225°F	18"	.2200 lbs	BR-10/R5-1/2				
80F	47777	3 PLY 600 1/4" X BARE MOR	1/2"	-25°/225°F	18"	.2450 lbs	BR-10/R5-1/2				
80G	49536	3 PLY 750 1/4" X BARE MOR	17/32"	-25°/225°F	20"	.2888 lbs		R6			
80H	41791	3 PLY 705 1/4" MOR X 2 mm BROWN BACK	37/64"	-20°/225°F	20"	.3070 lbs	BR-10/R6				
81	10434	2 PLY 220 3/16" X 1/16" HOT ASPHALT SOR	3/8"	-10°/300°F	10"	.1810 lbs	#190/R5	#375 or #550			
81A	10492	3 PLY 330 3/16" X 1/16" HOT ASPHALT SOR	13/32"	-10°/300°F	12"	.2130 lbs	#190/R5-1/2	#550			
82	10438	2 PLY 220 3/16" X 1/16" HR 400°F	3/8"	-20°/400°F	10"	.1810 lbs	#190/R5	#375 or #550			
82B	10494	3 PLY 330 3/16" X 1/16" HR 400°F	13/32"	-20°/400°F	12"	.2130 lbs	#190/R5-1/2	#550			
83	10482	3 PLY 330 1/4" X 1/16" HR 400°F	15/32"	-20°/400°F	12"	.2190 lbs	#190/R6	#550			
83A	10466	3 PLY 225 1/8" X BARE HR 400°F	19/64"	-20°/400°F	10"	.1560 lbs	#190/R5	#375 or #550			
83B	10528	4 PLY 440 1/4" X 1/16" HR 400°F	17/32"	-20°/400°F	16"	.2690 lbs	BR-6/R5-1/2				
83C	27609	1 PLY 440 1/4" X 1/8" STRAIGHT WARP GRADE-I	33/64"	-25°/225°F	16"	.2700 lbs	BR-10/R5-1/2				
83D	28586	1 PLY 225 1/8" X 1/16" STRAIGHT WARP	1/4"	-25°/225°F	10"	.1400 lbs	R5				
83E	50183	1 PLY 330 3/16" X 1/16" STRAIGHT WARP	3/8"	-25°/225°F	14"	.2170 lb	R5				
83F	50184	2 PLY 660 3/8" X 1/8" STRAIGHT WARP DIN Y	3/4"	-25°/225°F	20"	.3350 lbs	BR-10/R6 or R5-1/2				
84	10998	SKIRTBOARD 60DURO - 1/4"	1/4"			.1440 lbs					
89	28234	2 PLY 220 3/16" X 1/16" PEAK HR 700°F	3/8"	-20°/700°F	10"	.1810 lbs	#190/R5	#375 or #550			
89A	28236	3 PLY 330 3/16" X 1/16" PEAK HR 700°F	13/32"	-20°/700°F	12"	.2130 lbs	#190/R5-1/2	#550			
89B	28235	3 PLY 330 1/4" X 1/16" PEAK HR 700°F	15/32"	-20°/700°F	12"	.2190 lbs	#190/R5-1/2	#550			
89C	28238	4 PLY 440 1/4" X 1/16" PEAK HR 700°F	17/32"	-20°/700°F	16"	.2690 lbs	BR-6/R5-1/2				
140	10552	2 PLY 220 1/8" X 1/16" CLEAT TOP MOR	9/32"	-25°/225°F	10"	.2100 lbs	#140/R5	#375 or #550			
140A	10556	3 PLY 330 1/8" X 1/16" CLEAT TOP MOR	23/64"	-25°/225°F	12"	.2650 lbs	#190/R5	#550			
140B	10544	2 PLY 220 1/8" X BARE CLEAT TOP MOR	7/32"	-25°/225°F	10"	.1650 lbs	#190	#550			
140C	10566	3 PLY 330 1/8" X BARE CLEAT TOP MOR	25/64"	-25°/225°F	12"	.2300 lbs	#190/R5	#550			
141	10548	2 PLY 220 1/8" X 1/16" MULTI-CHEV MOR	9/32"	-25°/225°F	10"	.1900 lbs	#140/R5	#375 or #550			
142	10560	3 PLY 330 3/16" X 1/16" MULTI-CHEV MOR	25/64"	-25°/225°F	12"	.2500 lbs	#190/R5-1/2	#550			
144	10542	2 PLY 150 1/16" X BARE MINI CLEAT TOP	5/32"	-25°/225°F	6"	.1250 lbs	R2			#125	

LIGHTWEIGHT SPECIFICATIONS

Catalog #	Part #	Description	International Designation	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Finger Splice	Clipper Lace	Plastic Spiral	Alligator Lace
102	10740	1 PLY POLY CR28 WHITE PVC C X BARE NA FDA	E5/1 0/V5 WHITE NA FDA	.0394"	5°/176°F	.3930"	.0183 lbs	✓	✓	✓	✓
103F	42448	1 PLY POLY 23 LIGHT GREEN FS X FS FDA	E4/1 U0/U0 LIGHT GREEN FDA	.0236"	-4°/176°F	.2480"	.0075 lbs	✓	✓	✓	✓
103L	50172	1 PUR X 35 MAT/LCW	E 7/1 U0/U35 MATTE BLUE AS FDA EU	.0374"	-13°/140°F	.1969"	.0179 lbs	✓	✓	✓	✓
103RCAS	10750	1 PUR B 35 MAT / ALCW	E5/1 U0/U2 WHITE MATTE AS	.0280"	8°/176°F	.1600"	.0117 lbs	✓	✓	✓	✓
104	10834	2 PLY POLY CR45 WHITE PVC BARE X BARE FDA	E8/2 0/V/0 WHITE NA FDA	.0630"	14°/176°F	1.574"	.0307 lbs	✓	✓	✓	✓
104AS	10802	2 PLY POLY CR45 WHITE PU AS BARE X BARE AS FDA	E8/2 U0/U0 WHITE AS FDA	.0512"	-4°/194°F	.3900"	.0239 lbs	✓	✓	✓	✓
104B	10876	3 PLY POLY CR86 BLK PVC B X QW AS	E15/3 U1/QW BLACK AS	.1024"	-4°/176°F	4.7244"	.0425 lbs	✓	✓	✓	✓
104C	50204	2 PLY POLY CR57 BLK PVC MF X QW AS FR	E10/2 0/V0 BLACK QW AS FR	.0740"	5°/176°F	2.360"	.0330 lbs	✓	✓	✓	✓
105K	49905	2 PLY POLY/COTTON TAN PU BARE X BARE NA FDA	ESC 7/2 0/U/0 TAN NA FDA EU	.0591"	5°/194°F	.3937"	.0217 lbs	✓	✓	✓	✓
107	10838	2 PLY POLY CR46 WHITE PVC C X BARE NA FDA	E8/2 0/V5 WHITE NA FDA	.0787"	14°/176°F	1.180"	.0358 lbs	✓	✓	✓	✓
107ASB-FR	49500	2 PLY POLY CR46 BLK PVC C X QW AS FR	E8/2 U0/V5 BLACK QW AS FR	.0787"	15°/180°F	1.1811"	.0409 lbs	✓	✓	✓	✓
107ASQ	10840	2 PLY POLY CR46 WHITE PVC C X QW AS FDA	E8/2 0/V5 QW AS WHITE FDA	.0830"	5°/176°F	1.181"	.0358 lbs	✓	✓	✓	✓
108BPU	10806	2 PUR X K 20 MAT I / ACW	E8/2 U0/U3 BLUE FDA AS	.0472"	-4°/176°F	.5906"	.0275 lbs	✓	✓	✓	✓
108GL	10752	2 PUR B 20 / EW	E10/2 U0/U2 WHITE PU GL NA FDA EU	.0511"	-13°/194°F	.3930"	.0248 lbs	✓	✓	✓	✓
108HCR	10774	2 PUR I 75 I / LCW	E13/2 U1/U75 CLEAR MATTE AS FDA EU	.0930"	-13°/194°F	2.750"	.0450 lbs	✓	✓	✓	✓
108HRG	50185	2 PUR X 25 / EHR	EM 11/2 RG/U25 BLUE M NA FDA EU	.0709"	-13°/140°F	.9843"	.0341 lbs	✓	✓	✓	✓
108HRGW	50226	2 PURB25/EHR	EM 11/2 RG/U25 WHITE M NA FDA EU	.0709"	-13°/140°F	.9843"	.0341 lbs	✓	✓	✓	✓
108HT	49864	2 PLY POLY CR28 WHITE PU MATTE X BARE AS FDA HT	E5/2 U0/U2 WHITE HT AS	.0472"	-4°/311°F	.3150"	.0205 lbs	✓*			
108HTB	50171	2 PLY POLY CR28 BLUE PU MATTE X BARE AS FDA HT	E5/2 U0/U2 BLUE HT AS	.0472"	-4°/311°F	.3150"	.0205 lbs	✓*			
108MRG	10748	2 PUR X 40 / FHR	EM14/2 U3RG/U3 BLUE M NA FDA EU	.0900"	-13°/194°F	2.360"	.0366 lbs	✓	✓	✓	✓
108NFW-NA	50227	2 PURB25H/SW	ENF 7/2 U0/U25 WHITE MT EU	.0551"	-13°/140°F	.5900"	.0264 lbs	✓	✓	✓	✓
108PLB	50224	2 PURX30MATI/PCW	E0/2 U0/U3 BLUE MTAS	.0570"	-40°/194°F	.0394"	.0273 lbs	✓	✓	✓	✓
108QHR	49965	2 PUR I 60 HR / LW	E12/2 U0/U6 CLEAR RG NA FDA EU	.0906"	-13°/194°F	.9843"	.0427 lbs	✓	✓	✓	✓
108RCAS	10814	2 PUR B 20 MAT I/A/CW	E10/2 U0/U2 MT WHITE AS FDA EU	.0512"	-13°/194°F	.3937"	.0247 lbs	✓	✓	✓	✓
108RED	32626	2 PUR IR 100 I / LCW	E13/2 U1/U10 RED GLOSS AS	.1020"	-13°/194°F	3.140"	.0550 lbs	✓	✓	✓	✓
108RGB	49029	2 PUR X 55 HR X / CW	E10/2 U0/U55 RG BLUE AS FDA/EU	.0670"	-13°/140°F	.9843"	.0308 lbs	✓	✓	✓	✓
108T	42650	2 PLY POLY 22 GRAY TEFLON FDA	E2/2 U0/T1 GRAY TEFLON FDA	.0512"	-4°/176°F	2.7559"	.0222 lbs	✓	✓	✓	✓
108V	50225	3 PURIR180I/LW	E 18/3 U0/U18 RED MT	.1969"	-13°/140°F	7.0866"	.1030 lbs	✓	✓	✓	✓
108Z	41957	3 PUR N 130 H I / LCW	E18/3 U0/U15 BLACK MATTE AS	.1480"	-13°/194°F	5.1181"	.0767 lbs	✓	✓	✓	✓
109	10822	2 PLY POLY CR46 WHITE IP NA FDA	E8/2 U0/V5 WHITE IP FDA	.0906"	14°/176°F	1.5748"	.0409 lbs	✓	✓	✓	✓
111A	10812	2 PLY POLY CR46 PETROL GREEN PVC C X BARE AS	E8/2 0/V5 PETROL GREEN AS	.0787"	5°/176°F	1.1811"	.0358 lbs	✓	✓	✓	✓
111B	32699	2 PLY POLY CR69 PETROL GREEN PVC C X B NA	E12/2 0/V1 GREEN PVC GLOSS NA	.1100"	5°/176°F	1.970"	.0458 lbs	✓	✓	✓	✓
111RB	49911	2 PLY POLY CR46 ROYAL BLUE PVC MATTE X BARE AS FDA	E8/2 V0/V5 MT BLUE AS FDA	.0787"	10°/180°F	1.181"	.0410 lbs	✓	✓	✓	✓
112	10798	2 PLY POLY CR45 BLK PVC C X BARE AS	E8/2 0/V5 BLACK M AS	.0787"	5°/176°F	1.180"	.0358 lbs	✓	✓	✓	✓

* BIAS DOUBLE FINGER

LIGHTWEIGHT SPECIFICATIONS

Catalog #	Part #	Description	International Designation	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Finger Splice	Clipper Lace	Plastic Spiral	Alligator Lace
112HCR	41735	2 PLY POLY HCR 69 BLACK PVC M AS	E12/2 U0/V5 M AS	.1063"	14°/158°F	2.3622"	.0512 lbs	✓	✓	✓	✓
113	10808	2 PLY POLY CR46 DARK GREEN PU MATTE X BARE AS	E8/2 0/U3 M GREEN AS	.0550"	-4°/176°F	.7900"	.0242 lbs	✓	✓	✓	✓
113D	10756	2 PLY POLY CR51 PETROL GREEN PU MATTE C X FS AS FR FDA	E9/2 U0/U8 MT GREEN AS FR FDA	.0850"	-10°/176°F	1.1800"	.0425 lbs	✓	✓	✓	✓
114	10780	2 PLY SPUN-POLY 74 BLK PVC C X BARE	EM13/2 0/V4 BLACK NA	.1417"	-20°/180°F	2.500"	.0783 lbs	✓	✓	✓	✓
115	10776	2 PLY POLY 57 GREEN PVC C X IP AS	E10/2 V10IP/V10 GREEN AS	.1181"	14°/176°F	3.150"	.0597 lbs	✓	✓	✓	✓
115A	10754	3 PLY POLY 85 GREEN PVC C X IP	E15/3 V8IP/V7 GREEN NA	.1811"	5°/180°F	3.930"	.0833 lbs	✓	✓	✓	✓
115B	48339	2 PLY POLY CR46 BLUE PVC C X IP FDA	E8/2 V8IP/V7 BLUE FDA	.1220"	14°/180°F	1.9685"	.0558 lbs	✓	✓	✓	✓
115F	42410	2 PLY POLY 102 GREEN NBR STR X BARE	E18/2 0/NBR STR GREEN	.0748"	32°/176°F	2.3622"	.0308 lbs	✓	✓	✓	✓
116	10810	2 PLY POLY CR57 PETROL GREEN PVC RT X BARE	E10/2 0/V40 GREEN PVC RT NA	.2080"	23°/176°F	2"	.0766 lbs	✓	✓	✓	✓
116A	10764	2 PLY POLY 86 BLUE AS PVC ST X BARE	E15/2 0/V20AS BLUE PVC X B	.1575"	23°/176°F	3.150"	.0816 lbs	✓	✓	✓	✓
116B	10870	3 PLY POLY CR125 GRAY ST X BARE AS	E22/3 0/ASV20 GRAY ST	.1889"	23°/176°F	4.720"	.0991 lbs	✓	✓	✓	✓
116FR	50260	2 PLY BLACK PVC ROUGH TOP FLAME RETARDANT	E12/2 V0/V3 BLACK RT FR	.1850"	20°/170°F	1.200"	.0632 lbs	✓	✓	✓	✓
116J	29382	2 PLY POLY CR57 PETROL GREEN PVC JINK RT X QW	E10/2 0/V37 GREEN JINK RT X QW NA	.2086"	-4°/140°F	2.360"	.0750 lbs	✓	✓	✓	✓
116RB	49910	2 PLY POLY CR57 ROYAL BLUE PVC RT X BARE AS FDA	E10/2 V0/V32 BLUE RT AS FDA	.1850"	0°/160°F	1.9685"	.0632 lbs	✓	✓	✓	✓
117	10872	3 PLY POLY CR74 WHITE PVC C X BARE NA FDA	E13/3 0/V10 WHITE FDA NA	.1600"	10°/180°F	4.720"	.0900 lbs	✓	✓	✓	✓
117A	10878	3 PLY POLY HCR 86 WHITE PVC X BARE FDA	E15/3 0/V5 HCR WHITE PVC	.1535"	14°/176°F	3.937"	.0733 lbs	✓	✓	✓	✓
118A	50233	E5/1 0/V8 LG BLACK AS FR	E 5/1 0/V8 LG BLACK AS	.0670"	14°/158°F	.7870"	.0150 lbs	✓	✓	✓	✓
118BLTFR	50258	2 PLY BLACK PVC BASKET WEAVE FLAME RETARDANT	E12/2 V0/V8 BLACK LT FR	.0906"	10°/175°F	1.200"	.0410 lbs	✓	✓	✓	✓
118FR	25199	2 PLY POLY CR68 BLK PVC LG X QW FR AS	E12/2 V0/V9 BLACK LG X QW AS FR	.1102"	-4°/176°F	1.1811"	.0444 lbs	✓	✓	✓	✓
118HAL	50244	2 PLY POLY CR80 GREEN RMV LG X FS	E14/2 U0/RMV11 LR Green AS	.0984"	0°/150°F	2.0000"	.0478 lbs	✓	✓	✓	✓
118IDFR	50256	2 PLY BLACK PVC INVERTED DIAMOND FLAME RETARDANT	E12/2 V0/V5 IF FR	.0866"	-12°/160°F	1.000"	.0390 lbs	✓	✓	✓	✓
118LT	10850	2 PLY POLY CR57 PETROL GREEN PVC LATTICE X QW AS	E10/2 0/V13 GREEN LT X AS QW	.1100"	-4°/140°F	2.750"	.0494 lbs	✓	✓	✓	✓
118R	25036	2 PLY POLY CR79 RED PVC LG X BARE AS	E14/2 0/V45 RED LG X B AS	.2500"	23°/176°F	1.970"	.1175 lbs	✓	✓	✓	✓
130	10737	1 PLY POLY 51 WHITE MATTE PU X BARE AS FDA	EM10/1 U0/U2 WHITE MT AS	.0354"	-4°/176°F	.3937"	.0153 lbs	✓	✓	✓	✓
131	10865	2 PLY POLY 69 GREEN PVC X BARE AS	EM12/2 0/V7 GREEN AS	.0945"	-4°/176°F	1.9685"	.0495 lbs	✓	✓	✓	✓
132	10763	2 PLY POLY 69 WHITE PU NA FDA	EM12/2 U0/U2 WHITE MT NA	.0709"	-4°/176°F	.3937"	.0376 lbs	✓	✓	✓	✓
132B	10762	2 PLY POLY 69 BLUE PU NA FDA	EM12/2 0/U2 BLUE PU NA	.0709"	-4°/176°F	.3937"	.0376 lbs	✓	✓	✓	✓
133	10864	2 PLY POLY 69 BLACK PVC IP AS FR	EM12/2 U0/V6 BLACK IP AS FR	.1023"	-4°/176°F	1.9685"	.0495 lbs	✓	✓	✓	✓
133D	32079	2 PLY POLY 69 BLACK PVC ID AS FR	EM12/2 0/V6 BLACK ID AS FR	.1024"	-4°/176°F	1.9685"	.0495 lbs	✓	✓	✓	✓
134	20781	2 PLY POLY 69 BLACK PVC AS FR	EM12/2 0/V6 BLACK AS FR	.0906"	14°/176°F	1.9685"	.0495 lbs	✓	✓	✓	✓
134HD	32244	2 PLY POLY 65 BLACK PVC AS FR	EM11/2 0/V6 AS FR	.1024"	20°/180°F	1.7500"	.0597 lbs	✓	✓	✓	✓
134M	26720	2 PLY POLY 69 BLACK PVC MATTE AS FR	EM12/2 0/V5 M AS FR	.0827"	-4°/194°F	1.5748"	.0461 lbs	✓	✓	✓	✓
134SG	10796	2 PLY POLY 65 BLACK PVC SAND GRIT AS FR	EM12/2 0/V7 BLACK SAND GRIT AS FR	.1142"	20°/180°F	1.7500"	.0614 lbs	✓	✓	✓	✓
138	22584	2 PLY 160 BLACK LI X B FR	EM28/2 0/15 SBR BLACK LI X B FR	.1350"	-30°/180°F	2.0000"	.0733 lbs	✓	✓	✓	✓

LIGHTWEIGHT SPECIFICATIONS

Catalog #	Part #	Description	International Designation	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Finger Splice	Clipper Lace	Plastic Spiral	Alligator Lace
139A	24230	NW 25 BLACK HC	NW 25 HC SF BLACK	.1024"	14°/250°F	1.500"	.0290 lbs		✓	✓	✓
139B	10867	NW 40 BLACK HC	NW 40 HC SF BLACK	.1574"	14°/250°F	3.500"	.0430 lbs		✓	✓	✓
139C	26568	NW 60 GREEN NA	NW 60 GREEN NA	.2220"	14°/250°F	5.000"	.0580 lbs		✓	✓	✓
139COS	50567	PHSW 125 BLACK PVC C X B FR	N/A	.1614"	180°/32°F	3"	.0680 lbs	✓	✓		✓
139D	50242	NW 33 BLACK HC	NW 33 HC SF BLACK	.1299"	10°/176°F	1.9685"	.0030 lbs		✓	✓	✓
139FBS	50566	PHSW 125 BLACK PVC F X B FR	N/A	.1457"	0°/180°F	2"	.0583 lbs	✓	✓		✓
139HFS	50573	PHSW 200 BLACK PVC F X B FR	N/A	.2047"	180°/32°F	4"	.0938 lbs	✓	✓		✓
139HTS	50569	PHSW 150 BLACK PVC F X B FR	N/A	.1732"	32°/180°F	4"	.0820 lbs	✓	✓		✓
139LFO	50570	PHSW 150 BLACK PVC LF SB X B FR-S	N/A	.1850"	180°/32°F	3.5"	.0850 lbs	✓	✓		✓
139LR	50572	PHSW 150 BLACK PVC LR X B FR	N/A	.2000"	180°/32°F	3.5"	.0819 lbs	✓	✓		✓
139MFO	50571	PHSW 150 BLACK PVC MF SB X B FR	N/A	.1850"	180°/32°F	3.5"	.0853 lbs	✓	✓		✓
140BBS	49989	NW 150 BLACK RMV FXF FR	ENW 26/1 RMV0/RMV0 BLACK FR	.1457"	0°/160°F	2.000"	.0529 lbs	✓	✓	✓	✓
140EMB	50237	NW 150 BLACK PVC EMB X BRUSHED FR	ENW 26/1 V0/V09 BLACK EMB FR	.1417"	20°/180°F	2.000"	.0529 lbs	✓	✓	✓	✓
140FBS	49904	NW 150 BLACK PVC F X F FR	ENW 26/1 V0/V0 BLACK FR	.1102"	0°/180°F	2.000"	.0529 lbs	✓	✓	✓	✓
140LR	49902	NW 150 BLACK PVC LR X F FR	ENW 25/1 V0/V13 BLACK LR FR	.1575"	0°/180°F	2.000"	.0751 lbs	✓	✓	✓	✓
140MFO	49959	NW 250 BLACK PVC SB X F AS FR	ENW 43/1 V0/V20 BLACK SB FR	.1560"	-10°/225°F	3.000"	.0785 lbs	✓	✓	✓	✓
140RT	49903	NW 150 BLACK PVC RT X F FR	ENW 25/1 V0/V29 BLACK RT FR	.2165"	0°/180°F	2.2835"	.0853 lbs	✓	✓	✓	✓
141Q	23427	NW 120 BLACK PVC HM X F FR	NW 120 HM X F FR BLACK	.1000"	0°/180°F	2.500"	.0500 lbs	✓	✓	✓	✓
145	10868	3 PLY POLY CR125 GRAY PVC C X BARE AS	E22/3 0/V20 GRAY AS	.1920"	5°/180°F	4.7244"	.0950 lbs	✓	✓	✓	✓
145A	41964	3 PLY POLY CR103 BLACK PVC MATTE C X BARE AS	E18/3 0/V10H BLACK MATTE AS	.1496"	5°/176°F	4.7244"	.0750 lbs	✓	✓	✓	✓
146	10874	3 PLY POLY 171 WHITE PVC C X C AS ATEX FDA	E30/3 P1/P2 WHITE PVC C X C SMOOTH ATEX	.2400"	5°/176°F	7.874"	.1317 lbs	✓	✓	✓	✓
200	29973	ZL BLUE CARBOX NITRILE SMOOTH TOP X B	N/A	.1330"	0°/250°F	2.000"	.0591 lbs				
201	29974	ZL BLUE CARBOX NITRILE ROUGH TOP X B	N/A	.2510"	0°/250°F	3.000"	.0975 lbs				
202	29975	ZL RED NATURAL RUBBER SMOOTH TOP X FS	N/A	.2001"	0°/250°F	4.000"	.1000 lbs				
202LG	32841	ZL RED NATURAL RUBBER LONGITUDINAL GROOVE X FS	N/A	.1650"	0°/250°F	3.000"	.0758 lbs				
203	29976	ZL WHITE NITRILE SMOOTH TOP X BARE FDA	N/A	.1260"	0°/250°F	3.000"	.0683 lbs				
204	30020	ZL BROWN NITRILE ROUGH TOP X FS FDA	N/A	.2500"	0°/250°F	3.000"	.0908 lbs				
204W	33293	ZL TAN NR DIAMOND IMPRESSION X FS	N/A	.2834"	0°/250°F	4.000"	.1250 lbs				

Catalog #	Part #	Description	International Designation	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Finger Splice	Clipper Lace	Plastic Spiral	Alligator Lace
SNTC-RB22A	42619	ELASTIC GREEN PU LR X BLUE KNIT FABRIC AS	EL BLUE KF/GREEN PU LR AS	.089"	-4°/140°F	1.000"	.034 lbs	✓			
TA12-BK	42621	ELASTIC CLEAR PU TAFFETA X BLACK EMBOSSED AS FR	ELPU BLACK EMB/CLEAR TF AS FR	.047"	-4°/140°F	1.000"	.019 lbs	✓			

LIGHTWEIGHT SPECIFICATIONS

Catalog #	Part #	Description	OAG mm	MP mm	K 1%	Color	Conveying Surface
210	31364	MAGNETHANE HD 95A	3	50	11.8 lbs/PIW	Blue	Embossed/Matte
240	42732	PCFBB 98A	3.5	50	11.8 lbs/PIW	Blue	Matte/Matte
241	42738	PCFBB-1050XID 98A	3.5	50	11.8 lbs/PIW	Blue	Inverted Oval/Inverted Diamond
245	50188	PCRFBB-1050XMT 98A	3.5	35	91 lbs/PIW	Blue	Inverted Oval/Matte

Catalog #	Part #	Description	OAG mm	MP mm	Max Pull	Color	Conveying Surface
251M	42807	DDB25B2.8 DEL/DRIVE 25	2.8	48	17 lbs/PIW	Blue	Matte
255M	42809	DDB50B3 DEL/DRIVE 50	3	95	36.5 lbs/PIW	Blue	Matte
256	42767	PCPD2B-ID 98A 2" PITCH	3.5	80	38 lbs/PIW	Blue	Inverted Diamond
257	50221	PCPD2B-1050 98A	3.5	80	38 lbs/PIW	Blue	Inverted Oval
260M	42781	SDB40B3 18 S/DRIVE	3	100	36.5 lbs/PIW	Blue	Matte
265M	42818	PO331LB2 POSITIVEBELT	3.2	100	39.33 lbs/PIW	Blue	Matte

Catalog #	Part #	Description	International Designation	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Finger Splice	Clipper Lace	Plastic Spiral	Alligator Lace
2B7	10828	2 PLY POLY CR57 CLEAR SILICONE PU SKIM X BARE NA FDA	E10/2 0/SI3 FDA	.0551"	-13°/230°F	1.370"	.0258 lbs	✓	✓	✓	✓
2B8	10830	2 PLY POLY CR45 WHITE SI X BARE HT AS FDA	E8/2 0/SI3 HT AS FDA	.0905"	-40°/356°F	1.960"	.0478 lbs	✓	✓	✓	✓
2B15	41885	IWP 140 3/32" RED URETHANE X FS	EM24/M U0/U24 RED	.1969"	5°/176°F	3.937"	.0916 lbs	✓	✓	✓	✓
2B20	41997	2 PLY POLY 69 CLEAR PO X FS AS FDA	ES12/2 P00/P06 CLEAR AS FDA	.1024"	-4°/140°F	3.1496"	.0410 lbs	✓	✓	✓	✓

Catalog #	Part #	Description	OAG mm	MP mm	K 1%	Color	Conveying Surface
302	33462	MAGNETHANE 85A 2MM	2	20	2.2 lbs/PIW	Blue	Matte/Matte
304	33464	MAGNETHANE 85A 3MM	3	30	3.3 lbs/PIW	Blue	Matte/Matte

Catalog #	Part #	Description	International Designation	Thickness	Temp. Range	Min Pulley Dia.	Weight (PIW)	Finger Splice	Clipper Lace	Plastic Spiral	Alligator Lace	Step Hot	Staple Lace
304AS	10866	3 PLY POLY 143 WHITE PVC B X BARE AS	ES25/3 VI/VI AS	.1339"	14°/212°F	5.905"	.0649 lbs	✓	✓	✓	✓		
304MFR	49839	2 PLY 90 MONO SBR BARE X BARE FR	PH E15/2 QW/R/MF FR AS	.1130"	-20°/225°F	1.000"	.0575 lbs	✓	✓	✓	✓		
304QFR	49025	3 PLY 200 MONO SBR QW X QW FR	PH E30/3 QW/R/QW FR AS	.1580"	-40°/250°F	4.000"	.0858 lbs	✓	✓	✓	✓		
304TFR	50262	2 PLY 160 MONO SBR BARE X BARE FR	PH E28/2 BXB FR	.0900"	-20°/225°F	5.000"	.0450 lbs		✓			✓	✓

ADDING VALUE

TO EVERYTHING WE TOUCH

This is our Core Focus and best represents who we are – it is our purpose, our cause and our passion. The heart of this concept goes beyond the products we offer, as it is most meaningful to the relationships we build. Our core values are our foundation while our unique attributes allow us to deliver concepts designed to add value to you, our customer.

Customers

Building a strong partnership that will move your business forward

Global Supplier Network

Being a trusted and reliable partner

Employees

Providing a safe and secure environment for a rewarding and fulfilling career

Industries and Local Communities

Making positive and lasting contributions



Get it **DONE**

- Complete the task at hand with minimal supervision and maximum collaboration.
- Be a team player who is also self-sufficient.
- Solve problems with a can-do attitude.
- Be positive and “all-in” when doing your job.



Raise the **STANDARD**

- Strive to continually improve yourself and the organization around you.
- Do not accept mediocrity.
- Be open to learning and be willing to teach.
- Have vision and understanding to be the best in the industry.



Do the **RIGHT THING**

- Put the greater good above all else.
- See the big picture and know the value of honesty and integrity.
- Be both humble and confident.
- Lead by example.



Passion **FOR SERVICE**

- Deliver a high-quality experience to customers, internal and external.
- Be responsive and dedicated to others.
- Do what you have committed to do with energy and enthusiasm.

OUR CORE VALUES ARE
THE FOUNDATION OF OUR RELATIONSHIPS



800-727-2358 | 314-344-8500

