



WESTMINSTER

INTERNATIONAL LTD

Telephone : +44 (0)1295 756300

Fax : +44 (0)1295 756302

E-Mail : info@wi-ltd.com

Website : www.wi-ltd.com

PD240 Hand Held Metal Detector



FEATURES

- NIJ standard - 0602.02 compliant
- Wide search area for faster and accurate screening operations
- Elegant, robust and ergonomic
- High immunity to floor rebars allows lower-body screening without sensitivity reduction
- Uniform detection of magnetic and non-magnetic targets
- Full digital design: consistent performance and calibration-free operations
- Indoor and outdoor operations

CEIA is proud to present the new pd240 hand held metal detector, a development of the well-established pd140 model. The pd240 combines high reliability and ergonomics with advanced detection and operator signalling features. Effective sensitivity to all metals, full compliance with the latest security standards and high immunity to external metal masses are among the main peculiarities of this new device.

ADVANTAGES & BENEFITS

- Programmable sensitivity
- Extended continuous operation time
- Automatic low power mode during screening pauses
- Embedded long life rechargeable batteries are renewable energy and wipe out operation cost of alkaline batteries
- Embedded fast and reliable battery charger: no need of batteries removal
- Dedicated holder acts as minimum space table stand and mains connection for battery charge
- Operator functions can be standard or customized by the user through pc gui and usb connection




HIGH IMMUNITY TO FLOOR REBARS

The PD240 incorporates innovative technical solutions which make it possible to operate much closer to floors with steel reinforcement bars than was previously possible with conventional hand-held detectors. All this without any reduction in sensitivity.

ELEGANT, ROBUST AND ERGONOMIC

The PD240 features a special ergonomic design consisting of an offset hand grip which ensures that the operator's hand does not interfere with the sensitive detection area. On the new model the sensitive area is 70% wider than before. This means fewer scans per person and therefore shorter inspection times per person. Special care has gone into the mechanical design of the detector. Absence of sharp edges or corners allows the detector to be passed smoothly over the inspected area without getting caught in buttons, buckles, folds or other parts of clothing.

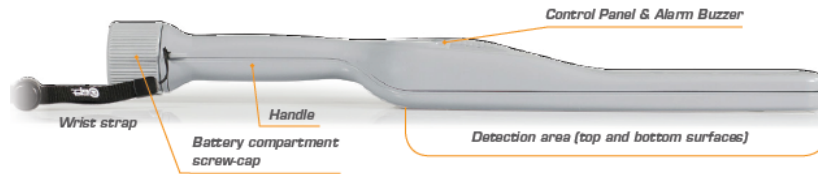

NIJ STANDARD 0602.02 COMPLIANT

The technical features of the detector comply with the NIJ standard 0602.02 and the new NIJ draft standard 0602.03. The PD240 has uniform sensitivity to magnetic and non-magnetic targets including those made of stainless steel. At the same time the detector offers excellent body-effect compensation and has high immunity to external disturbance from electromagnetic and mechanical sources.

FULL DIGITAL DESIGN

The PD240 is fully digital. Electronic functions include a inspection field transmitter-receiver based on Digital Signal Processing (DSP) technology, a digital operator interface and external communications over the incorporated USB port. This design combined with a special printed antenna ensures top reliability and very high repeatability.

ADVANCED CONTROL PANEL

The control panel with switches and warning lights is made from high-thickness silicon guaranteeing high degree of protection to make the PD240 suitable for indoor and outdoor use.

ADVANCED ALARM INDICATION

The alarm signalling modes include: optical alarm which is fixed or is proportional to the intensity of the detection signal; acoustic alarm with a constant tone or a tone which is proportional to the size of the object detected; vibration alarm signal. It is also possible for the safety manager or the checkpoint supervisor to lock one or more operator commands.

FULLY PROGRAMMABLE SIGNALING

- Proportional/Fixed, High Loudness Acoustic Alarm
- Proportional/Fixed, High Brightness Optical Alarm
- Vibration Alarm for Discrete Screening



- A – Power push button
- B, C – Alarm mode selection
- D, E, F – Sensitivity selection: Low, Medium, High
- G – Alarm indicator
- H – Battery charge indicator



Optical indication proportional to the metal signal strength (Low, Medium, High)

EXTENDED CONTINUOUS OPERATION TIME

The PD240 metal detector is powered by two AA-size NiMH batteries with a battery life of over 100 hours. A Low Power Mode is automatically activated during pauses, extending the battery life up to 200 hours. An internal circuit optimises battery recharging which takes less than five hours.

LATEST PLASTIC MATERIALS TECHNOLOGY

The metal detector casing is made from next-generation technical polymers. These plastics offer high chemical resistance and mechanical strength ensuring a long detector life even in heavy duty conditions.

SOPHISTICATED COMMUNICATION CAPABILITIES

The digital design of the new metal detector also enables the maximum flexibility in selecting how detection alarms are signalled. Users can keep the factory settings or connect the detector over its USB to a PC and then personalise the settings with a dedicated graphic interface.



SPECIFICATION

- Battery life 100 + hours continuous service (AA NiMH batteries 2500 mAh), up to 200 hours with automatic sleep mode, Low battery indicator, built-in fast battery charger in combination with the HHBC
- Colour: WG PD240: light grey RAL 7040 - Carry Bag: Green RAL 7013
- Compliance Conforms to the NIJ 0602.02 and the new NIJ 0602.03 Standards for metal detection
- Conforms to the international standards currently applicable for safety, EMC and to the applicable CE regulations
- Detection and operational functions: Customisable via HHMD Configuration tool
- Dimensions: WG PD240: 430mm x 80mm x 40mm, HHBC: 175mm x 115mm x 85mm, Carry Bag: 430mm x 340mm x 105mm, Detection Set Package WG

ORDERING INFORMATION

PD Set: part # PD 240-SET

ACCESSORIES

NIJ 0602.02 Test Pieces Kit:

- part # NIJ-HHMD-0602.02 (includes 11 test
- objects for LO, MO, SO, VSO security levels)

CARRY BAG: PART # 64081

HHMD Configuration tool: part # 63537

(includes special USB adapter with cable, GUI application software)

PART LIST – DESCRIPTION

PD 240 Hand Held Metal Detector

- PD240 Set: 450mm x 325mm x 115mm
- Fully customisable control panel: Optical, acoustic and vibration alarm modes, 3-level sensitivity selection buttons
 - Manufactured in grey shock-resistant technical polymers
 - Operating temperature: -40°C to 70°C
 - Power supply: 2x AA size NiMH, rechargeable batteries
 - Relative humidity: 0 to 98% (without condensation)
 - Storage temperature: -40°C to 80°C
 - Weight: WG PD240 with battery 470g, HHBC Desktop Battery Charger for WG PD240 with power adapter 755g, Carry Bag: 1.3 kg; Detection Set Package WG PD 240 Set: 2.2 kg

- Desktop Battery Charger
- Coupling pins for side-by-side charger placement
- Calibration NIJ compliant Test Piece
- Universal AC adapter
- US, EU, UK , JP plugs adapter
- Wrist strap
- Instruction manual
- Quick Reference Guide
- Carry Bag



PD240 Set



PD240 Set inside the carry bag



HHMD Configuration tool

APPLICATION

- Airports
- Correctional Facilities
- Law Enforcement
- Government Buildings
- Nuclear Facilities
- Loss Prevention
- Public Events
- Schools Security