


# FUTUREPATH FLEX

www.duraline.com



Customer Service  
800-847-7661

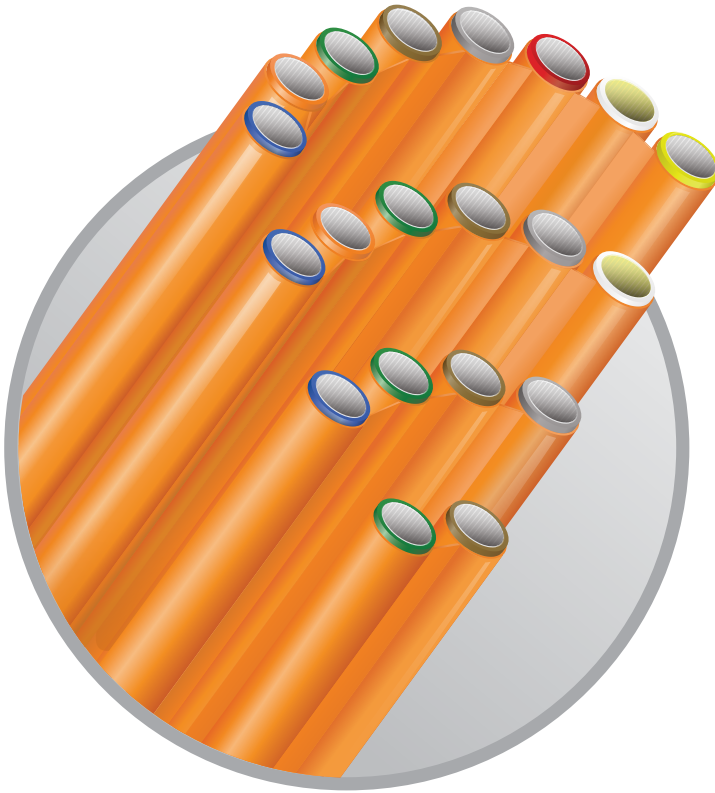

## FEATURES:

- MicroDucts joined by a thin web of HDPE, allowing for easy separation and routing of individual ducts  
Configurations: 8-way, 6-way, 4-way or 2-way
- Flat Shape allows installation in narrow slits or saw cuts or it can be direct buried (traditional trenching) or horizontally drilled (bored) into place
- Can be placed vertically, horizontally, or rolled into a round shape for vibratory plow or directional drilling
- Ideal for Micro-Trenching, resulting in reduced soil removal and impact to the right-of-way.
- FuturePath is designed for installation using the same tools and equipment that are used for traditional conduit or innerduct. No special tools or equipment are required.
- Multiple pathways in place for Future growth.

## INSTALLATION APPLICATION:

Direct Burial, Saw Cuts Plowing

## MARKET APPLICATION:



## COLOR:



## OPTIONS:

### FOOTAGE MARKINGS

Sequential foot or meter markings. Custom print streams available.

### SILICORE™



SILICORE is co-extruded with the tough HDPE jacket creating a super, slick permanent lining. SILICORE lined ducts allow for higher speed cable jetting and longer cable pulls.

### INTERNAL RIBS



Smooth or Straight Ribs are available with FuturePath. Options vary by MicroDuct Size.

# FUTUREPATH FLEX 2-WAY

www.duraline.com



Customer Service  
800-847-7661

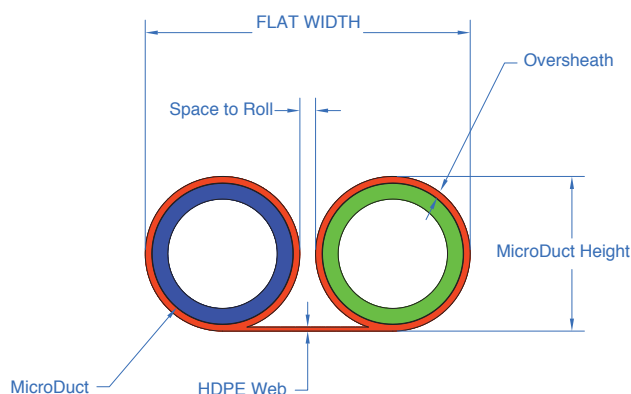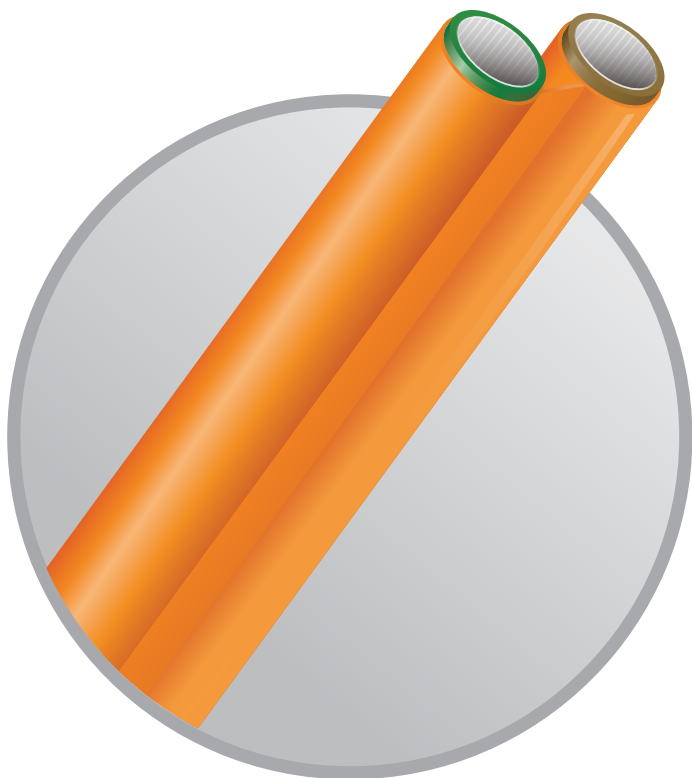

## 18mm/15mm 2-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.770	1.630	0.165	12	19		✓

## 18mm/14mm 2-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.770	1.637	0.225	12	19	1272	✓

## 12.7mm/10mm 2-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.574	1.273	0.117	10	17	600 lbs	✓



\* When Pulled in Round Form



Customer Service • 800-847-7661

# FUTUREPATH FLEX 4-WAY

www.duraline.com



Customer Service  
800-847-7661

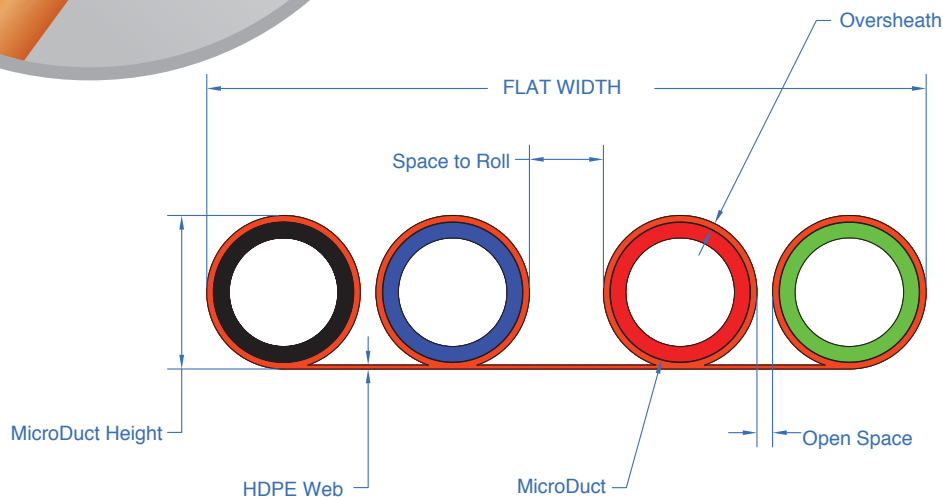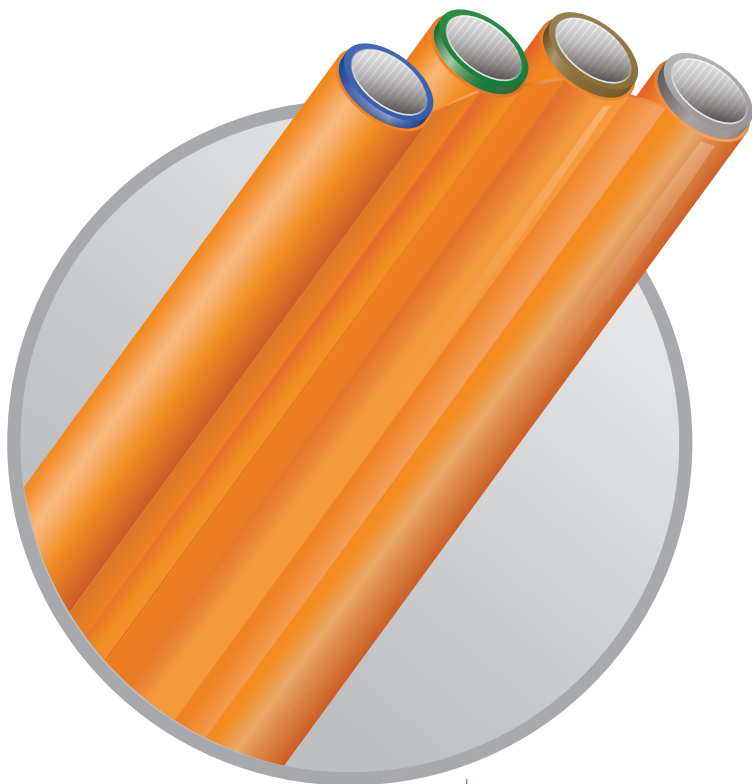

## 18mm/15mm 4-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.770	3.340	0.337	12	19		✓

## 18mm/14mm 4-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.770	3.649	0.460	12	19	2564	✓

## 12.7mm/10mm 4-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.574	2.546	0.237	10	17	1,300 lbs	✓



\* When Pulled in Round Form



Customer Service • 800-847-7661

# FUTUREPATH FLEX 6-WAY

www.duraline.com



Customer Service  
800-847-7661

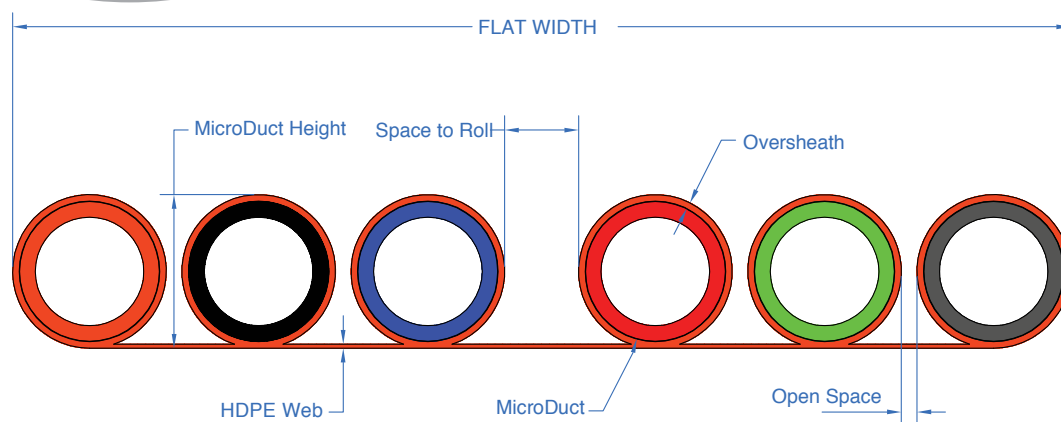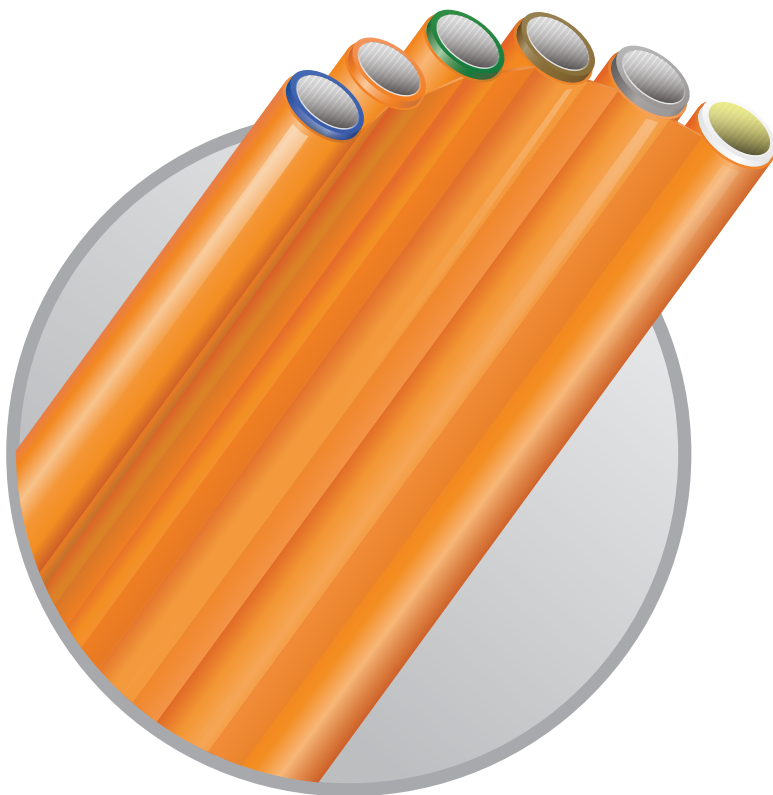

## 18mm/15mm 6-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.770	5.365	0.515	12	19		✓

## 18mm/14mm 6-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.770	5.365	0.693	12	19	3908	✓

## 12.7mm/10mm 6-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.574	3.819	0.358	10	17	1,900 lbs	✓



\* When Pulled in Round Form



Customer Service • 800-847-7661

# FUTUREPATH FLEX 8-WAY

www.duraline.com



Customer Service  
800-847-7661

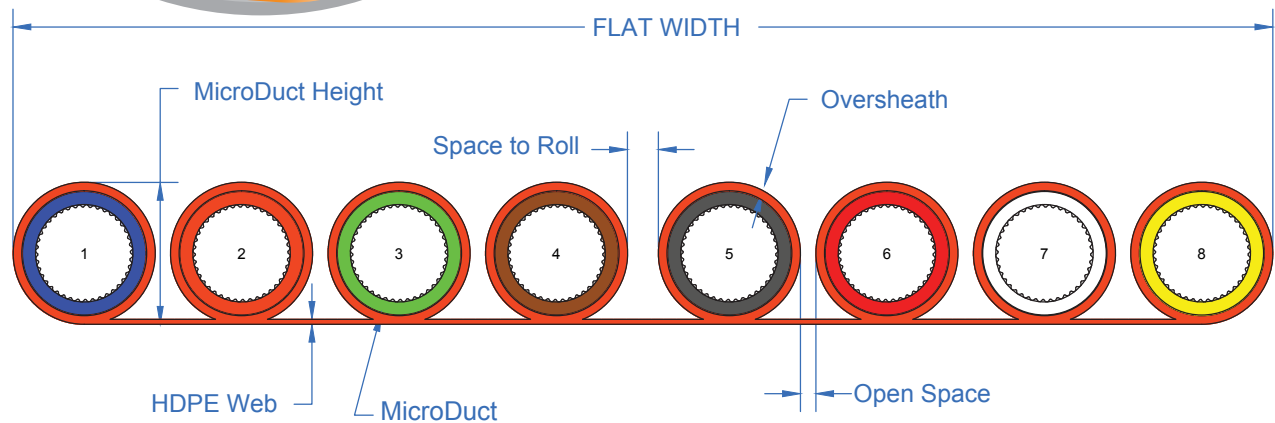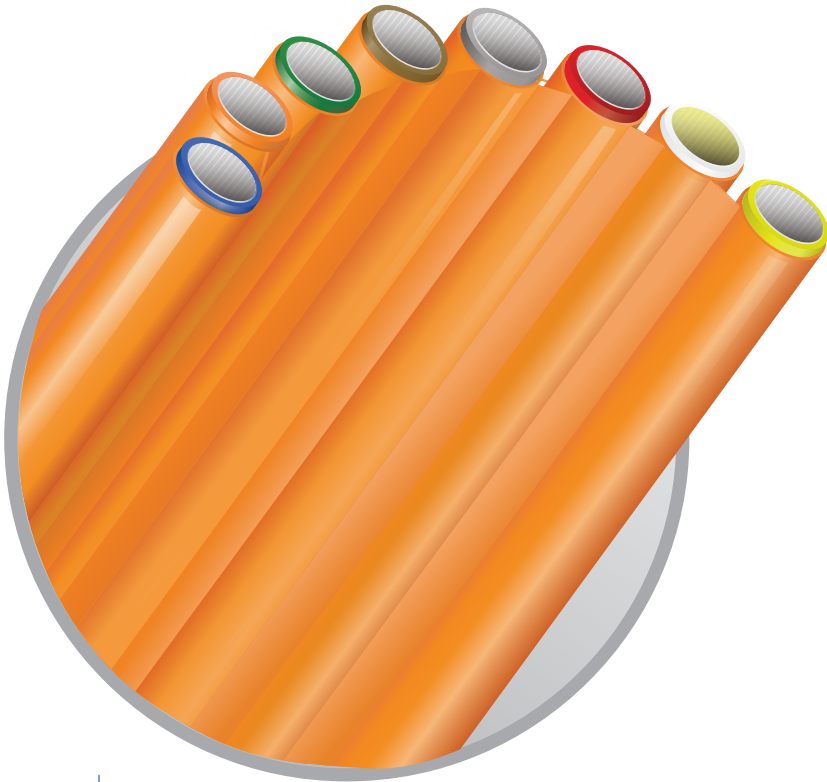

## 12.7mm/10mm 8-way

MicroDuct + Sheath Height (in.)	Flat Width (in.)	Total Weight (#/ft.)	Bend Radius Static	Bend Radius Dynamic	Tensile Strength* 75%	HDPE
0.574	5.092	0.478	10	17	2,600 lbs	✓