

ULTRA-LITE COVER VAULT SYSTEM

CONNECT
Ultra-Lite

Connect's line of Ultra-Lite vault covers are a superior alternative to traditional HDPE plastic, cast iron or polymer concrete vault covers on the market today.

The innovative material and structure offers over 50% weight reduction versus concrete. The Ultra-Lite covers conform to ANSI/SCTE 77 2010 Tier22 Class and is suitable for driveway, parking lot, and off-roadway applications subject to occasional non-deliberate vehicular traffic.



Ultra-Lite cover
(right half)

When partnered with the Oldcastle vaults, the Ultra-Lite system is easily installed while the cover's two piece design (24x36 is a once piece design) can easily be removed/installed by a single technician. The Ultra-Lite covers have an area for an engravable logo plate offering the client the ability to have their company logo or location visible.

FEATURES

- T-Cover design provides easy access all year-round while preventing material from entering vault body
- Material is unaffected by freeze or thaw
- 2-Piece cover – each side has 3 lifting hooks for removal options
- LOGO plate – can be engraved
- Available in Green (STOCKING) or Gray
- Designed with Non-Slip Checker plate pattern
- Cover & Vaults are supplied with Captive Bolt System & Self Guiding Bolt plates
- Available accessories: Grounding options, Tracer Connectivity & Marker Locate Discs



30" W x 48" L x 24"D Synertech
Polymer Concrete Vault with the 30x48
Ultra-Lite Grey Cover installed.

SPECIFICATIONS

Dimensions	Cover Weight	18"D Vault Body Weight	24"D Vault Body Weight	36"D Vault B Weight
24" x 36" Coming soon!	27kg (67lbs)	Coming Soon	36kgs (79lbs)	Coming Soon
30" x 48"	48kg (106lbs)	50kgs (112lbs)	57kgs (126lbs)	67kgs (147lbs)
36" x 60"	79kg (174lbs)	N/A	86kgs (190lbs)	100kgs (222lbs)
Load Rating: Tier 22 For use in non-vehicular traffic situations only. Weights and dimensions may vary slightly. Actual load rating is determined by the box and cover combination				



36" W x 60" L x 36"D Synertech
Polymer Concrete Vault with the 36x60
Ultra-Lite Green Cover installed.

CONNECT
telecommunications solutions inc.


650 Rupert Street | Unit #6 | Waterloo ON | N2V 2R8
Phone: 519.748.4411 | 1-877-900-7996 | fax: 519.748.0466
customerservice@connect-telcom.com

www.connect-telcom.com

ULTRA-LITE COVER VAULT SYSTEM

OLDCASTLE™ VAULT BODY SPECIFICATIONS

	2436	3048	3660
Material:	Composite Polyolefin Blend	DuoMold Composite	DuoMold Composite
Model:	24" w x 36" l	30" w x 48" l	36" w x 60" l
Weight:	18" Depth: TBD 24" Depth: 79 lbs 36" Depth: TBD lbs	18" Depth: 112 lbs 24" Depth: 126 lbs 36" Depth: 147 lbs	24" Depth: 190 lbs 36" Depth: 222 lbs
Wall Type:	Straight	Straight	Straight
Performance:	ANSI/SCTE-77 Tier 22, WUC 3.6, ASTM C857 A-16 Bodies are NOT stackable	ANSI/SCTE-77 Tier 22, WUC 3.6, ASTM C857 A-16 Bodies are stackable to depths of: 36", 42", 48", 60", 72". Stacked bodies are not rated.	ANSI/SCTE-77 Tier 22, WUC 3.6, ASTM C857 A-16 Bodies are stackable to depths of: 48", 60", 72". Stacked bodies are not rated.

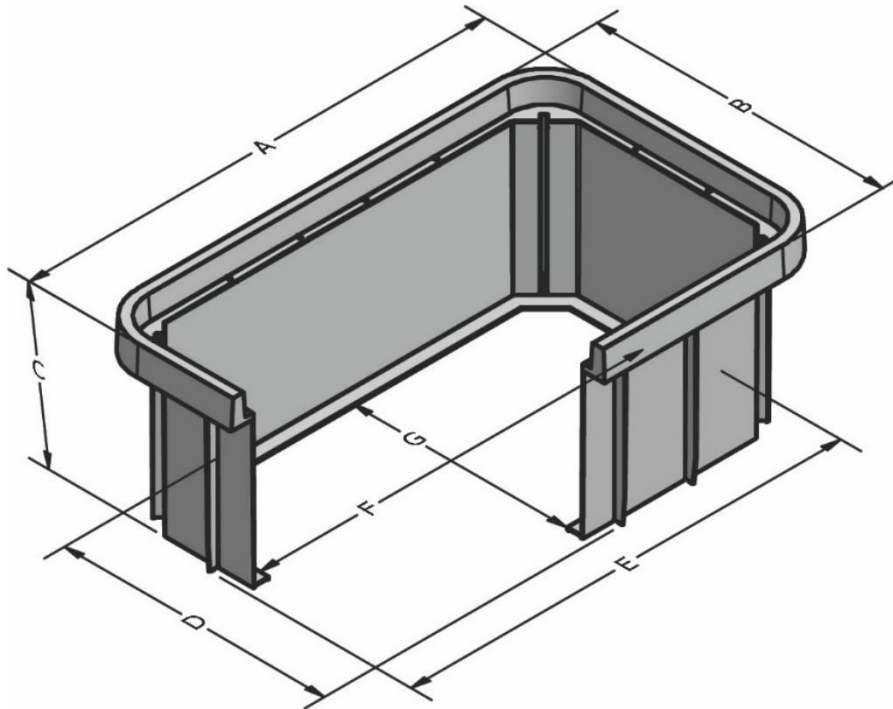

SIZE	A	B	C	D	E	F	G
2436-24	28 5/16	39 15/16	24	-	-	-	-
3048-18	50-1/8	32-5/8	18	30-5/8	48-1/8	41-3/4	24-1/4
3048-24	50-1/8	32-5/8	24	30-5/8	48-1/8	41-3/4	24-1/4
3048-36	50-1/8	32-5/8	36	30-5/8	48-1/8	41-3/4	24-1/4
3660-24	63	39-5/8	24	36-1/4	59-5/8	52-3/4	29-3/8
3660-36	63	39-5/8	36	36-1/4	59-5/8	52-3/4	29-3/8