

SPECIFICATION SHEET: Riverbed® Steelhead® Product Family

Model Specifications: Riverbed Steelhead xx50 Series Appliances

Steelhead Appliances are available in four different models to suit the needs of any office.

	Small Office			Mid-Size Office					Large Office or Data Center	
Model	250 Series			550 Series		1050 Series			2050 Series	
Configurations	L	M	H	M	H	L	M	H	M	H
Profile	Desktop					1U			1U	
WAN Capacity ¹	1 Mbps	1 Mbps	1 Mbps	2 Mbps	2 Mbps	6 Mbps	6 Mbps	10 Mbps	20 Mbps	45 Mbps
Optimized TCP Connections ²	30	125	200	300	600	800	1,300	2,300	4,000	6,000
Raw Capacity	120 GB	120 GB	120 GB	120 GB	120 GB	250 GB	250 GB	500 GB	1 TB	1 TB
Data Store Capacity	40 GB	40 GB	40 GB	80 GB	80 GB	100 GB	100 GB	200 GB	400 GB	400 GB
PFS Support	-	-	-	✓	✓	✓	✓	✓	✓	✓
RSP Support	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
RAID	-					-			✓	✓
Hot Swappable Disks	-					1	1	2	4	4
RAM	1 GB			2 GB			4 GB		6 GB	
Configurable Slots (PCI-e)*	-					1			1	
Onboard Bypass ports (Cu)	2					4			4	
Max # of Bypass Ports	2					8			8	

*Option Bypass cards- Dual/ Quad, Fiber/Copper GbE

Power & Physical Specifications

	Small Office			Mid-Size Office					Large Office or Data Center	
Model	250 Series			550 Series		1050 Series			2050 Series	
Configurations	L	M	H	M	H	L	M	H	M	H
Dual Power Supplies	-			-		(Optional)			✓	
Power [Watts] (Typical) ³	62.5			66.5		138		151	197	
BTU	213			227		138		151	197	
Temperature	10 - 40 deg C / 50 - 95 deg F (Operating) -40 - 65 deg C / -40 - 149 deg F (Storage)					10 - 40 deg C / 50 - 95 deg F (Operating) -40 - 65 deg C / -40 - 149 deg F (Storage)				
Relative Humidity ⁴	20% - 80% non-condensing (Operating) 5% - 95% non-condensing (Storage)									
Operating Acoustic Noise	45 dBA Sound Pressure (Typical)					74 dBA Sound Pressure (Typical)				
System Dimensions (LxHxW)	12 x 7.1 x 1.65 in 304.8 x 180.3 x 42 mm					25.4 x 17.2 x 1.71 in 645.4 x 436 x 43.5 mm				
Packaging Dimensions	24.5 x 12 x 4 in 622 x 305 x 102 mm					33.6 x 22.9 x 8.6 854 x 582 x 219				
Max Weight (without packaging)	4lbs 12oz/2.15 Kg					31 lbs/14.1 Kg				
Rail Information	Mounting ears included. Orderable part RMK-001					Mounting rail kit included. Orderable part RMK-002				

¹Inbound (WAN to LAN) Steelhead capacity is unrestricted; outbound WAN capacity can be expected up to the amount listed

²TCP Connections can be expected up to the amount listed

³Typical power ratings @ 110V

⁴Operating altitude up to 10,000 feet

The availability, export or re-export of these products or specific features are subject to the export laws and regulations of the U.S. and the laws and regulations of any applicable foreign agency or authority.

System Requirements: Steelhead Mobile

Operating System	Windows 2000 SP4, XP SP2 (32 bit versions only), Vista (32 bit versions only)
CPU	Celeron 1.5 GHz
Memory	512 MB
Disk Store	1 GB free disk space (min. required)
Steelhead Appliance*	Required
Steelhead Mobile Controller (SMC)	Required

Software Specifications: Steelhead Mobile

Steelhead Mobile software optimizes application performance over the WAN for the mobile workforce.

Concurrent Clients Supported per SMC	2000
Concurrent Clients Supported with SMC Cluster*	n x 2000
VPN Compatibility*	Cisco, Nortel, Juniper, Microsoft, OpenVPN
Wireless PC Card Compatibility*	Verizon, AT&T, Sprint


*At least one Steelhead appliance is required running RiOS version 4.x or higher

*SMCs can operate in clustered mode to support additional Steelhead Mobile clients

*Partial listing. VPN compatibility may be impacted by vendor software version, client configuration, and other factors. Refer to detailed VPN specifications at www.riverbed.com/steelhead_mobile/vpn_specs/ for more information

*Partial listing. Wireless PC Card compatibility may be impacted dependent upon hardware and driver versions, bundled software, and other factors. Refer to detailed wireless specifications at www.riverbed.com/steelhead_mobile/wireless/ for more information

Typical Steelhead Deployment

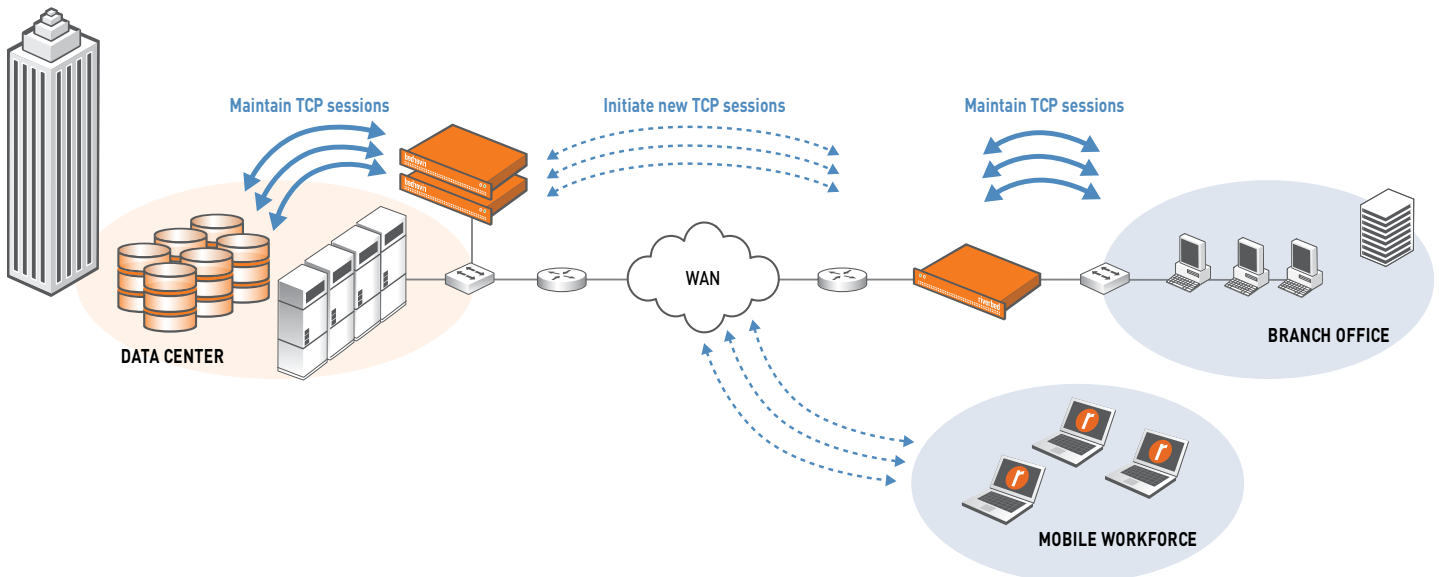

About Riverbed

Riverbed Technology is the performance leader in wide-area data services (WDS) solutions for companies worldwide. By enabling application performance over the wide area network (WAN) that is orders of magnitude faster than what users experience ordinarily, Riverbed is changing the way people work, and enabling a distributed workforce that can collaborate as if they were local. Additional information about Riverbed (Nasdaq: RVBD) is available at www.riverbed.com.

Riverbed Technology, Inc.
199 Fremont Street
San Francisco, CA 94105
Tel: +1 415 247 8800
Fax: +1 415 247 8801
www.riverbed.com

Riverbed Technology Ltd.
1, The Courtyard, Eastern Road
Bracknell
Berkshire RG12 2XB
United Kingdom
Tel: +44 1344 354 910

Riverbed Technology Pte. Ltd.
391A Orchard Road #22-06/10
Ngee Ann City Tower A
Singapore 238873
Tel: +65 6508-7400

Riverbed Technology K.K.
Shiba-Koen Plaza Building 9F
3-6-9, Shiba, Minato-ku
Tokyo, Japan 105-0014
Tel: +81 3 5419 1990



WAN Optimization - Riverbed RiOS 3.0

© 2008 Riverbed Technology, Inc. All rights reserved. Portions of Riverbed's products are protected under Riverbed patents, as well as patents pending. Riverbed Technology, Riverbed, RiOS, Steelhead, Interceptor, and the Riverbed logo are trademarks or registered trademarks of Riverbed Technology, Inc. SP-SHF071608