




Grille Great

Felt Grille



The best of both worlds: the beauty of Sonus Wood with the functionality of Felt. Grille Great was specifically designed for gridded ceilings and walls. Installing in just minutes, our Feltware system for ceilings is a 100% integrated Felt installation, while walls uses Feltware to z-bar. Offered in 4 standard wood species (and all 16 colors in our portfolio), Grille Great easily waterfalls from ceiling to floor.

Specifying Acoustics never Felt better.

Bringing our legendary innovation, attention to detail, speed, service, and value to PET felt.

Your Products & Our Purpose

Craft purposeful and beautiful acoustically absorbent products that help designers and builders easily create spaces that enable people to connect and be at their best.



UNMATCHED
PRODUCT
BREADTH

Made in the USA



At the foothills of the
Rocky Mountains

VACU-
BOND®

FOR SMOOTHER SURFACES
AND CLEANER CORNERS

2X

FASTER THAN
THE COMPETITION



START TO FINISH
UP-TO-THE-SECOND
ORDER TRANSPARENCY

Specifications

Product Name	Grille Great
Content	100% Polyester (PET) with a minimum of 60% recycled content
Felt Thickness	12mm
Size	24" x 48" x 5" and 24" x 24" x 5"
Weight	1.9/lbs per sq ft
Edge Options	Exposed felt
Sound Performance	ASTM C423-17: Wall NRC = 1.05, Ceiling NRC = 1.03
Fire Performance	Product made from Class A PET felt material tested under ASTM-84
Variations	Sonus Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.
Maintenance	Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.
Warranty	10 years
Unit of Sale	Per Unit

Price



Snap the QR Code or visit sonusna.com to see pricing.



Sonus is the only manufacturer to have published universal pricing because:

- 1) We got nothing to hide.
- 2) We are here for *you*: faster, easier, straightforward.



Sonus creates the perfect experience for each person in any moment.

Design & Installation

Feltware Wall

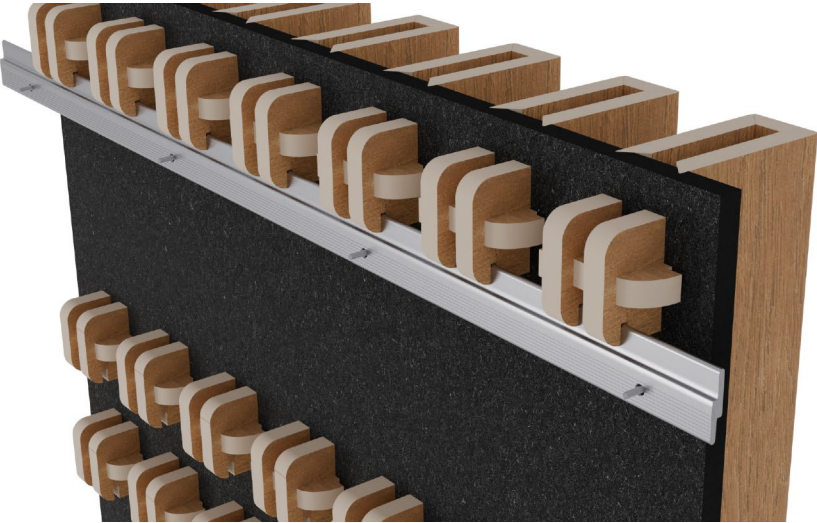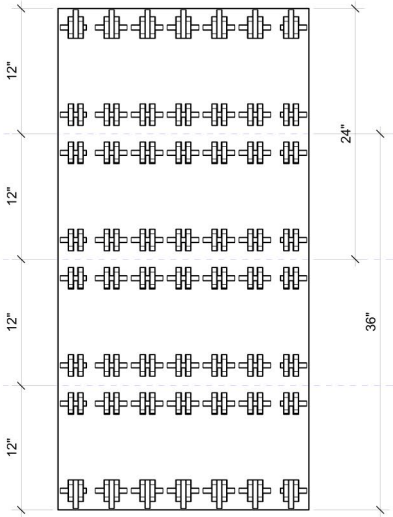


Feltware Ceiling

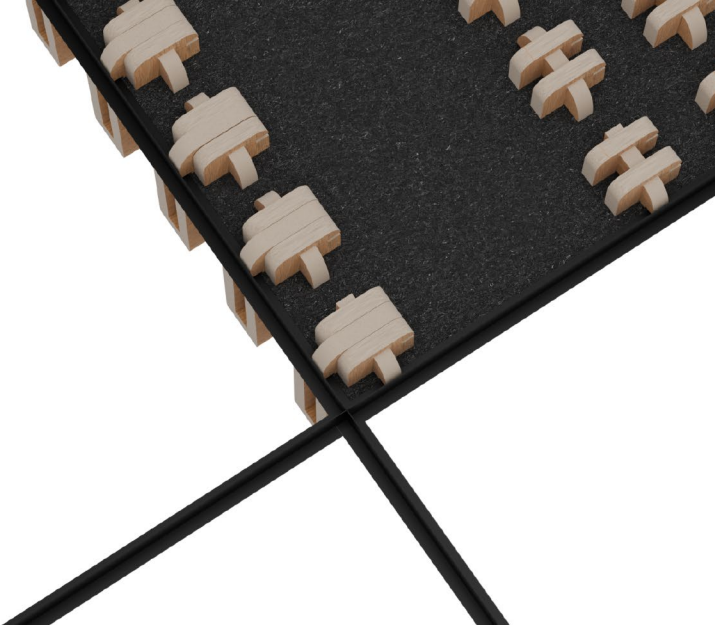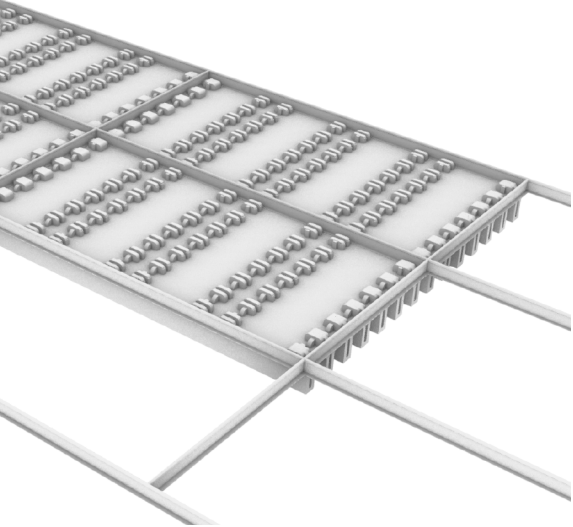

Feltware makes installation 100% pain-free. Feltware ceiling snaps to grid and Feltware wall slides on to Z bar, cutting labor time significantly, saving everyone time and money.


Colors

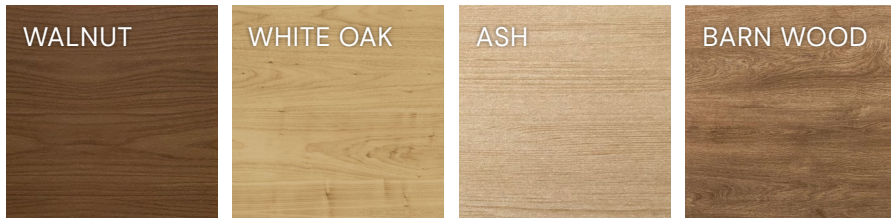

Test Results

Wall

Absorption Coefficiency vs. Freq (Hz)

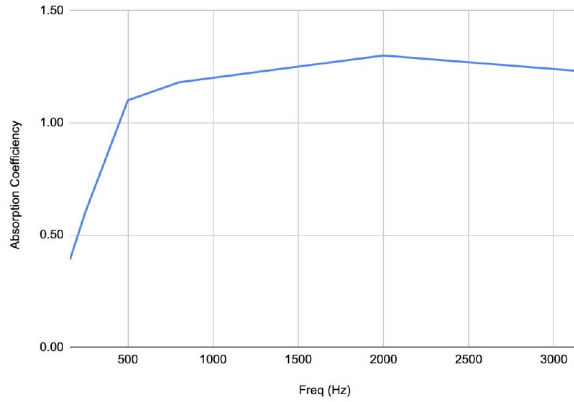


Freq (Hz)	Absorption Coefficiency
160	0.39
250	0.60
500	1.10
800	1.18
1000	1.20
2000	1.30
3150	1.23
NRC	1.05

The Noise Reduction Coefficiency (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250,500, 1250 & 2000 Hz).

ASTM C 423-17: Type F20 Mounting - Tested specimen mounted with Z bar and designed airspace behind it to simulate a standard wall installation.

Ceiling

Absorption Coefficiency vs. Freq (Hz)

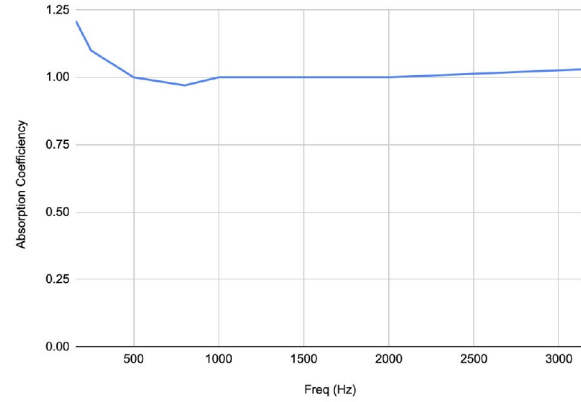

Freq (Hz)	Absorption Coefficiency
160	1.21
250	1.10
500	1.00
800	0.97
1000	1.00
2000	1.00
3150	1.03
NRC	1.03

The Noise Reduction Coefficiency (NRC) is calculated as the arithmetic average of the absorption coefficients in the shaded bands only (250,500, 1250 & 2000 Hz).

ASTM C 423-17: Type E400 Mounting - Tested specimen mounted with a standard plenum airspace to simulate a typical ceiling grid installation.