

VOK-CHEM

TECHNICAL DATA SHEET




PROTECTIVE COVERALL TYPE 5-B/6-B

MY 7315 is designed to protect workers from hazardous dusts (Type 5) and light liquid splashes (Type 6). These coveralls are intended to be worn over underclothing and are designed to protect against incendiary electrostatic discharge if properly grounded.

KEY FEATURES

- Provides substantial protection against dust and light liquid splashes.
- Complies with EN 14126 and offers protection against certain biohazards.
- Breathable microporous laminate fabric reduces the risk of heat stress.
- Skin-friendly nonwoven material inside.
- Elasticated waist, ankles and wrists provide convenience and freedom of movement.
- Front zipper with storm flap for comfortable fitting and added protection.
- Antistatically treated.
- Latex and silicon free.

APPROVALS AND PROTECTION

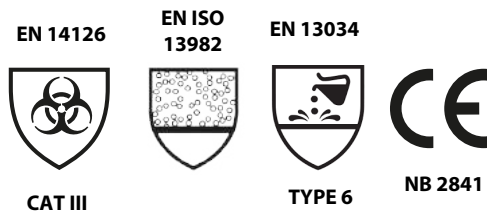

VOK-CHEM fulfils the requirements for Category III PPE.
CE approved under Personal Protective Equipment
Regulation (EU) 2016/425.

EN ISO 13688:2013

EN ISO 13982-1:2004+A1:2010 (Type 5)

EN 13034:2005+A1:2009 (Type 6)

EN 14126:2003/AC:2004 (Type 5-B & Type 6-B)

EN 1149-5

-V



APPLICATIONS

Typical applications include asbestos inspection, coal dust cleaning in power plants, metal polishing, light-duty building cleaning, machine or vehicle maintenance, paint spraying, pharmaceutical, general industrial clean-up, insulation laying, woodworking, general powder handling and environmentally controlled cleanroom applications.


Size chart

SIZE	S	M	L	XL	2XL	3XL
HIGHT FROM SHOULDER	70	72	74	76	78	80
INNER LEG LENGTH	68	70	72	74	76	78
INSIDE LEG WIDTH	33	35	37	39	41	43
CHEST 1/2	120	124	128	132	140	148
FINISHED ZIPPER	75	75	75	75	75	75
TROTTER TIRE ON	18	20	22	22	22	22
TIRE STATIC	8	8	10	10	10	12
CUFF TIRE ON	15	15	16	18	19	20
CUFF STATIC	8	8	8	8	8	10
PAT EXLI 1/2	5	5	5	5	5	5
PAT SIZE ZIPPER	75	75	75	75	75	75
HOOD LENGTH	36	36	36	36	36	36
ALL LENGTH FROM SHOULDER	158	162	166	170	174	178

WARNINGS AND LIMITATIONS

Make sure that the product is suitable for the application and fitted correctly. Product must never be altered or modified. Final determination as to the suitability of these products for a particular situation is the employer's responsibility. For full protection, tape along length of storm flap; tape cuffs, ankles and hood to suitable, additional personal protective equipment. Electrostatic Dissipative(ESD) Protective clothing shall not be opened or removed whilst in presence of flammable or explosive atmospheres or while handling flammable or explosive substances. This information is subject to revision at any time. If you have questions you may contact Mayamed technical experts.

LIMITED USE

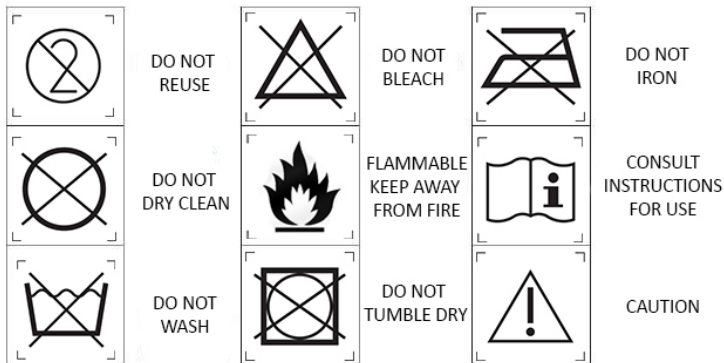

SIZE

Appropriate size garment should be selected to allow sufficient movement for the task whilst maintaining a secure fit.

MATERIALS

FABRIC	Microporous laminated PPSPB
WEIGHT	55 ± 5 g/m ²
ZIPPER	Polyester Braid
THREAD	Polyester

STORAGE AND DISPOSAL

- Store away from solvent vapors in a dry and clean place in its original packaging at -5 and +25°C.
- When removing contaminated clothing, care should be taken to ensure that the user is not contaminated with any hazardous materials. If the clothing is contaminated, decontamination procedures should be followed before removing the garment.
- Carefully use and dispose of contaminated clothing in accordance with applicable local regulations.
- The expected shelf life is three years from the date of production when stored as indicated.
- Do not use these products if they have surpassed the expiry date.