

TERRACLEAR

EQUIPMENT REQUIREMENTS

TerraClear works with most common equipment types provided they meet the minimum requirements.

Flow 18 GPM minimum

Hydraulic Flow

Pressure 2900 PSI minimum

Auxiliary System Pressure

Tipping Load 5600 lbs min.

100% of Rated Operating Capacity

Universal Mounting Plate




The TC80 Rock Picker

CONNECTIONS

TerraClear supplies connections (below) that correspond with the most common skid steers. TerraClear can also supply adapters to fit most other connections.

Pressure



Non-spill, Flush face Quick Coupling, 1/2" Coupler

For example: Parker
FEM-501-12F0-NL

Return



Non-spill, Flush face Quick Coupling, 1/2" Nipple

For example: Parker
FEM-502-12F0



SPECIFICATIONS

TerraClear TC80 Rock Picker

Depth: 45 inches

Height: 26 inches

Width: 78 inches

Weight: 1,600 pounds


Volume: .7 cubic yards

Distance between tines: 3"

TERRACLEAR

COMPATIBILITY

TerraClear works with most common equipment models that meet the minimum requirements.

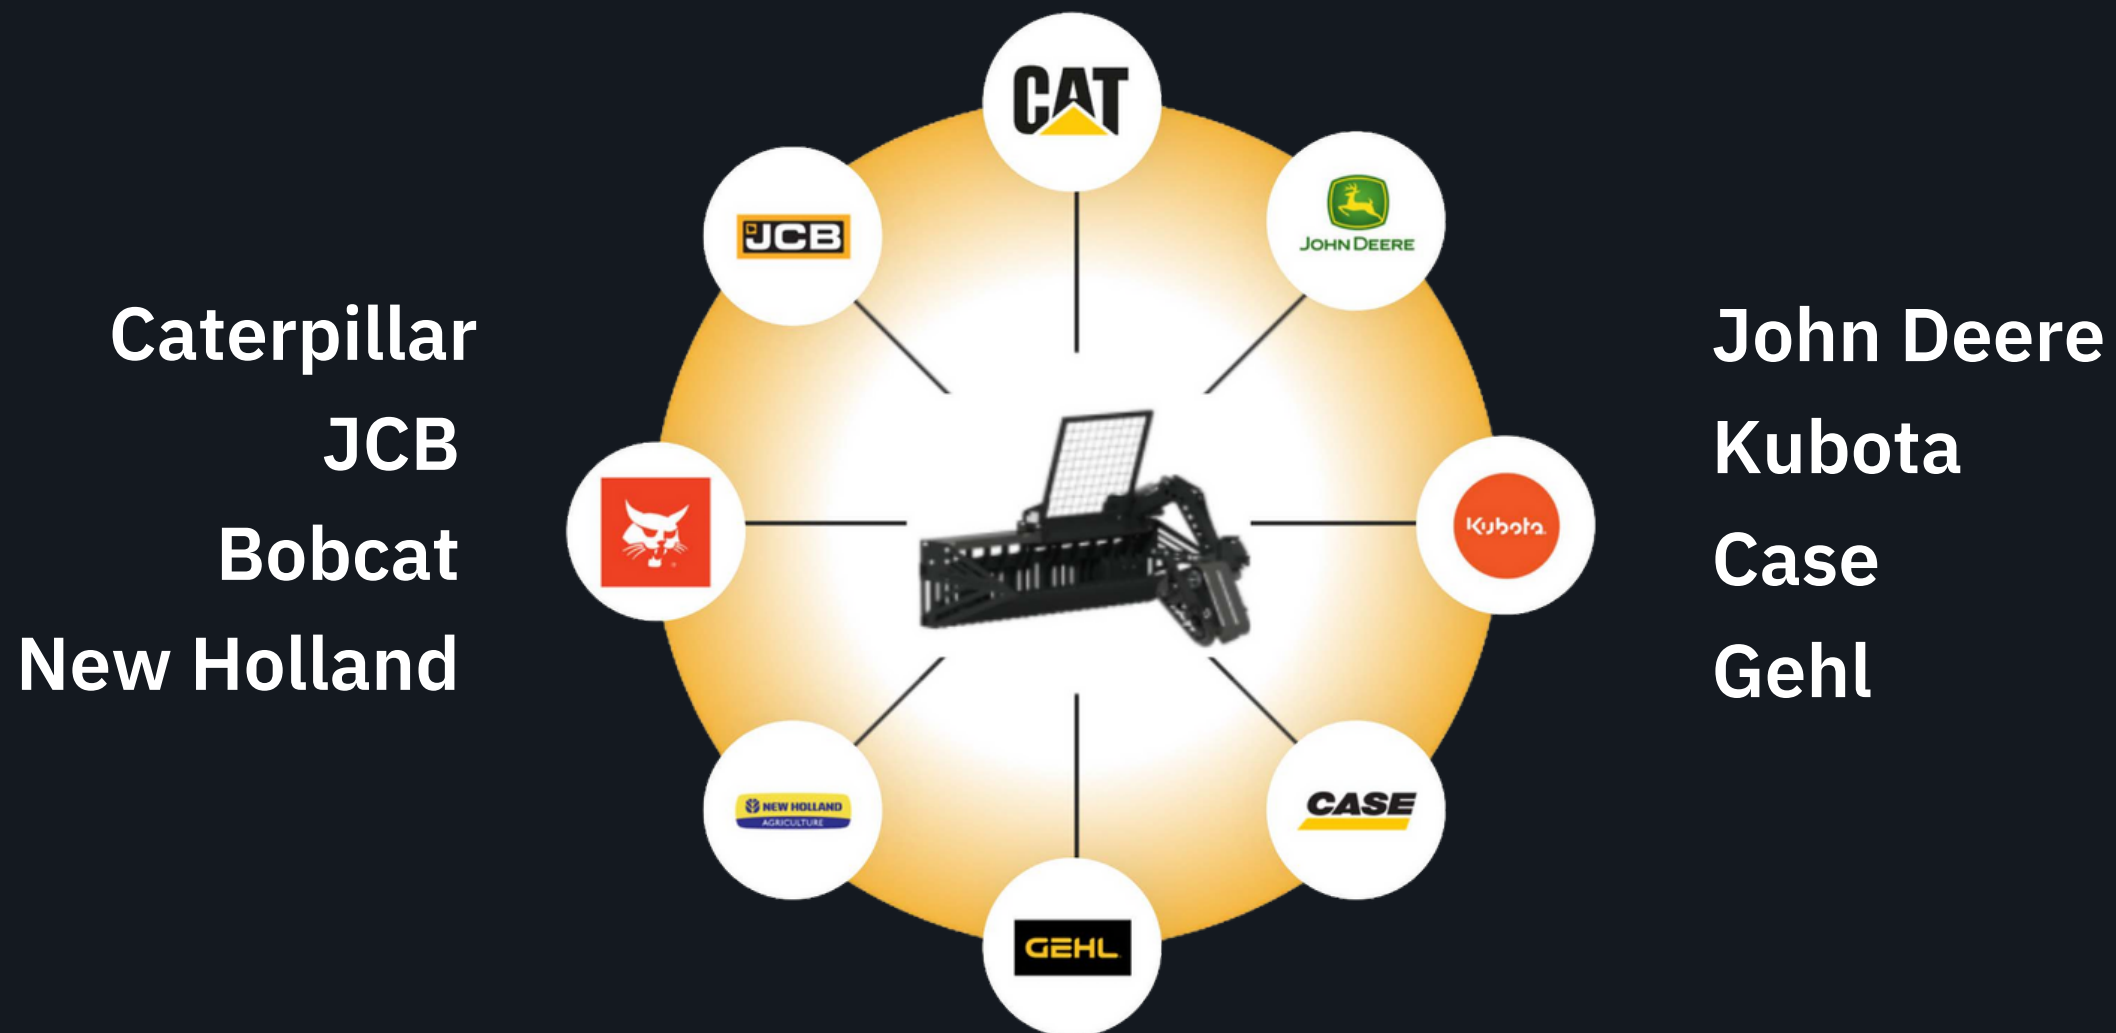

VERIFIED COMPATIBLE EQUIPMENT MODELS

The TC80 has verified compatibility with several of the most common tracked or wheeled equipment models.

Brand

Model Tracked/Wheeled



JOHN DEERE

325G or greater
330G or greater



C232 or greater
L328 or greater



TR310 or greater
SV280 or greater



257D or greater
272D or greater



T630 or greater
S740 or greater



Have more questions about compatibility? We're here to help. Call us on (425) 274-2905