



Case Former **CF-25**

High Performance - Case Erecting/Forming

The CF-25 is the latest in a series of industrial grade, high performance case erectors from Little David®. This case erector is designed to form and bottom-seal corrugated boxes at speeds up to 15 cases per minute.

Little David® delivers high-performance packaging equipment.

Little David® CF-25



Performance and Design Features:

- ▣ **Small Footprint-** Patented case flow technology allows the CF-25 to maintain it's versatility without compromising your floors pace.
- ▣ **Chain and Lug Drive-** Chain and Lug drive system ensures a square box is formed and eliminates box stalling and slipping seen in side-belt machines .
- ▣ **Reliable Case Transfer-**Improved case transfer system features upgraded vacuum system and (3) vacuum cups
- ▣ **Quick/Easy Changeover-** Load-on-the-fly/easy load hopper ensure box loading and changeover are simple and efficient.


CF-25

The Little David[®] CF-25 is an automatic system that erects and bottom seals corrugated cases at speeds from 10 to 15 cases per minute. The CF-25 case erecting solution is ideal for applications that require more throughput than manual case erecting can provide. This versatile system creates instant labor savings and increases production for a wide range of medium-speed applications.

Little David[®] Performance and Design Features:


- Erects and bottom seals up to 10 cpm (standard) and 15 cpm (high speed)
- Patented box flow process enables small footprint
- 2 minute case size changeover; requires no tools
- Chain and lug drive system ensures case is square during sealing and eliminates slipping and stalling seen in side-belt machines
- Interlocking safety gates restrict access to moving parts
- 150 case powered hopper
- Pneumatically folds flaps

Chain and Lug Drive System:

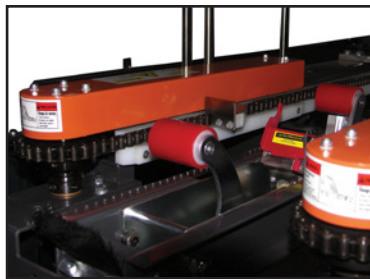

LITTLE DAVID 

Machine Dimensions:

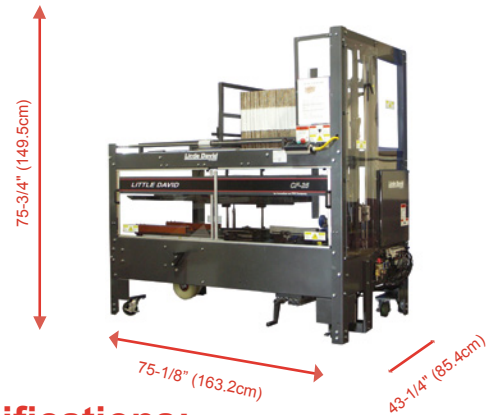

Specifications:

Power Requirements: 110 volts, 60 cycle, single phase

Air Requirements: 14 SCFM @ 85 psi

Production Speed: Standard: Up to 10 cases per minute. High Speed Option: Up to 15 cases per minute, depending on case size and corrugated quality.

Closure Material: Pressure Sensitive Tape

Weight: 1100 lbs. (258 kg.), uncrated

Case Capacity:

Length: 6" - 16"

Width: 6" - 14"

Height: 4" - 12"

Options of the CF-25:

- Casters
- Box Jam Warning
- Low Tape Warning
- Leg Extensions
- Low Hopper Warning
- Tape Detection
- Special Electronics
- Spare Parts Kit
- Stainless Steel
- Avail. in CE, NEMA 4
- Leveling Pads
- Air Dryer
- Mobile Control Station
- High Speed Upgrade

DISTRIBUTED & SUPPORTED by:



Telephone: 800-338-7837

Visit Our Website: www.inopakinc.com

Email us: sales@inopakinc.com

LOVESHAW
an ITW Company

2206 Easton Turnpike
P.O. Box 83
South Canaan, PA 18459
Tel: (800) 572-3434 Fax: (570) 937-3229
www.loveshaw.com

LOVESHAW Europe

A Division of ITW Ltd.

Unit 9 Brunel Gate,
West Portway Industrial Estate
Andover, Hampshire England SP 10 3 SL
Tel: (1264) 357511 Fax: (1264) 355964



©Lovesshaw, an ITW Company, 2010