

# Case Sealer

**Random Legend**

## Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of cases.



Little David delivers packaging equipment that works for you



Light touch roller switch in pack table for centering

### The Random offers:

- ☒ Light touch head paddle
- ☒ Patented leg extensions
- ☒ Interchangeable tape cartridges
- ☒ Patented safe mast trolley system
- ☒ Reliable operation
- ☒ Heavy duty steel construction
- ☒ Light touch roller switch

### The Random replaces:

- ☒ Expensive labor
- ☒ Hand taping boxes
- ☒ Unsafe machinery

**LITTLE DAVID**



[www.loveshaw.com](http://www.loveshaw.com)


Little David Random Legend



# Random Legend

## Dimensions:

### Random Legend:

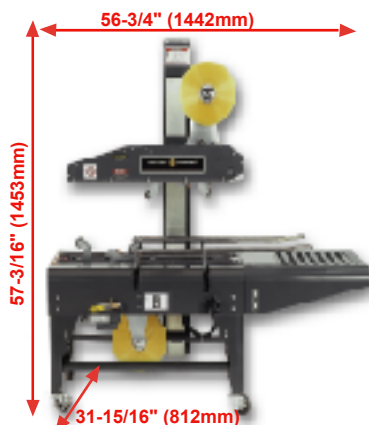

## Additional Case Sealer Models:

### Also Available LD-16A:

- Fully automatic case sealer
- Seals top and bottom of uniform box sizes



### Also Available LD-16R:

- Fully automatic case sealer
- Seals top and bottom of random box sizes



## Features of the Random Legend:

### Reliable Performance - Warranty:

- 1 Year All Components\*
- 2 Years Gear Reducer
- 3 Years Cartridge\*

\*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

### Flexible:

- Tapes boxes in a variety of sizes (see below)
- Converts from 2" to 3" wide tape

### Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system
- CaseLocker ST® tape cartridge requires no lubrication
- Front roller pack table

### Safe:

- Patented single mast design allows clear access
- Knife guard system of the CaseLocker ST® tape cartridge only allows the blade to be exposed only when the rollers have been depressed

## Specifications of the Random Legend:

### Power Requirements:

- 115 volts, single phase, 60 cycle  
(other voltage available, consult Loveshaw)

### Operating Speed:

- Continuous belt drive; 80' per minute (24.4 m/min.)  
(production rate depends on box size & operator dexterity)

### Weight:

- 275 lbs. (125 kg) uncrated

### Closure Material: (pressure sensitive tape)

- Width: 1-1/2" (38mm) to 2" (51mm)
- Roll size: up to 15" (381mm) diameter

### Case Capacity: (with 2" wide CaseLocker ST® Cartridge)

- |                        |                      |
|------------------------|----------------------|
| ■ Minimum:             | Maximum:             |
| Height: 4-1/2" (114mm) | Height: 24" (610mm)* |
| Width: 4-1/2" (114mm)  | Width: 22" (559mm)   |
| Length: 6-1/2" (165mm) | Length: infinite     |
- \*Conveyor height minimum is 22-1/4" (565mm)

## Options of the Random Legend:

- |                          |                                    |
|--------------------------|------------------------------------|
| ■ Casters                | ■ Leg adjustments                  |
| ■ Head limiter           | ■ High mast for box heights to 34" |
| ■ Pneumatic pass through | ■ Rear solid or roller pack table  |

DISTRIBUTED & SUPPORTED by:



Telephone: 800-338-7837

Visit Our Website: [www.inopakinc.com](http://www.inopakinc.com)

Email us: [sales@inopakinc.com](mailto:sales@inopakinc.com)

**LOVESHAW**

Route 296, Box 83  
South Canaan, PA 18459  
Tel: (570) 937-4921 Fax: (570) 937-3229  
(800) 572-3434

**LOVESHAW Europe**

Unit 9 Brunel Gate  
West Portway Industrial Estate  
Andover, Hampshire England SP 10 3 SL  
Tel: (1264) 357511 Fax: (1264) 355964



©Lovesshaw, 2004