

FLAT HEAD RESIN

RS250 is a flat head resin with an excellent label adaptability and less print energy. It is solvent and abrasion high resistant. Recommended to be used in very smooth papers and films.

PHYSICAL SPECIFICATIONS

INK RESIN FLAT HEAD

TOTAL THICKNESS 6.0 μm ± 0.5

BASE FILM Polyester film

FILM THICKNESS 4.5 µm


COLOR Black

PRINTING SPECIFICATIONS

MATERIAL TO PRINT smooth papers, synthetic materials (PP, PET, vinyl, polyethylene....)


USAGE CONDITIONS 5°C to 35°C, 45% to 85% relative humidity

WAREHOUSE CONDITIONS 5°C to 45°C, 20% to 85% relative humidity

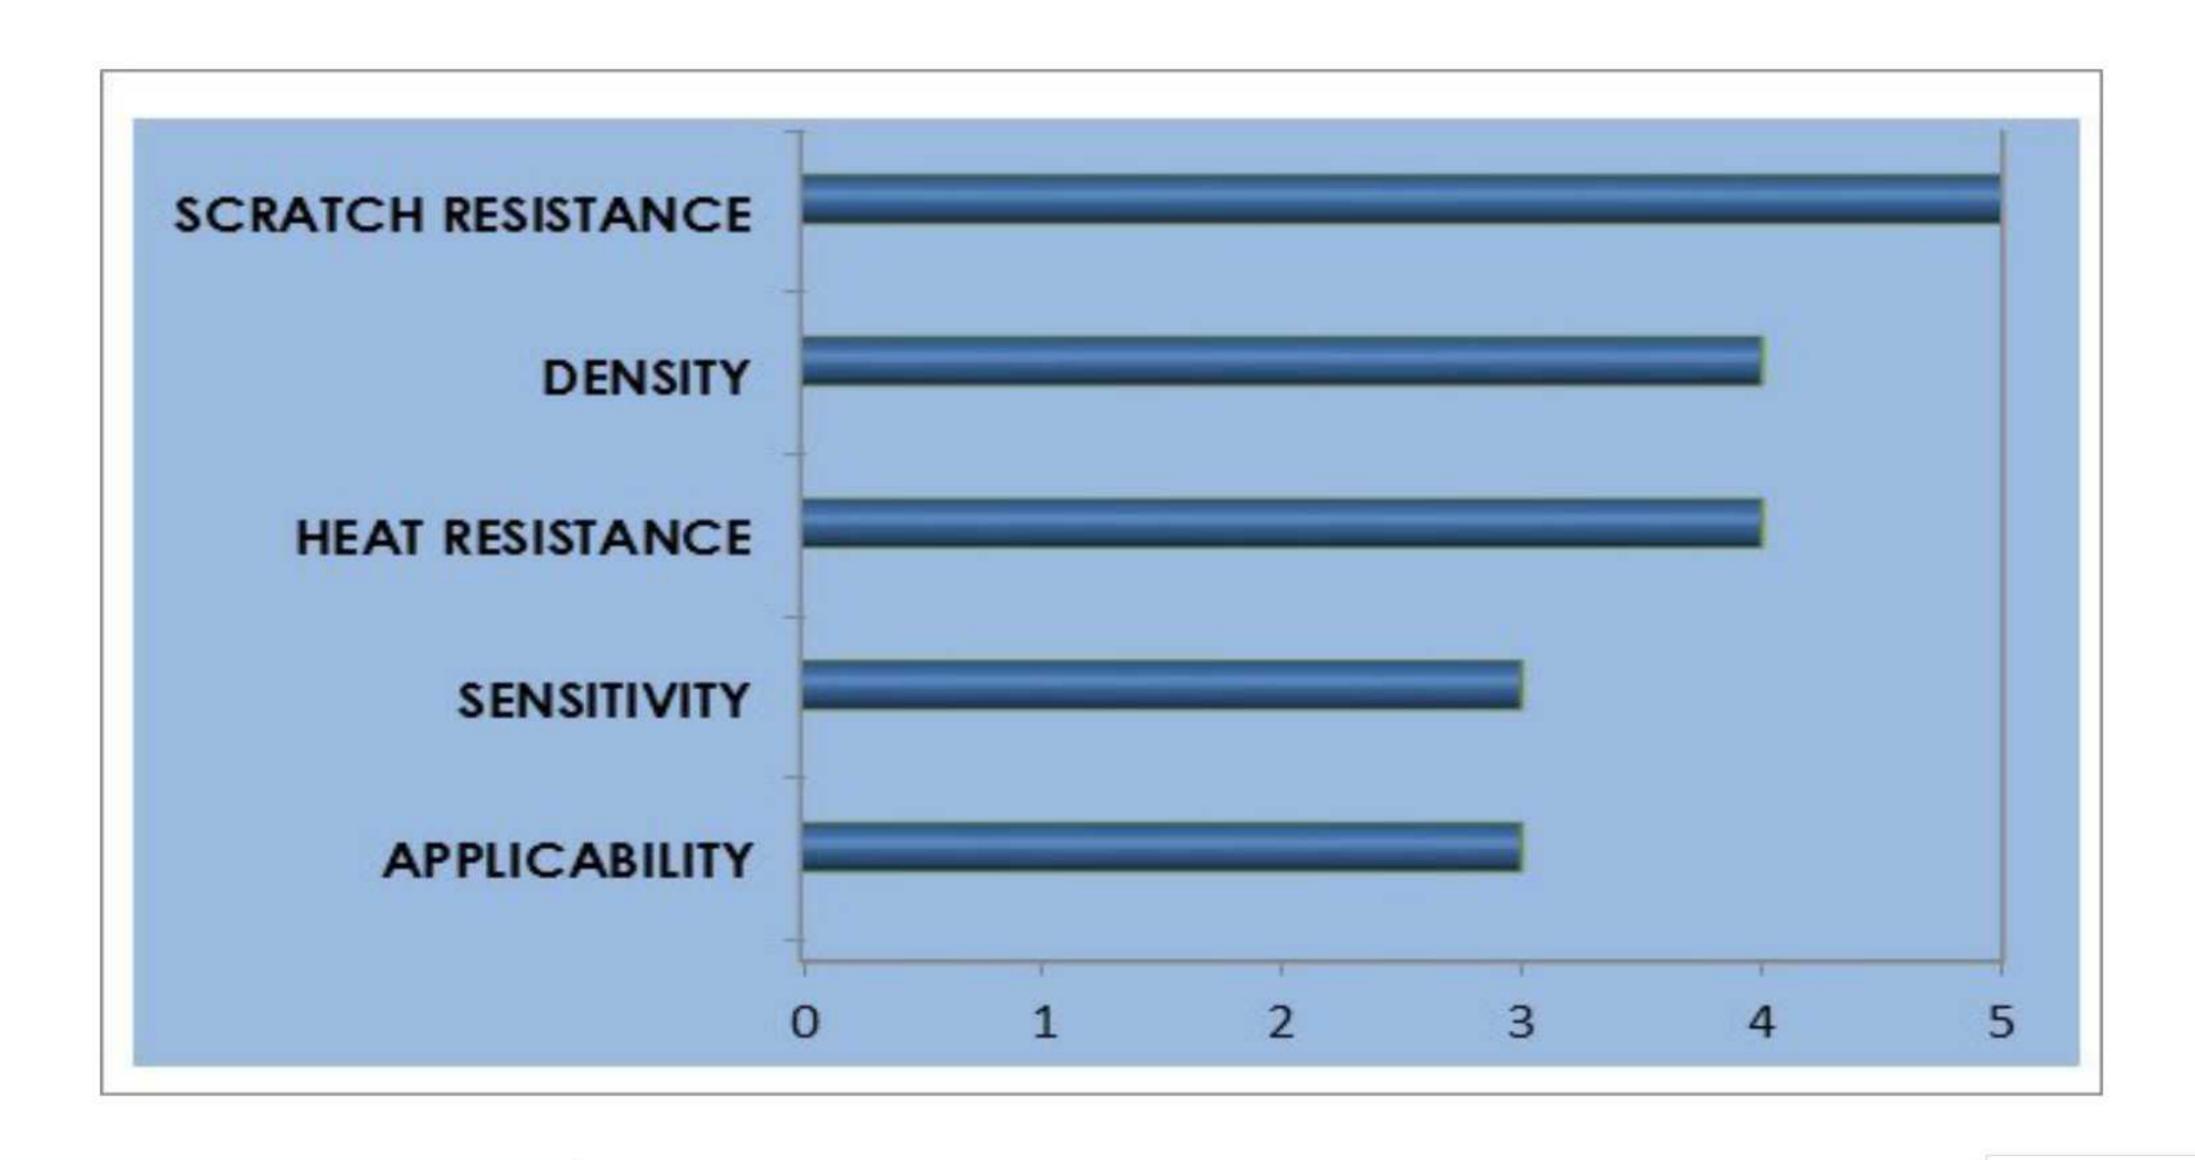

RS250 APPLICATIONS:



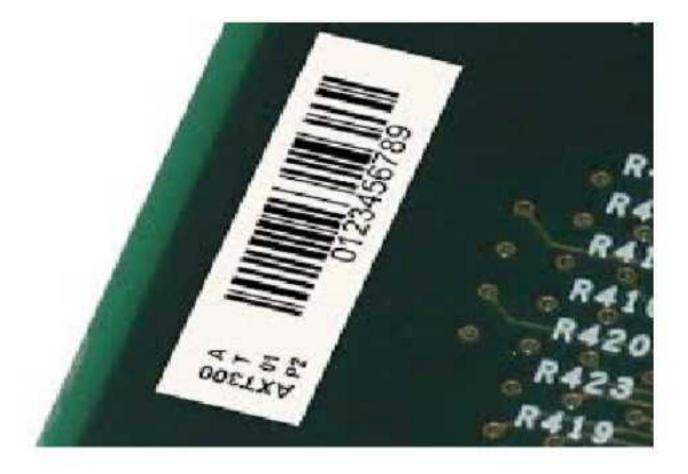



AUTOMOTIVE

ELECTRONICS

MEDICAL







CHEMICAL PRODUCTS

OUTDOOR LABELS

RETAIL





FOOD CONTACT
DIRECTIVE
(EC) No
10/2011
COMPLIANT