


Saarinen II

General

Wood	European Oak
Gradings	Prime/Bis Bis/Rustic A Rustic AB Rustic Art
Structure	Birch plywood
Finishing coat	Bleach
Finishing surface	Sanded

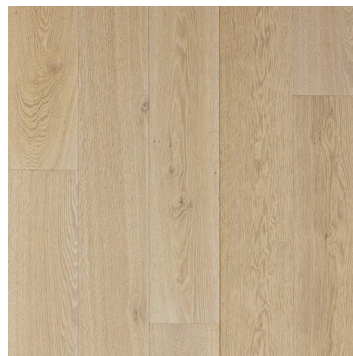

Saarinen II

Technical information

Valuation	En 14342
Flammability class	Dfl-s1
Underfloor heating	Yes
Thermal conductivity	0.17 W/mK
Moisture content	10 % (+/- 2%)

Dimensions

10/3	
Length	1500 - 2200 mm
Width	187 mm
Thickness	10 mm
Surface	3 mm
Joint	Micro V joint

12/4, 15/4, 20/6	
Length	1500 - 2500 mm
Width	160 - 260 mm
Thickness	12, 15, 20 mm
Surface	4, 4, 6 mm
Joint	Of choice

19/4	
Length	1500 - 2500 mm
Width	300 mm
Thickness	19 mm
Surface	4 mm
Joint	Of choice

Finishing of the sides and options

Micro V joint	Brushing
V joint 2 sides	Aged effect
V joint 4 sides	Band saw effect
U joint 1.5 x 3 mm	Belgiqa scratch
Seams scratched by hand	Colouring U joints for dark colours

Extra information

Joining method	Tongue and groove
Sanding	Yes (1 mm per sanding)

Maintenance products: Water and soap, parquet soap can be used after bleaching

At the time of delivery this recently produced parquet will always be slightly darker than the colour you've seen on the sample due to the use of chemical products. The colour of the sample has been finished months ago and has had more time to bleach. The new parquet will need the same amount of time to reach the exact same colour of the sample.

Belgiqa