


Saarinen IV

General

Wood	European Oak
Gradings	Prime/Bis Bis/Rustic A Rustic AB Rustic Art
Structure	Birch plywood
Finishing coat	Oiled
Finishing surface	Sanded

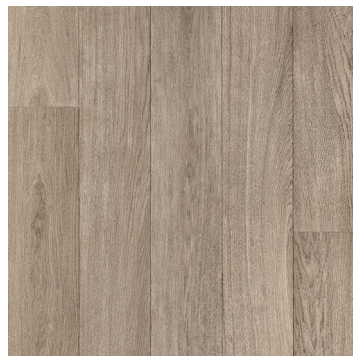

SAARINEN IV

Technical information

Valuation	En 14342
Flammability class	Dfl-s1
Underfloor heating	Yes
Thermal conductivity	0.17 W/mK
Moisture content	10 % (+/- 2%)

Dimensions

10/3	
Length	1500 - 2200 mm
Width	187 mm
Thickness	10 mm
Surface	3 mm
Joint	Micro V joint

12/4, 15/4, 20/6	
Length	1500 - 2500 mm
Width	160 - 260 mm
Thickness	12, 15, 20 mm
Surface	4, 4, 6 mm
Joint	Of choice

19/4	
Length	1500 - 2500 mm
Width	300 mm
Thickness	19 mm
Surface	4 mm
Joint	Of choice

Finishing of sides and options

Micro V joint	Brushing
V joint 2 sides	Aged effect
V joint 4 sides	Band saw effect
U joint 1.5 x 3 mm	Belgiqa scratch
Seams scratched by hand	Colouring U joints for dark colours

Extra information

Joining method	Tongue and groove
Sanding	Yes (1 mm per sanding)