

LED DIRECT INDIRECT DI2

THE POWER OF LIGHT
ILLUMADYNE

PROJECT NAME:

CATALOG #:

VOLTAGE:

WATTS:

FIXTURE TYPE:

CONTROLS TYPE:



HIGHLIGHTS

- 150 LPW
- > 80 CRI (90 CRI Available)
- Mid Power LED's Reduce Glare and Improve Visual Comfort
- Available with Standard 0-10VDC dimming
- Integral PIR & Microwave Sensor Available
- Lifetime - L70 >140,000 Hrs
- Limited 7-Year Warranty

CONSTRUCTION & MATERIALS

- All Aluminum Construction
- Lightweight design provides ease of installation
- Aircraft Cable Hanger Assembly
- Internal joiner plates for end-to-end configuration
- Suitable for Damp Location
- ETL Listed

LED SYSTEM

- Latest 3030 and 2835 mid-power LED's from Samsung
- Aluminum PCB's for the optimum in efficiency and thermal management.
- Over 130 LPW for system efficacy (Including Driver Loss)
- All drivers are equipped with short circuit and over temp protection.
- Built in 4KVA Surge Protection

ORDERING EXAMPLE: DI2 - X - XXXX - (XXX) - XX - XXX - [OPTIONS] - XX - XXX

ORDERING GUIDE

SERIES	LENGTH	POWER LEVEL	VOLTAGE	PROFILE	CRI/CCT
DI2	4 (4' Length)	BLANK (Normal Efficiency)	UNV (120-277V)	11 (1 Bar Down, 1 Bar Up)	835 80CRI 3500K
	8 (8' Length)	HE (High Efficiency)		12 (1 Bar Down, 2 Bar Up)	840 80CRI 4000K
					850 80CRI 5000K
					935 90CRI 3500K
					940 90CRI 4000K
					950 90CRI 5000K
Notes:	Notes:	Notes:	Notes:	Notes:	Notes:


OPTIONS	HOUSING	DOWN LIGHT LENSING
DOBS (Dimming Hi/Lo PIR Sensor) DOBSL (Low Mount Dimming Hi/Lo PIR Sensor) DOBNLS (Bluetooth® Network Sensor) BBU (4w Battery Backup)	BK Black WH White CP Custom Paint	DLA (Diffuse Lens Acrylic)
Notes:	Notes:	Notes:



LED DIRECT INDIRECT D12

FIXTURE DETAILS

FIXTURE	4'
Length	48.20"
Width	7.70"
Height	2.40"

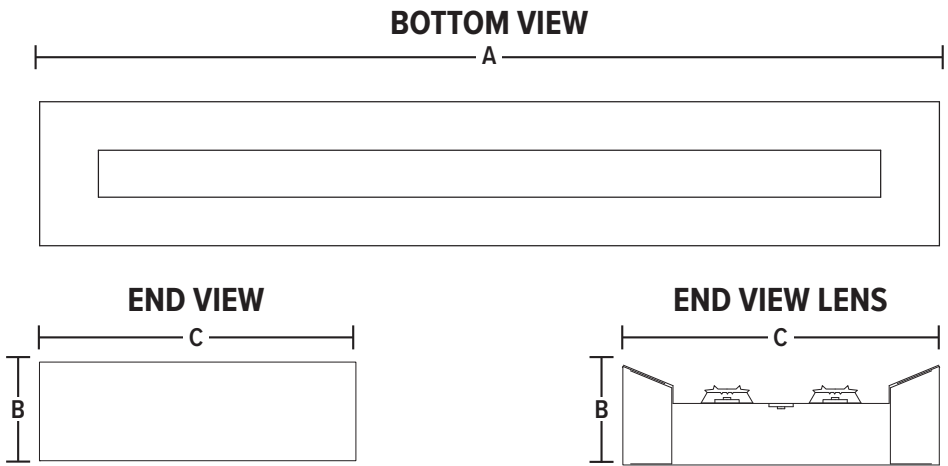

PHOTOMETRY

