

**V-TOP / POST TOP AREA LUMINAIRE**



**TECHNICAL DATA**

• Luminaire source	LED COB
• Luminaire system wattage*	40W, 60W
• Luminaire luminous flux*	3000lm, 4200lm
• Luminaire efficacy (avg.)	70lm/W (5000K)
• Correlated colour temperature*	5000K, other CCT on request
• Colour rendering index	Ra≥70
• Beam	Symmetric, omni-directional
• Service lifetime*	>50,000h L70/B50 (45°C)
• Ingress protection/resistance	IP65 / IK08
• Power factor	≥0.90
• Operating voltage	120-240V AC, 50/60Hz
• Operating temperature	-25°~45°C
• Protection class	I
• Finish	Grey (RAL9007), black (RAL9005) housing
• Construction	Aluminium, polycarbonate
• Mounting	Pole spigot mount
• Warranty*	5 years
• Surge protection	10kV
• Luminaire termination	Pre-wired 3-core flex
• Lighting control	Non dimmable ECG integral
• Luminaire weight	7.5Kg
• Spigot	Ø60mm, Ø76mm adaptor on request
• Other	Pole not included

**ORDER DATA**

Model	System wattage	Colour temperature
V-TOP-40W-GRY	40W	5000K
V-TOP-40W-BLK	40W	5000K
V-TOP-60W-GRY	60W	5000K
V-TOP-60W-BLK	60W	5000K

**ACCESSORIES**


Model	Description
V-TOP-SP-76-GRY	Ø76mm spigot adaptor (Ø60mm to Ø76mm), grey
V-TOP-SP-76-BLK	Ø76mm spigot adaptor (Ø60mm to Ø76mm), black

**FEATURES**

- Ideal replacement to conventional post top types
- Robust construction, high impact resistance
- Corrosion resistant treated finishing
- Highly reflective design for non-obtrusive, indirect illumination

**OPTIONS/ACCESSORIES**

- Ø76mm spigot adaptor; Ø60mm to Ø76mm
- Grey and black finish options

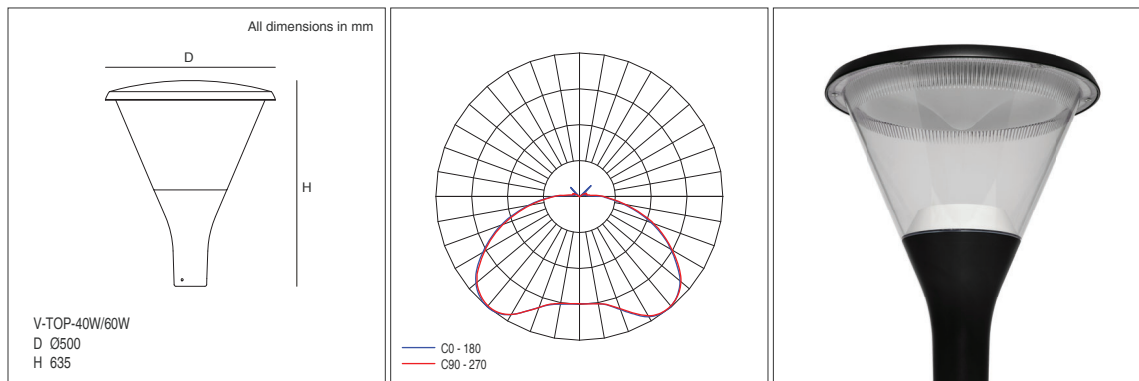

\*Stated power consumption and luminous flux luminaire specification subject to tolerance of ±10%, correlated colour temperature tolerance of ±150K. All values based on ambient temperature of 25°C unless otherwise stated. Warranted against faulty workmanship and/or performance deficiencies for duration of stated warranty period, subject to terms and conditions. LOWA Lighting reserve the right to make specification changes without prior notice.