



Graver Technologies

FILTRATION | SEPARATION | PURIFICATION



Product Specifications

Materials:

316 Stainless Steel

Surface Finish:

External Surfaces:

Mechanically Polished

Internal Surfaces:

Acid Washed (Pickled)

Operating Parameters

Maximum operating pressure:

Design pressures limits of 140 PSIG
(9.8 bar) @ 212°F (100°C)

Recommended operating pressure:

Limits of 100 PSIG (6.8 bar)
@ 165°F (74°C)

Other Details

- Economical design accommodates cartridges up to 2.75" OD
- 1/4" ports in the head and sump to allow alternate installation positions for draining/venting
- Models available for DOE, 222 and 226 cartridge connections
- Center Rod with top seal nut in DOE creates an ideal seal to accommodate industry cartridge length variations

GSC™ Series Filter Housings

Single Cartridge Filter Series

The GSC Series of single cartridge metal filter cartridge housings are constructed of 316 stainless steel with a clamp closure to service a wide range of general purpose filter applications. The design allows for full sump drainage and is available to accommodate a range of cartridge configurations.

FEATURES & BENEFITS


- Single shell construction for quick spill-free cartridge replacement
- In-line 3/4" and 1" inlet/outlet connections for ease of installation
- Drains/Vent built in
- Flow rates of up to 7 GPM (26.5 lpm) per 10" filter cartridge
- Housing pressure drop is 0.6 PSID at 7 GPM (40mbar @ 26.5 lpm)
- Mounting bracket available

TYPICAL APPLICATIONS

- Process Water
- Petrochemicals
- Coolants
- Paints/Inks
- Hydraulic fluids
- Solvents
- Plating solutions



GSC DIMENSIONAL DRAWING

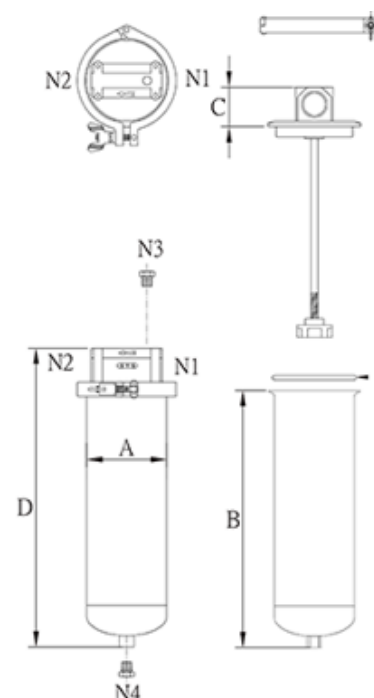

GSC SERIES HOUSING NOMENCLATURE INFORMATION

Model	Cartridge Length	Inlet / Outlet Size (inches)	Inlet/Outlet Type	Cartridge Type	Gasket
GSC	10 10"	–075 0.75"	–A 150# Flange	–0 DOE	–B Buna-N
	20 20"	–100 1.0"	–B BSPT	–3 222	–E EPDM
	30 30"		–N NPTF	–7 226	–S Silicone
	40 40"				–T Teflon (Silicone)
Example: GSC10–075–N–0–B					
GSC	10	–075	–N	–0	–B

GSC DIMENSIONAL DATA

Model	A	B	C	D	Weight
GSC10	4.2" (106 mm)	13.4" (340 mm)	2.1" (52 mm)	16.4" (422 mm)	8.8 lb (4 kg)
GSC20	4.2" (106 mm)	23.2" (590 mm)	2.1" (52 mm)	26.5" (672 mm)	12.1 lb (5.5 kg)
GSC30	4.2" (106 mm)	33.1" (840 mm)	2.1" (52 mm)	36.3" (922 mm)	15.4 lb (7.0 kg)
GSC40	4.2" (106 mm)	42.9" (1090 mm)	2.1" (52 mm)	46.1" (1172 mm)	18.7 lb (8.5 kg)

FOR MORE INFORMATION

GTX-356 5-19

DISTRIBUTED BY

Customer Service/Technical Support: 1-888-353-0303

Europe (UK): +44-1424-777791 | China: +86-21-5238-6576

Asia: +65 9671 9966

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. GSC is a trademark of Graver Technologies, LLC.



Graver Technologies | 200 Lake Drive, Glasgow, DE 19702 | 302-731-1700 | 800-249-1990
Fax: 1-302-369-0938 | info@gravertech.com | www.gravertech.com

A member of The Marmon Group—A Berkshire Hathaway Company