



The Beauty of
Imperfection

Basic


There are 3 types of tiles, in the most basic shapes, which allow for infinite compositions.

BASIC can be made in a fine / grainy / sand blasted finish. and in any of our 10 shades.


Material: Hand-Made Concrete

Use: Interior / Exterior use for Walls cladding & Flooring

Thickness: 15 mm - 5/8"

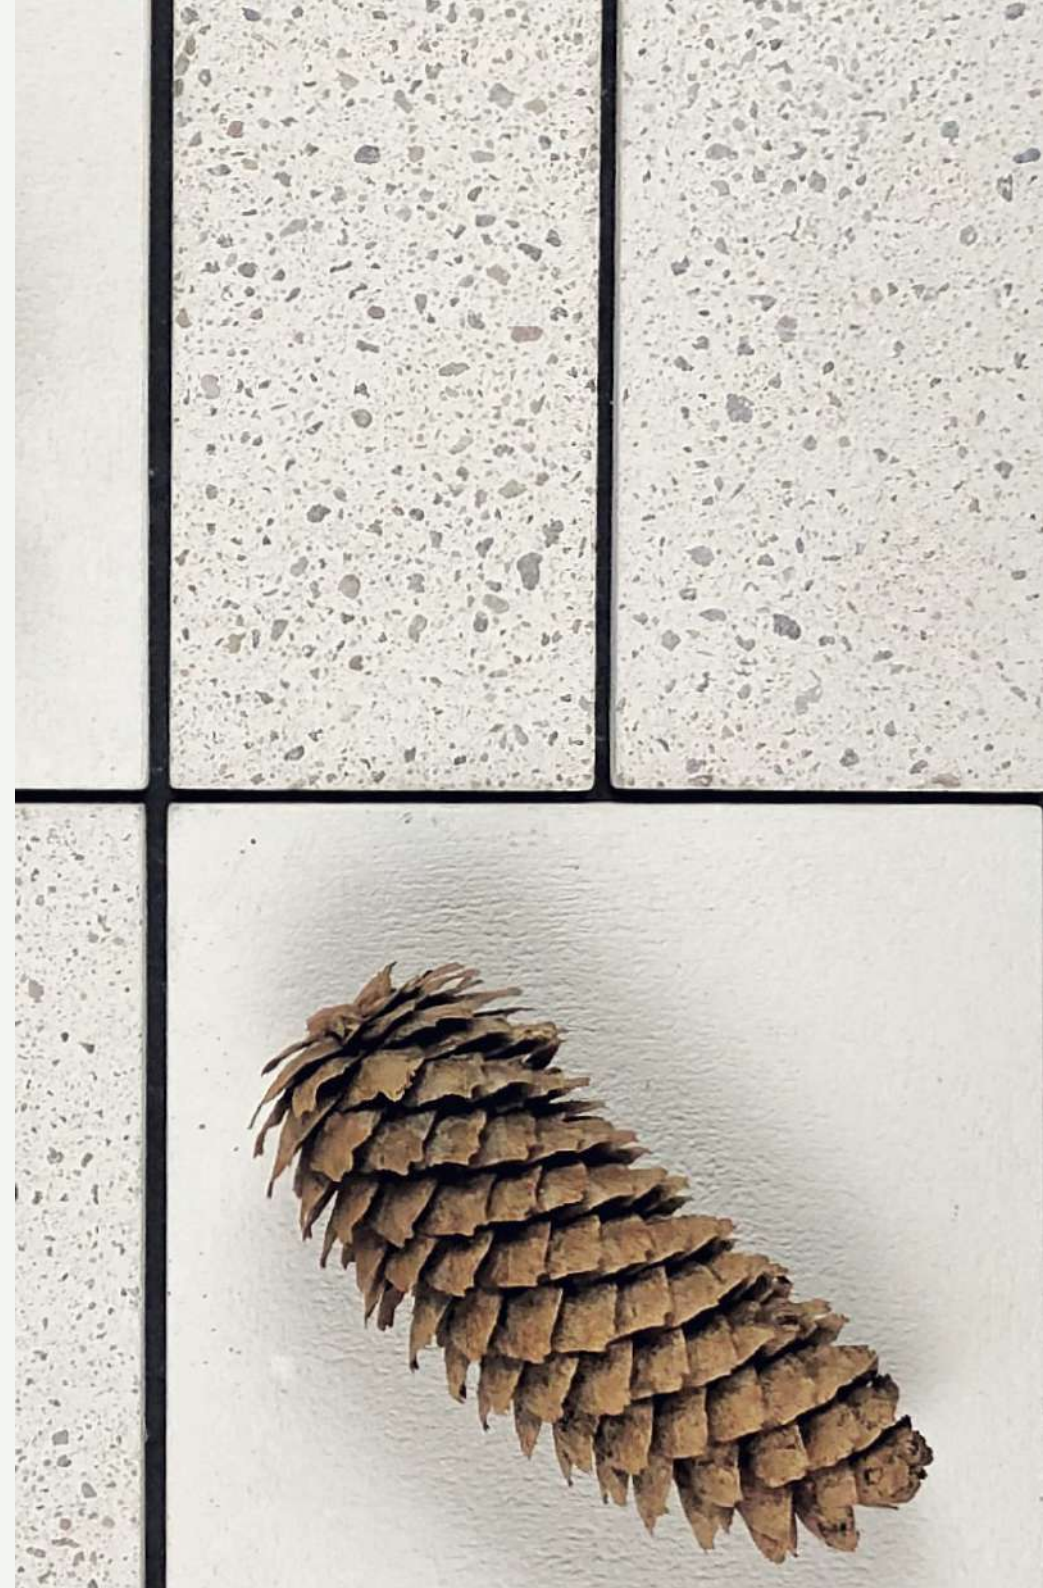


Basic// Wall family tiles

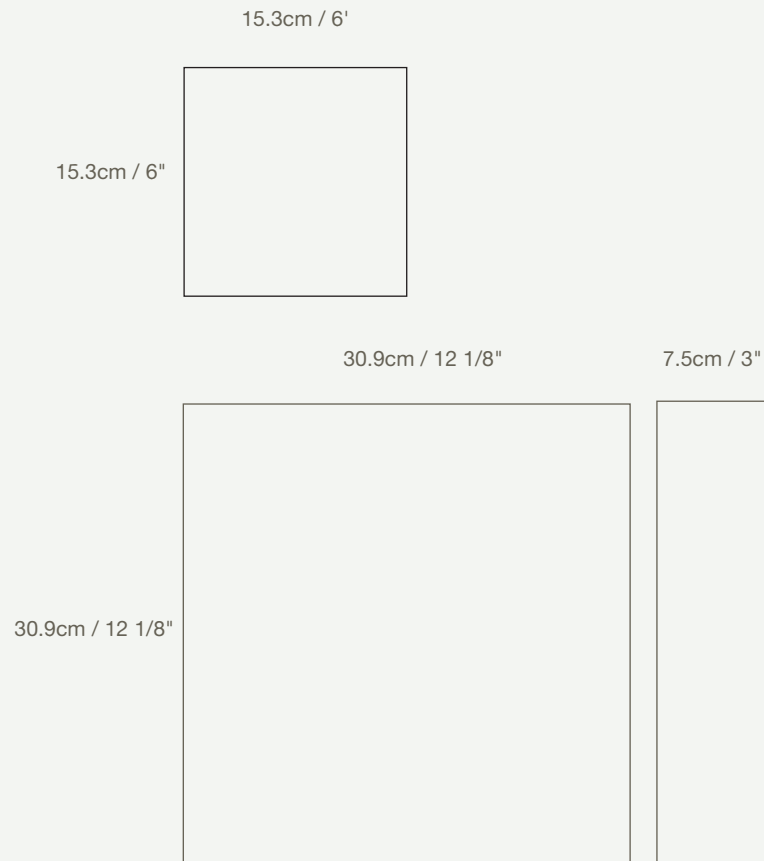

Basic// Surface finish


Basic



Basic SandBlast



Basic // Layout Composition Suggestions

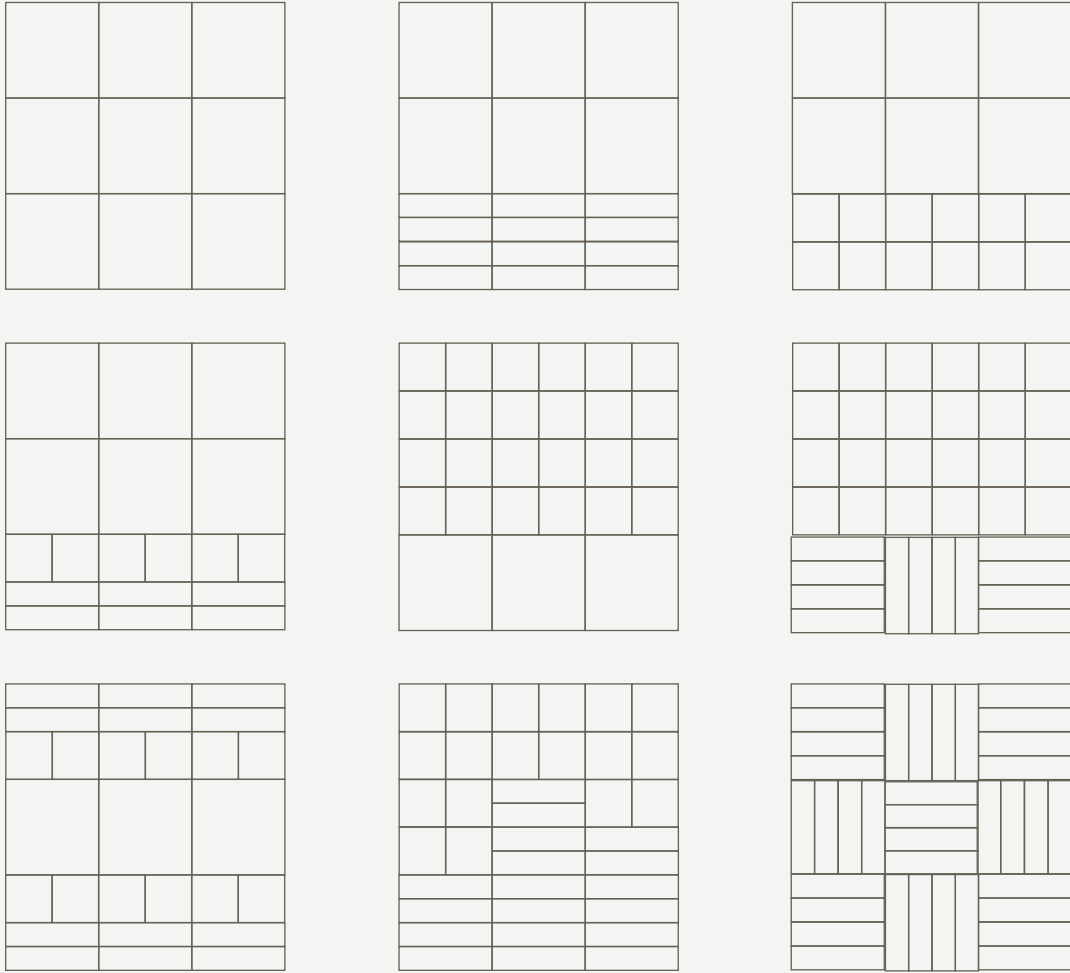

Packing / Information

NAME	PCS-SQM	PCS-Crate	SQM-Crate	KG-Crate	SUITABILITY	Catalog num.	Notes
BASIC 7.5 X 30.9 SAND BLASTED	87.14	26\832	0.605\19.36	~620	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4039	CARDBOARD BOX\CRATE
BASIC 7.5 X 30.9	87.14	26\832	0.605\19.36	~620	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4040	CARDBOARD BOX\CRATE
BASIC 15.3 X 15.3 SAND BLASTED	42.7	26\832	0.605\19.36	~620	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4041	CARDBOARD BOX\CRATE
BASIC 15.3 X 15.3	42.7	26\832	0.605\19.36	~620	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4042	CARDBOARD BOX\CRATE
BASIC 30.9 X 30.9 SAND BLASTED	10.47	244	22.18	~710	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4044	
BASIC 30.9 X 30.9	10.47	244	22.18	~710	INTERIOR / EXTERIOR USE FOR WALLS / FLOORING	EN4043	

GENERAL MATERIAL PERFORMANCE DATA

*TESTED ACCORDING TO NP EN1339 STANDARD

DIMENSIONS TOLERANCE	BENDING STRENGTH	ABRASION RESISTANCE	REACTION TO FIRE	SLIP/ SKID	WATER ABSORPTION	FREEZE/THAW RESISTANCE
CLASS 3(R) ±2MM	CLASS 2(T) ≥ 4MPA	CLASS 4(I) ≤ 20MM	A1	SATISFACTORY	CLASS 2(B) ≤ 6% AS A MEAN	CLASS 3(D) ≤ 1.0 KG/M²

COLORS:

