


AUTOSMART M4SV

Product Overview

The AutoSmart M4SV features:

- Output 0-5V, 0-10V, 4-20mA
- Non-contact
- Repeatability error 0,1% full scale
- Interchangeability $\pm 1,5\%$ full scale
- Resolution approx. 0,1°C (0,2°F)
- Small size sensor

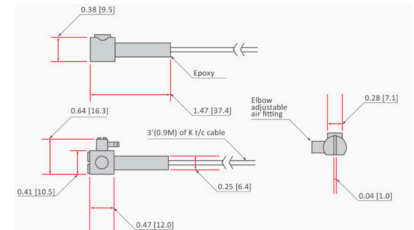

Technical Data

Sensor Range	50 to 250°C (122 to 482°F)
Sensor Ambient Temperature Range	-20 to 100°C (-4 to 212°F) with air off -20 to 120°C (-4 to 248°F) with air on
Transmitter Ambient Temperature Range	0 to 70°C (32 to 158°F)
Storage Temperature Range	-10 to 70°C (14 to 158°F)
Field of View	14° (4:1) approximately
Minimum Spot Size	3 mm (0.1")
Spectral Response	5,0 to 20µm
Update Time	Approximately 250 msec.
First Reading Upon Power Up	Approximately 2 seconds

Connector cable	3 m (9.8 ft) 22AWG*4C + F + Jacket black PUR cable OD=5,0 mm -40°C~+105°C
Sensor cable	0,9 m (3ft) Unshielded, duplex insulated, type K, 24AWG, PFA jacket rated to 260°C (500°F)
Sensor Dimensions	See diagram above
Weight	Sensor: Approximately 60g (2oz.) with cable Transmitter: Approximately 50g (1.702oz.)
Housing	Sensor: Stainless steel, hermetically sealed, exceeds NEMA 4X, IP67. Transmitter: Heavy Duty SS, NEMA, IP54. Air Purge: Makrolon-9415
Emissivity Setting	0,90
Power	12 or 24VDC ($\pm 10\%$). Shuts off when voltage is functionally low
Power Consumption	$\pm 10\text{mA}$ (without output signal device)
Including Air Purge	Built-in, for cooling and cleaning of sensor
Loop Impedance	(4-20mA models) $>500\Omega$

Ordering Information

AutoSmart IR -	-	-	-
Power: 12 = 12VDC 24 = 24VDC			
Output: 005 = 0-5V 010 = 0-10V 420 = 4-20mA			
		Temperature range: 100 = 50 to 100°C (122 to 212°F) 250 = 50 to 250°C (122 to 482°F)	



Dimensions

