

EMT Datasheet

EMT-2490-1-4-ECO



This Energy Machines™ model contains two oil-free centrifugal turbocompressors and a refrigerant circuit. The compressor is classified as a non-positive displacement compressor.

This model is equipped with an economizer heat exchanger, increasing its energy efficiency. The machine's evaporator and condenser are shell-and-tube heat exchangers. The evaporator operates with a flooded evaporation technique.

These components work together to create a powerful and efficient machine.

Performance

Heating		Cooling	
Heating power	1178 kW	Heating power	1286 kW
Cooling power	914 kW	Cooling power	1024 kW
COP	1.37	COP	3.91

Design parameters

Heating		Cooling	
Heated fluid (in/out)	47°C / 53°C	Heated fluid (in/out)	37°C / 43°C
Chilled fluid (in/out)	12°C / 7°C	Chilled fluid (in/out)	12°C / 7°C
Chilled fluid: water, Heated fluid: water			

Pressure drop at rated flow

Heating		Cooling	
Heated fluid	42.4 kPa / 46.9 l/s	Heated fluid	50.8 kPa / 51.2 l/s
Chilled fluid	29.1 kPa / 43.67 l/s	Chilled fluid	35.5 kPa / 48.92 l/s

Rated flow


Heating		Cooling	
Heated fluid	46.9 l/s	Heated fluid	51.2 l/s
Chilled fluid	43.67 l/s	Chilled fluid	48.92 l/s

Refrigerant

Type	R1234ze
GWP value	1.37
Charge	N/A kg

Dimensions


Length / Width / Height	4000 mm / 1260 mm / 1965 mm
Weight (dry/commissioned)	N/A kg / N/A kg

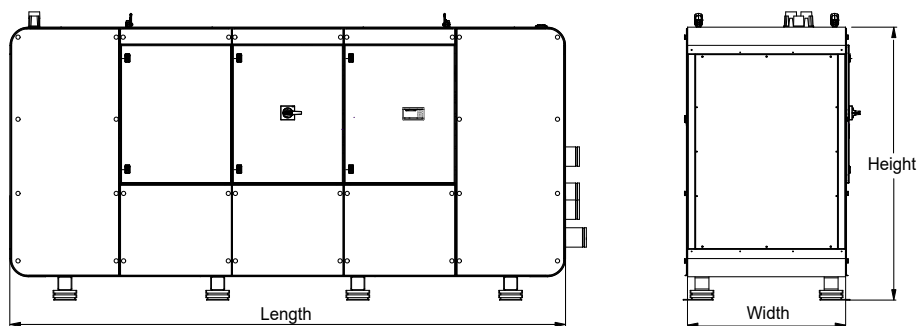

Electricity

Rated power supply	400 VAC / 50 Hz / 3 phase
Rated power input	266 kW
Rated current	420 A
Fuse	500 A

Flow diagram

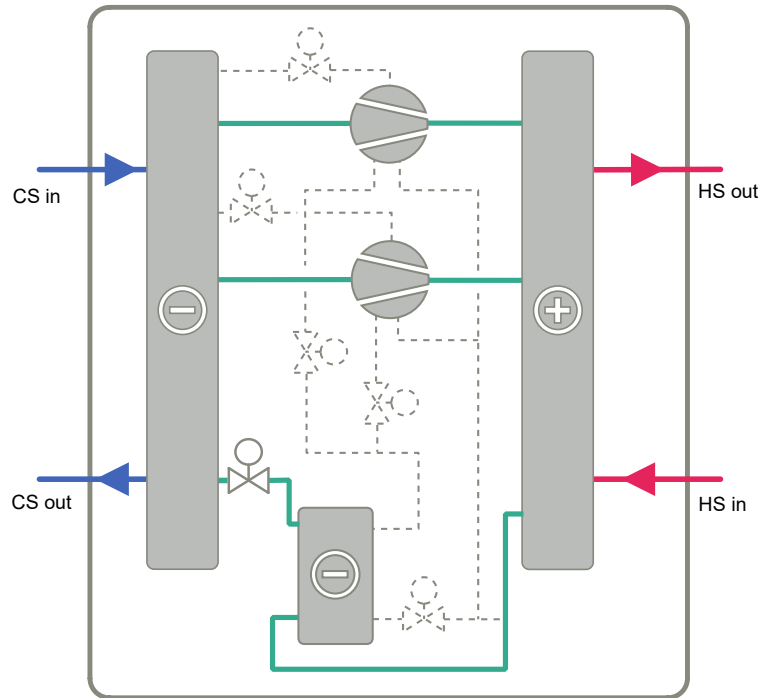

Energy Machines has a policy of continuous product and data improvement and reserves the right to change design and specifications without notice. While Energy Machines strives for accuracy, we do not guarantee the completeness or correctness of the information.

