



Valid from January 1st to June 30th, 2024



MULTI-FUNCTION SOLUTION FOR A WIDE RANGE OF OPERATIONS

Innovative four-edged inserts provide ultimate machining flexibility and economy. All-round cutter with center cutting capability provides ultimate machining versatility.





Insert:

LXMU-MM (AH120, AH3225, AH8015)

Shank type:

EVLX06/08/10/12/16/19...

(Short type) DC = Ø0.500" - Ø1.500" (Short type) DC = Ø12 - Ø40 mm

EVLX06/08/10/12/16/19...L

(Long type) DC = Ø0.500" - Ø1.500" (Long type) DC = Ø12 - Ø40 mm

Modular type: HVLX06/08/10/12/16...

DC = Ø12 - Ø33 mm



LXMU-MM

Size 06:

APMX 0.197", 5 mm Tool dia.: ø0.500" ø12 - ø13 mm

Size 08:

APMX 0.276", 7 mm **Tool dia.:** ø0.625" ø16 - ø17 mm

Size 10:

APMX 0.354", 9 mm Tool dia.: ø0.787" ø20 - ø21 mm Size 12:

APMX 0.433", 11 mm Tool dia.: ø1.000" ø25 - ø26 mm

Size 16:

APMX 0.570", 14.5 mm Tool dia.: ø1.250" ø32 - ø33 mm

Size 19:

APMX 0.708", 18 mm Tool dia.: ø1.500" ø40 mm





Valid from January 1st to June 30th, 2024



HIGHLY-VERSATILE FACE MILLING CUTTERS FOR A WIDE VARIETY OF MATERIALS

DoTriple-Mill features an improved dovetail clamping structure and offers triple advantage of using square, octagonal, and round inserts in the same pocket.



GET 1Cutter

FREE of charge! Promo code: TG202



Double-sided, square insert



ON*U

Double-sided,
octagonal insert

RNMU
Double-sided,
round insert

Limited up to diameter 5" (125 mm)

Insert:

SN*U-MJ/MH/W (AH120, AH3135, AH3225, T1215, T3225) APMX = 6 mm (0.236")

ON*U-MJ/W (AH120, AH3135, AH3225, T1215, T3225) APMX = 3.4 mm (0.134")

RNMU-MJ (AH120, AH3135, AH3225, T1215, T3225) APMX = 6 mm (0.236")

Bore type: TASN13

DC = Ø2" - Ø5", Ø50 - Ø125mm









HIGH-FEED MILLING CUTTER WITH MAXIMUM VERSATILITY AND EFFICIENCY

2 types of inserts can fit one cutter body providing two different entry angles.



GET 1Cutter

FREE of charge! Promo code: TUS20





Limited up to 5" diameter

Insert:

SWMT09/15**ZER SWMT09/15**UER (AH8015, AH120, AH3225, AH3135, AH130) APMX = 0.039" - 0.098"

Shank type: EXSW09/15... DCX = Ø1" - Ø1.25"

Bore type: TXSW09/15... DCX = Ø1.5" - Ø5"







Valid from January 1st to June 30th, 2024



PROFILING CUTTER FOR 3-DIMENSIONAL MACHINING DUE TO HELICAL CUTTING EDGES

Unique twisted insert geometries assures secure insert clamping for high stability. Two types of inserts fit one cutter: radius and high efficiency inserts.



GET 1Cutter



Insert:

LNMX04/05/06-MJ/ML (Radius type) (AH3135, AH120, AH8015, AH3225) APMX = 0.157" - 0.236"

LNMX04/06-HJ/HL (High-feed type) (AH3135, AH120, AH8015, AH3225) APMX = 0.051" - 0.079"

Shank type:

EXLN04/05/06R... (Short type)

EXLN04/05/06R**L... (Long type)

DCX = Ø0.787" - Ø2.000", Ø20 - Ø40 mm

Modular type: HXLN04/05/06R... DCX = Ø20 - Ø42 mm

Bore type:

TXLN04/05/06R...


DCX = Ø1.50" - Ø3.00", Ø40 - Ø66 mm



LNMX...MJ / ML Radius insert



LNMX...HJ / HL High-feed insert

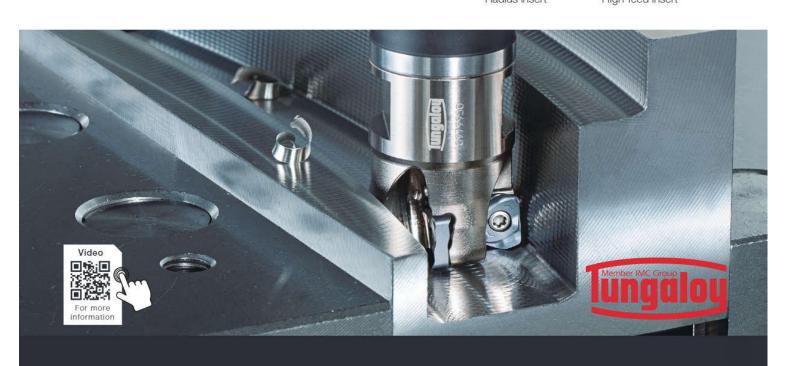



Tungaloy-NTK America, Inc. 3726 Ventura Dr. Arlington Heights, IL 60004 TEL: 1-888-554-8394 FAX: 1-888-554-8392 info@tungaloy-ntk.com tungaloy.com/us

Leading in Innovation

