


LPSF

Bi-directional burst detection for low-pressure applications using the VAPRO or POSIPRO rupture discs

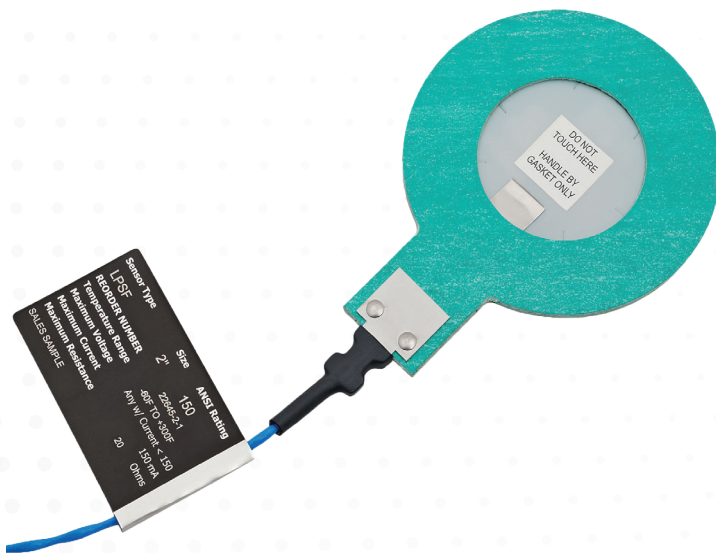

This offers fast recognition of failures, which is critical for hazardous and environmentally sensitive media.

Compatible with computer-controlled systems

osecoelfab.com

TECHNICAL SPECIFICATIONS



Size range	2"-10"
Standard materials	316 Stainless Steel and PTFE
Cable	24 AWG, 2 Conductor, Fluoropolymer insulation, Shielded
Cable length	6ft
Maximum voltage	24V AC/DC
Maximum current	100 mA
Max. pre-burst resistance	20 Ohms

Related Products

Rupture Discs

POSIPRO

VAPRO