




Prelude 200 Series

Technical Specifications

Rail Max Depth: 868 mm
Rail Min Depth: 681 mm

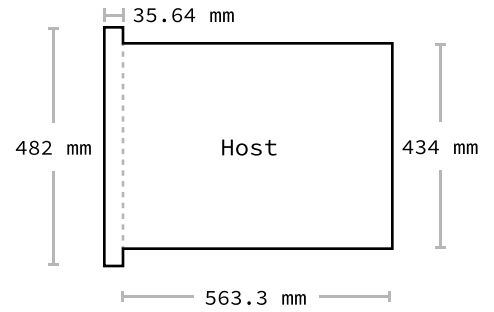

P210	Component	Heat (BTU)	Power (W)	Rack Unit	Weight (lbs)	AC Auto-ranging (V)	Operating Temp (°C)
-------------	-----------	------------	-----------	-----------	--------------	---------------------	---------------------

Host	Server	1980	580	1U	40	100 - 240	10 - 35
------	--------	------	-----	----	----	-----------	---------

System	CPU Dies	CPU Cores/Die	CPU Clock (GHz)	CPU Model	RAM (GB)	Usable SSD (GB)	Usable HDD (GB)	1gb Mgmt. NICs	10gb Base-T FT	1gb NICs	10gb Base-T
--------	----------	---------------	-----------------	-----------	----------	-----------------	-----------------	----------------	----------------	----------	-------------

P210	1	6	3.2	Xeon E-2356G	32	960	0	1	0	6	0
------	---	---	-----	--------------	----	-----	---	---	---	---	---

P212	Component	Heat (BTU)	Power (W)	Rack Unit	Weight (lbs)	AC Auto-ranging (V)	Operating Temp (°C)
-------------	-----------	------------	-----------	-----------	--------------	---------------------	---------------------

Host	R350	1980	580	1U	40	100 - 240	10 - 35
------	------	------	-----	----	----	-----------	---------

System	CPU Dies	CPU Cores/Die	CPU Clock (GHz)	CPU Model	RAM (GB)	Usable SSD (GB)	Usable HDD (GB)	1gb Mgmt. NICs	10gb Base-T FT	1gb NICs	10gb Base-T
--------	----------	---------------	-----------------	-----------	----------	-----------------	-----------------	----------------	----------------	----------	-------------

P212	1	8	3.2	Xeon E-2388G	32	960	3600	1	0	6	2
------	---	---	-----	--------------	----	-----	------	---	---	---	---