


Rail Max Depth: 868 mm
 Rail Min Depth: 681 mm



Nemesis 600 Series

Technical Specifications

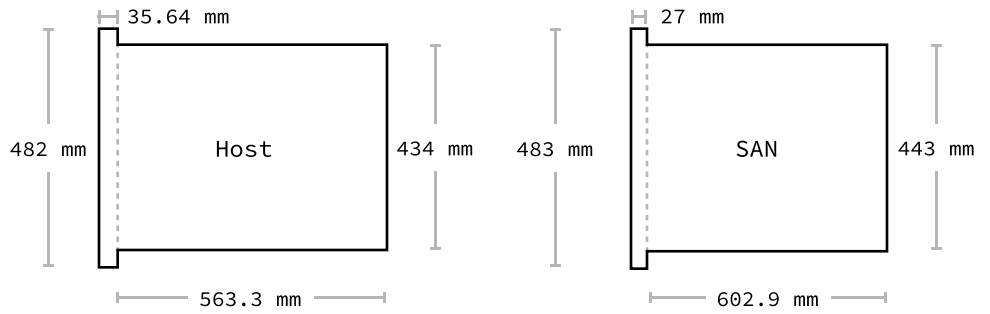

N610	Component	Heat (BTU)	Power (W)	Rack Unit	Weight (lbs)	AC Auto-ranging (V)	Operating Temp (°C)
Host 1	Server	2050	600	1U	29.98	100 - 240	10 - 35
Host 2	Server	2050	600	1U	29.98	100 - 240	10 - 35
SAN	Storage	1980	580	2U	40	100 - 240	10 - 35
Total		6080	1780	4U	99.96		

System	CPU Dies	CPU Cores/Die	GPU Clock (GHz)	CPU Model	RAM (GB)	Usable SSD (GB)	Usable HDD (GB)	1gb Mgmt. NICs	10gb Base-T FT	1gb NICs	10gb Base-T
N610/Host (ea)	1	6	3.2	Xeon E-2356G	32	0	0	1	2	2	0
N610/SAN	N/A	N/A	N/A	N/A	N/A	1920	0	2	0	0	0

N612	Component	Heat (BTU)	Power (W)	Rack Unit	Weight (lbs)	AC Auto-ranging (V)	Operating Temp (°C)
Host 1	Server	2050	600	1U	29.98	100 - 240	10 - 35
Host 2	Server	2050	600	1U	29.98	100 - 240	10 - 35
SAN	Storage	1980	580	2U	40	100 - 240	10 - 35
Total		6080	1780	4U	99.96		

System	CPU Dies	CPU Cores/Die	CPU Clock (GHz)	CPU Model	RAM (GB)	Usable SSD (GB)	Usable HDD (GB)	1gb Mgmt. NICs	10gb Base-T FT	1gb NICs	10gb Base-T
N612/Host (ea)	1	8	3.2	Xeon E-2388G	32	0	0	1	2	2	0
N612/SAN	N/A	N/A	N/A	N/A	N/A	1920	24000	2	0	0	0