

WORKHORSE 55PVR

NEW 55PVR • Hydraulic gooseneck • Low entry deck • Fixed bogie



Truly Versatile Lowbed


Millers, Pavers, Rollers, Brooms...

If you use it to build a road, the Workhorse 55PVR hauls it.


- 55 tons capacity in 16 ft. with 3 or 4 axles close coupled
50 tons capacity in 12 ft. with 3 or 4 axles close coupled
(GAWR and GVWR determine legal payloads)
- Fastest, most versatile hydraulic removable gooseneck in the industry ...
You can connect or disconnect on uneven ground!
- 102" swing radius for easy maneuverability
- 5-Position gooseneck ride-height adjustment
- Low 9° front approach angle
- Low 16° deck-to-bogie transition ramps
- Removable center bogie section with low boom well to haul excavators
- 24 ft. clear deck length—use every inch
- Air ride suspension with automatic/manual raise/lower control, 5-position mechanical ride height and dump valve for total adjustment flexibility
- LED lights, strobes, and D-rings are all standard to give you more trailer for your money



Controls are located for easy access from the rear whether the bogie center section is installed or removed.

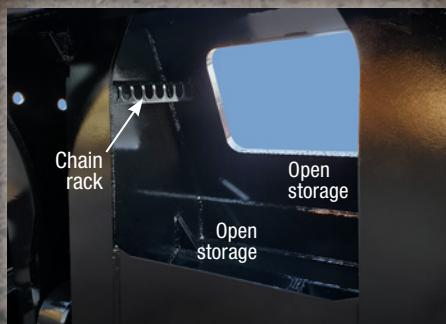

Gooseneck features a generous open storage area accessible from the front or back of gooseneck with chain bar storage and dividers.

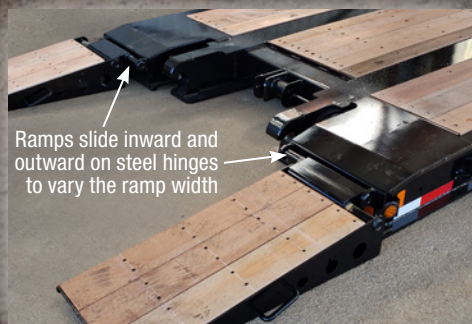

Front flip ramps feature 9° load angle with adjustable widths to handle a wide range of equipment (ramps slide horizontally).




Remove the center bogie section to create a low boom well that is great for hauling excavators—4-point lift system makes it easy to convert.

www.fontaineheavyhaul.com

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice

Fontaine Workhorse™ 55PVR Specifications

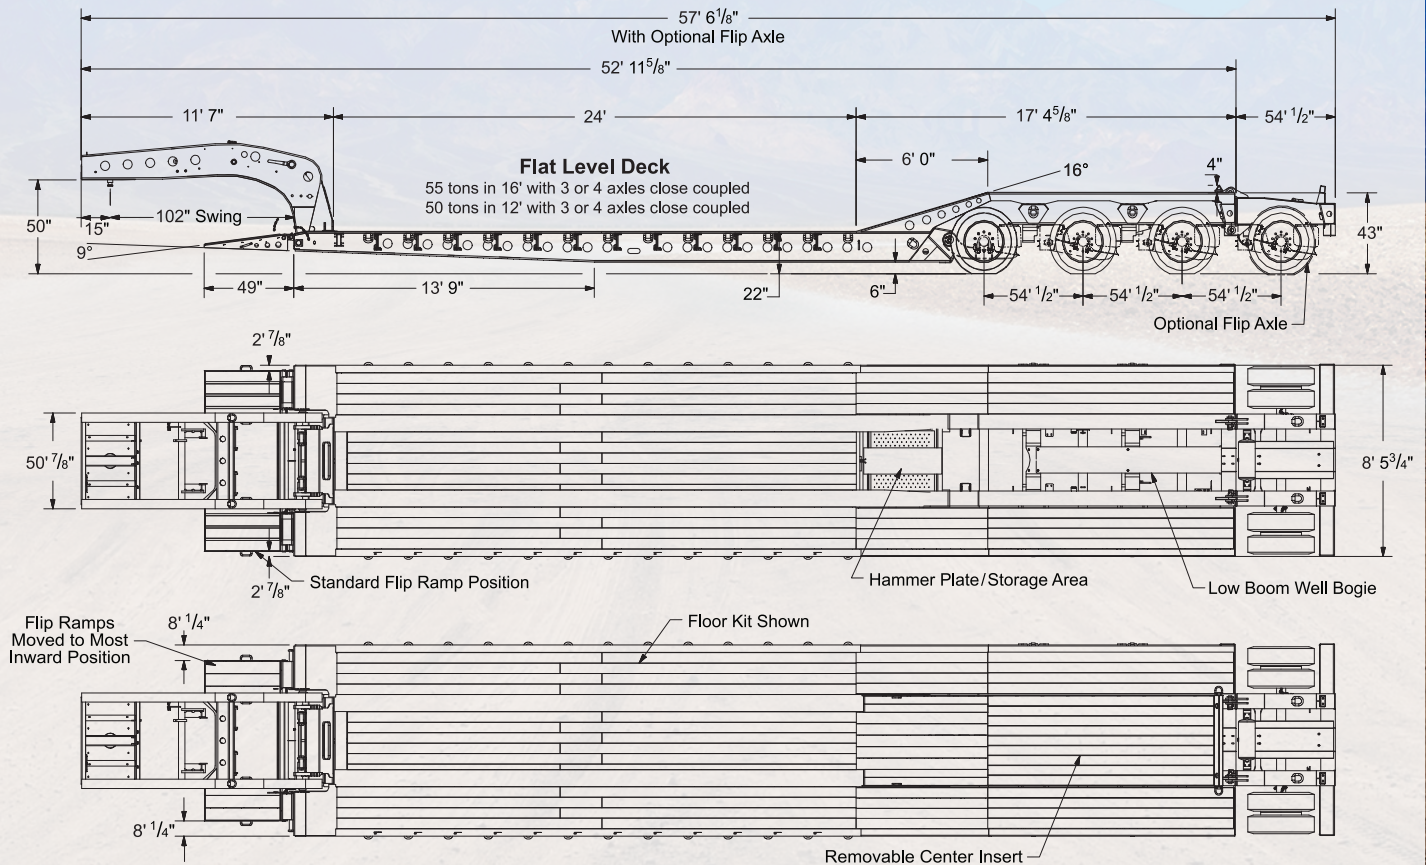

CAPACITY

- 55 tons in 16-feet with 3 or 4 axles close coupled
- 50 tons in 12-feet with 3 or 4 axles close coupled (GAWR & GVWR determine legal payloads)

MAIN BEAMS

- All main longitudinal members fabricated using 100 KSI minimum yield steel flanges with 50,000 lb. webs for greater strength

COMPATIBILITY

- Designed to accept 4th flip axle, close couple only

GOOSENECK FEATURES

- Hydraulic removable non-ground bearing
- 5-Position front ride-height adjustments
- 50" nominal loaded fifth wheel height
- 102" swing radius with removable kingpin
- Open storage area located at back of gooseneck with chain bar
- Set up for wet line operation
- J560 7-pin electrical connector

DECK FEATURES

- Tapered beam design
- 8' 6" overall width
- 24' clear deck length
- 22" loaded deck height with 6" ground clearance
- 1 1/2" apitong flooring full width
- 9° front flip ramps standard
- Extension brackets installed for later installation of optional outriggers:
 - 12 pair (24 total) removable swing type
 - 1 pair (2 total) heavy-duty removable hook-on type
- Removable center bogie section
- Front bogie ramps sloped at 16° angle

DECK FEATURES (continued)

- Hammer Plate installed over recessed crossmembers with perforated plate below forming 2 storage areas (note: only accessible when bogie center insert is removed)
- Fixed deck to bogie connection

BOGIE FEATURES

- 3 axle bogie (dust shield option available)
- 22,500 lbs. nominal capacity per axle (GAWR determined by suspension type, brakes, tires, and other components)
- Axle spread: 54.5" between axle centers
- Bogie platform includes load bearing wheel covers & apitong wood filled center insert for full width loading (insert is removable with 4-point lift capability, mechanical locking pin in front; bolts in 4" bump stop in rear)
- Air-ride suspension with automatic/manual raise/lower controls
- 5-Position mechanical ride-height control system
- Manual dump valve (Push/Pull)
- Liquid filled air gauge standard
- Chain lift first axle/Air lift third axle
- Override chains axle 1 & 2
- With center insert removed, low boom well bogie has V-style boom trough and bolt-in V pan

BOGIE FEATURES (continued)

- Heavy duty V-style rear bumper
- Rear Bogie Height: 43"
- Bogie width: 8' 6"

BRAKES

- 16 1/2" x 7" brakes with 5 1/2" autoslacks
- Heavy-duty brake drums, outboard mount
- Quick change replacement feature
- Automatic slack adjusters

WHEELS/TIRES

- Wheels: 8.25 x 22.5 steel disc, hub-piloted (optional aluminum wheels available)
- Tires: 255/70R 22.5 OEM Standard

ELECTRICAL SYSTEM

- Sealed harness for maximum corrosion resistance
- DOT sealed beam with LED lights
- 3 marker lights per side including mid turn
- 4" flush mounted; battery powered amber strobes

PROTECTIVE COATING

- Highest quality 2-part polyurethane enamel fights corrosion to extend trailer life
- Primed for better paint adhesion

LASH RINGS

- 34 total D-Rings; 17 pair

FLAG HOLDERS

- Located at front of deck and on rear bumper

ESTIMATED EMPTY WEIGHT W/O OPTIONS

- With bogie center insert: 23,480 lbs. ± 3%
- Without bogie center insert: 22,390 lbs. ± 3%



Specifications subject to change without notice. Photos show some optional equipment.

www.fontaineheavyhaul.com • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice

A Marmon | Berkshire Hathaway Company

©2021 Fontaine Heavy-Haul • LT-123-R10 • February 2021