



GMK 5180 180 to

Hubkraft 180 to
max. Auslegerlänge 60 m
Eigengewicht 60 to

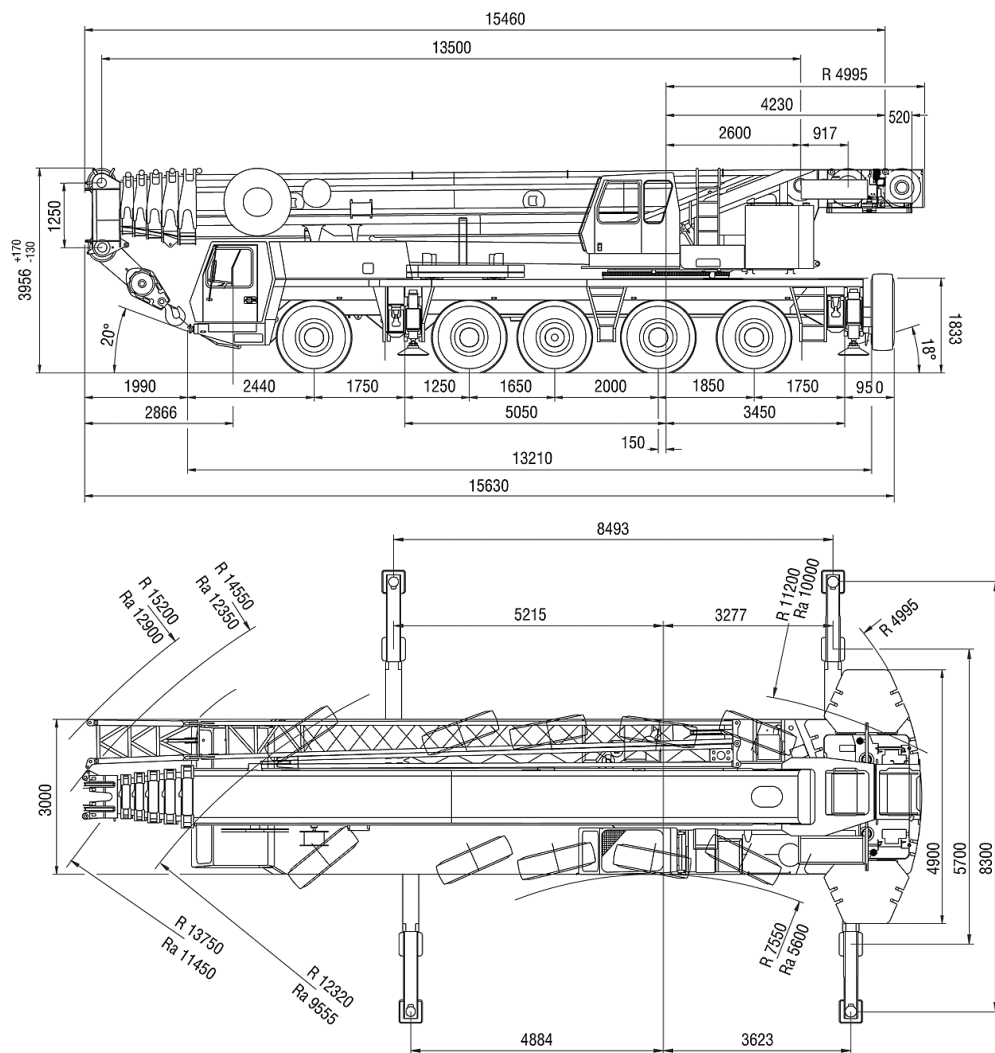

Grove GMK 5180: Hubhöhen

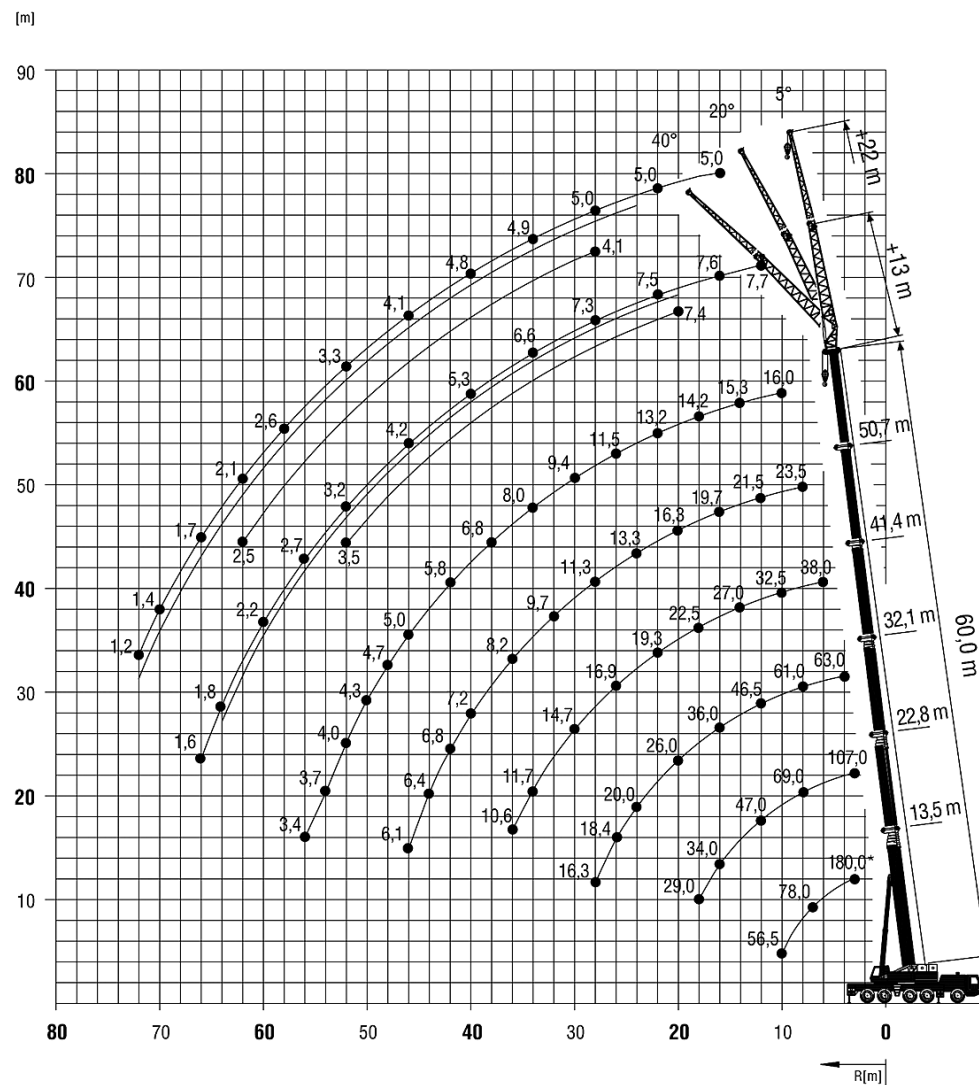

GMK 5180 180 to

Traglasttabelle in to
Maschine abgestützt 8,3 m



GMK 5180
63 to Gegengewicht

Arbeitsradius in m	Hauptauslegerlängen in m											
	13.5*	13.5	18.2	22.8	27.5	32.1	36.8	41.4	46.1	50.7	55.4	60.0
3	180.0	140.0	139.0	107.0	78.0							
4	137.0	118.0	117.0	107.0	78.0	63.0						
5	120.0	101.0	101.0	100.0	78.0	63.0	50.0					
6	105.0	88.0	88.5	87.5	77.0	63.0	50.0	38.0				
7	93.5	78.0	78.5	77.0	75.0	63.0	50.0	37.0	28.0			
8	82.5	69.5	70.0	69.0	69.5	61.0	50.0	35.5	28.0	23.5		
9	71.5	62.5	63.0	62.0	62.5	57.0	49.0	34.0	27.0	23.0	18.5	
10	58.5	56.5	57.5	56.0	57.0	53.0	46.5	32.5	26.5	22.5	18.3	16.0
11			52.5	51.0	52.0	49.5	44.0	31.0	26.0	22.0	18.0	16.0
12			48.0	47.0	47.5	46.5	41.0	30.5	25.5	21.5	17.8	15.8
13			44.5	43.0	44.0	44.0	39.0	29.0	25.0	21.0	17.6	15.6
14			41.5	39.5	40.5	41.5	36.5	27.0	24.5	20.5	17.3	15.3
15			34.5	37.0	37.5	38.5	34.5	25.5	23.0	20.0	17.0	15.0
16				34.0	35.0	36.0	33.0	24.5	22.0	19.7	16.7	14.8
18				29.0	30.0	31.0	30.0	22.5	19.6	18.4	15.9	14.2
20					26.5	26.0	27.0	21.0	17.3	16.3	15.1	13.7
22					23.0	22.5	23.5	19.3	15.7	14.8	14.3	13.2
24					19.9	20.0	20.5	17.8	14.4	13.3	12.9	12.6
26						18.4	17.8	16.9	13.5	12.3	11.7	11.5
28						16.3	15.7	15.9	12.7	11.3	10.6	10.4
30							13.9	14.7	11.8	10.5	9.4	9.4
32							12.9	13.1	11.2	9.7	8.7	8.7
34								11.7	10.6	8.9	8.0	8.0
36								10.6	10.0	8.2	7.3	7.3
38									9.4	7.7	6.8	6.8
40									8.8	7.2	6.3	6.3
42									8.1	6.8	5.9	5.8
44										6.4	5.5	5.4
46										6.1	5.2	5.0
48											4.9	4.7
50											4.6	4.3
52												4.0
54												3.7
56												3.4

Traglasttabelle in to
Maschine abgestützt 8,3 m



GMK 5180
63 to Gegengewicht

m	60 13				
m	5°	20°	40°	*5°-20°	*20°-40°
12.0	7.7				
13.0	7.7				
14.0	7.6				
15.0	7.6				
16.0	7.6	7.7		7.7	
18.0	7.6	7.6		7.6	
20.0	7.5	7.6	7.4	7.6	7.4
22.0	7.5	7.6	7.4	7.6	7.4
24.0	7.5	7.6	7.4	7.6	7.4
26.0	7.4	7.5	7.4	7.5	7.4
28.0	7.3	7.4	7.4	7.4	7.4
30.0	7.1	7.2	7.4	7.2	7.4
32.0	6.9	7.0	7.2	7.0	7.2
34.0	6.6	6.7	6.8	6.7	6.8
36.0	6.2	6.3	6.4	6.3	6.4
38.0	5.7	5.8	6.0	5.8	6.0
40.0	5.3	5.4	5.6	5.4	5.6
42.0	4.9	5.0	5.2	5.0	5.2
44.0	4.6	4.7	4.9	4.7	4.9
46.0	4.2	4.3	4.5	4.3	4.5
48.0	3.9	4.0	4.2	4.0	4.2
50.0	3.5	3.6	3.8	3.6	3.8
52.0	3.2	3.4	3.5	3.4	3.5
54.0	3.0	3.1		3.1	
56.0	2.7	2.8		2.8	
58.0	2.5	2.6		2.6	
60.0	2.2	2.3		2.3	
62.0	2.0	2.1		2.1	
64.0	1.8	1.9		1.9	
66.0	1.6				

* unter Teillast wippbar