


# PROTEUS<sup>®</sup> X Basics



## OEL8000IIIXP System Parts List

OEL8000IIIXP	<b>PROTEUS<sup>®</sup> X</b> Tank Gauging Controller with 7" color touch screen, printer, (1) RS-232 port, & Ethernet. Accepts up to 16 MTG Series inventory probes and 64 BX Series leak sensors.
XB-416	4 probe and 16 leak sensor module for OEL8000IIIX.
XB-RB8	8 channel relay board for OEL8000IIIX.
MTG-*	Magnetostrictive probe (*denotes probe length).
BX-LS BX-PDS	Sump sensor or doublewall sensor for steel tanks 8 feet and under. (product distinguishing version)
BX-LWF-* BX-PDWF-*	Doublewall sensor (*denotes tank diameter). (product distinguishing version)
RAS-1-NYS	Common overfill remote annunciator in Nema 4X enclosure, with acknowledgement switch, 100db horn, and high intensity strobe light.
RD7CTS	<b>PROTEUS<sup>®</sup> Mini-Me<sup>™</sup></b> universal remote ATG monitor with 7" color touch screen display for audio/visual alarms and current inventory.
RD-232C-75	75 feet RS232 cable for use with RD7CTS remote display.
RD-PCK	120 VAC power cord kit for use with <b>PROTEUS<sup>®</sup></b> remote displays.
C232-422-RD7CTS	RS-232-422 Booster Kit to increase distance of RS-232 output 3,000 feet for use with RD7CTS remote display (Includes 2 converters and 2 power transformers).

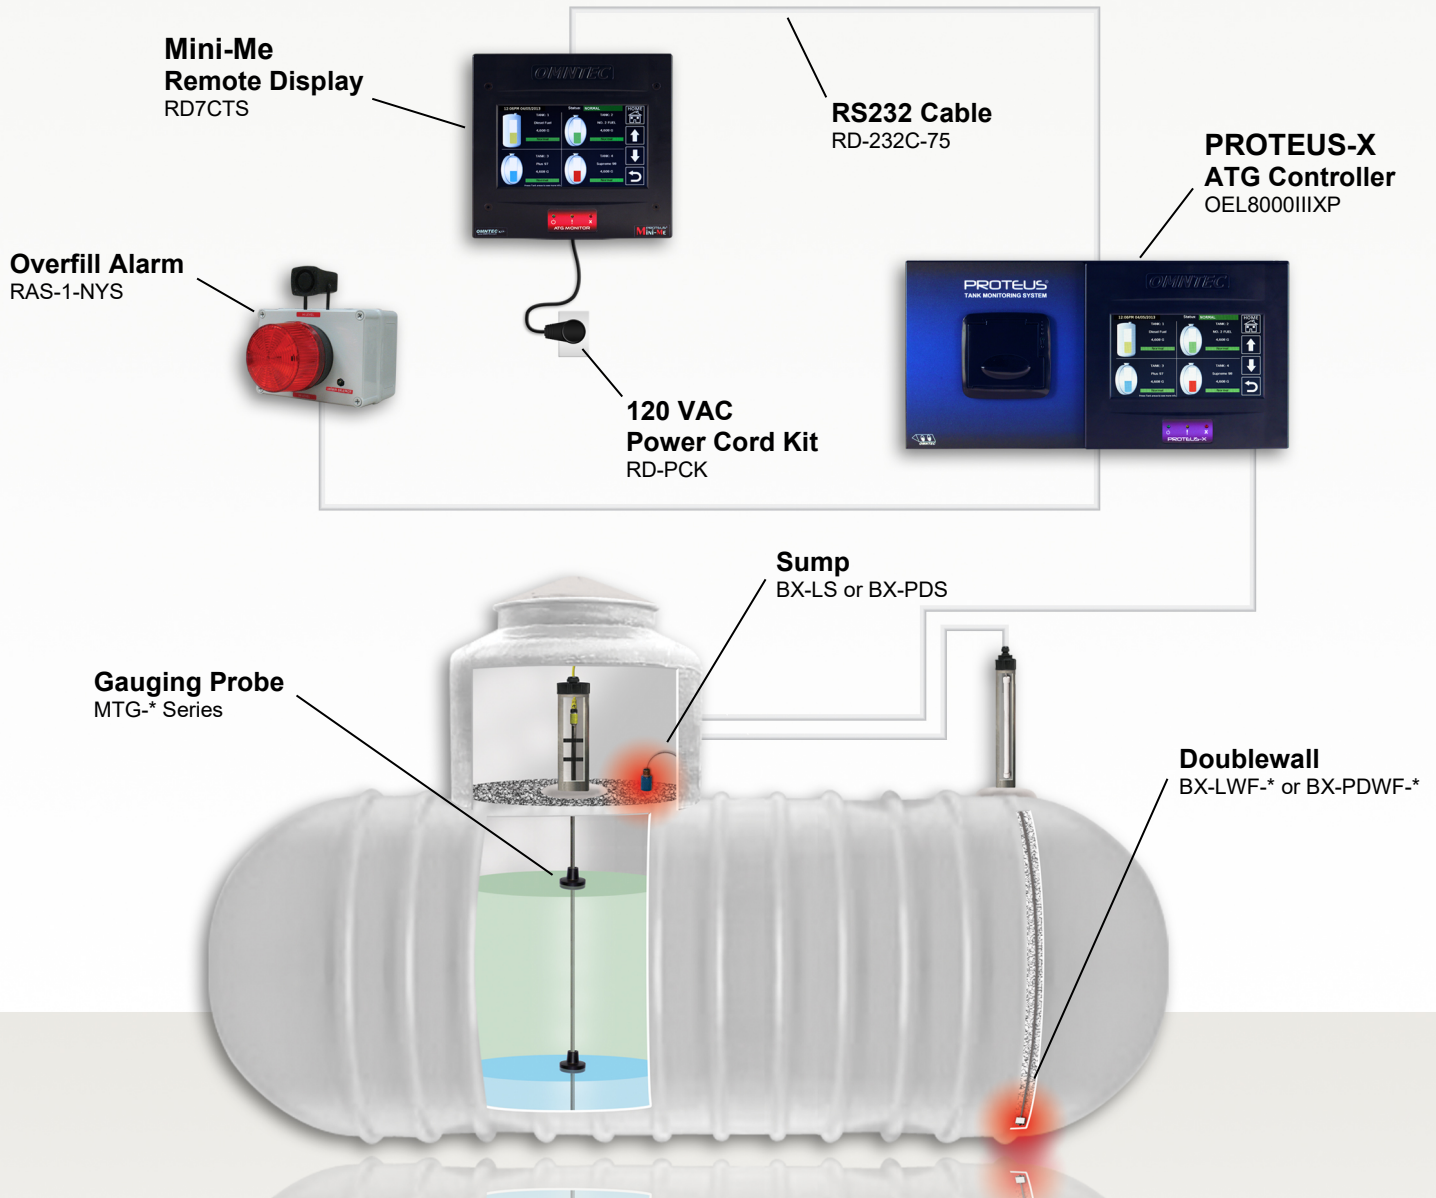