

**OMNTEC** 

Non-product distinguishing Fiberglass tank dry interstitial sensor

# **Principles of Operation**



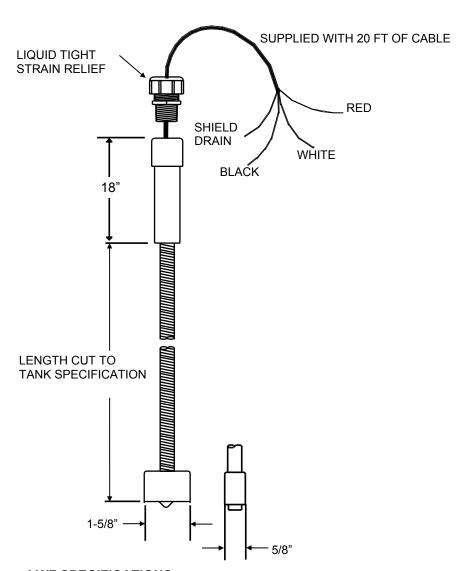

## **LWF SPECIFICATIONS**

## **OPERATING TEMPERATURE**

-40 TO +140 F

### **POWER** 2 VDC @ 13 mA

**WEIGHT** 2 pounds

### **PRINCIPLES OF OPERATION**

LIQUIDS (ex: fuel, water) - Photo Optic DRY CONDITION - Normally closed light beam ALARM CONDITION - Opens (refracts) normally closed light beam

## **SENSOR CABLE**

Shielded 22 AWG UL-E118830 CM Maximum length 2000 feet

#### **RESPONSE TIME**

**Immediate**